

# **R&D of a PEM Fuel Cell, Hydrogen Reformer, and Vehicle Refueling Facility**

**Mark F. Wait**  
**Air Products and Chemicals Inc.**  
**Allentown, Pennsylvania, USA**

**Scott Wilshire**  
**Plug Power, Inc.**  
**Latham, New York, USA**

**2004 Hydrogen and Fuel Cells Merit Review Meeting**  
**Philadelphia, PA**  
**May 27, 2004**

This presentation does not contain any proprietary or confidential information.


# Las Vegas Hydrogen Fueling and Energy Station – Compression, Storage and Fueling



# Las Vegas Hydrogen Fueling and Energy Station – Distributed Hydrogen Generation and PEM Fuel Cell Power Generation



# Nevada Hydrogen Project

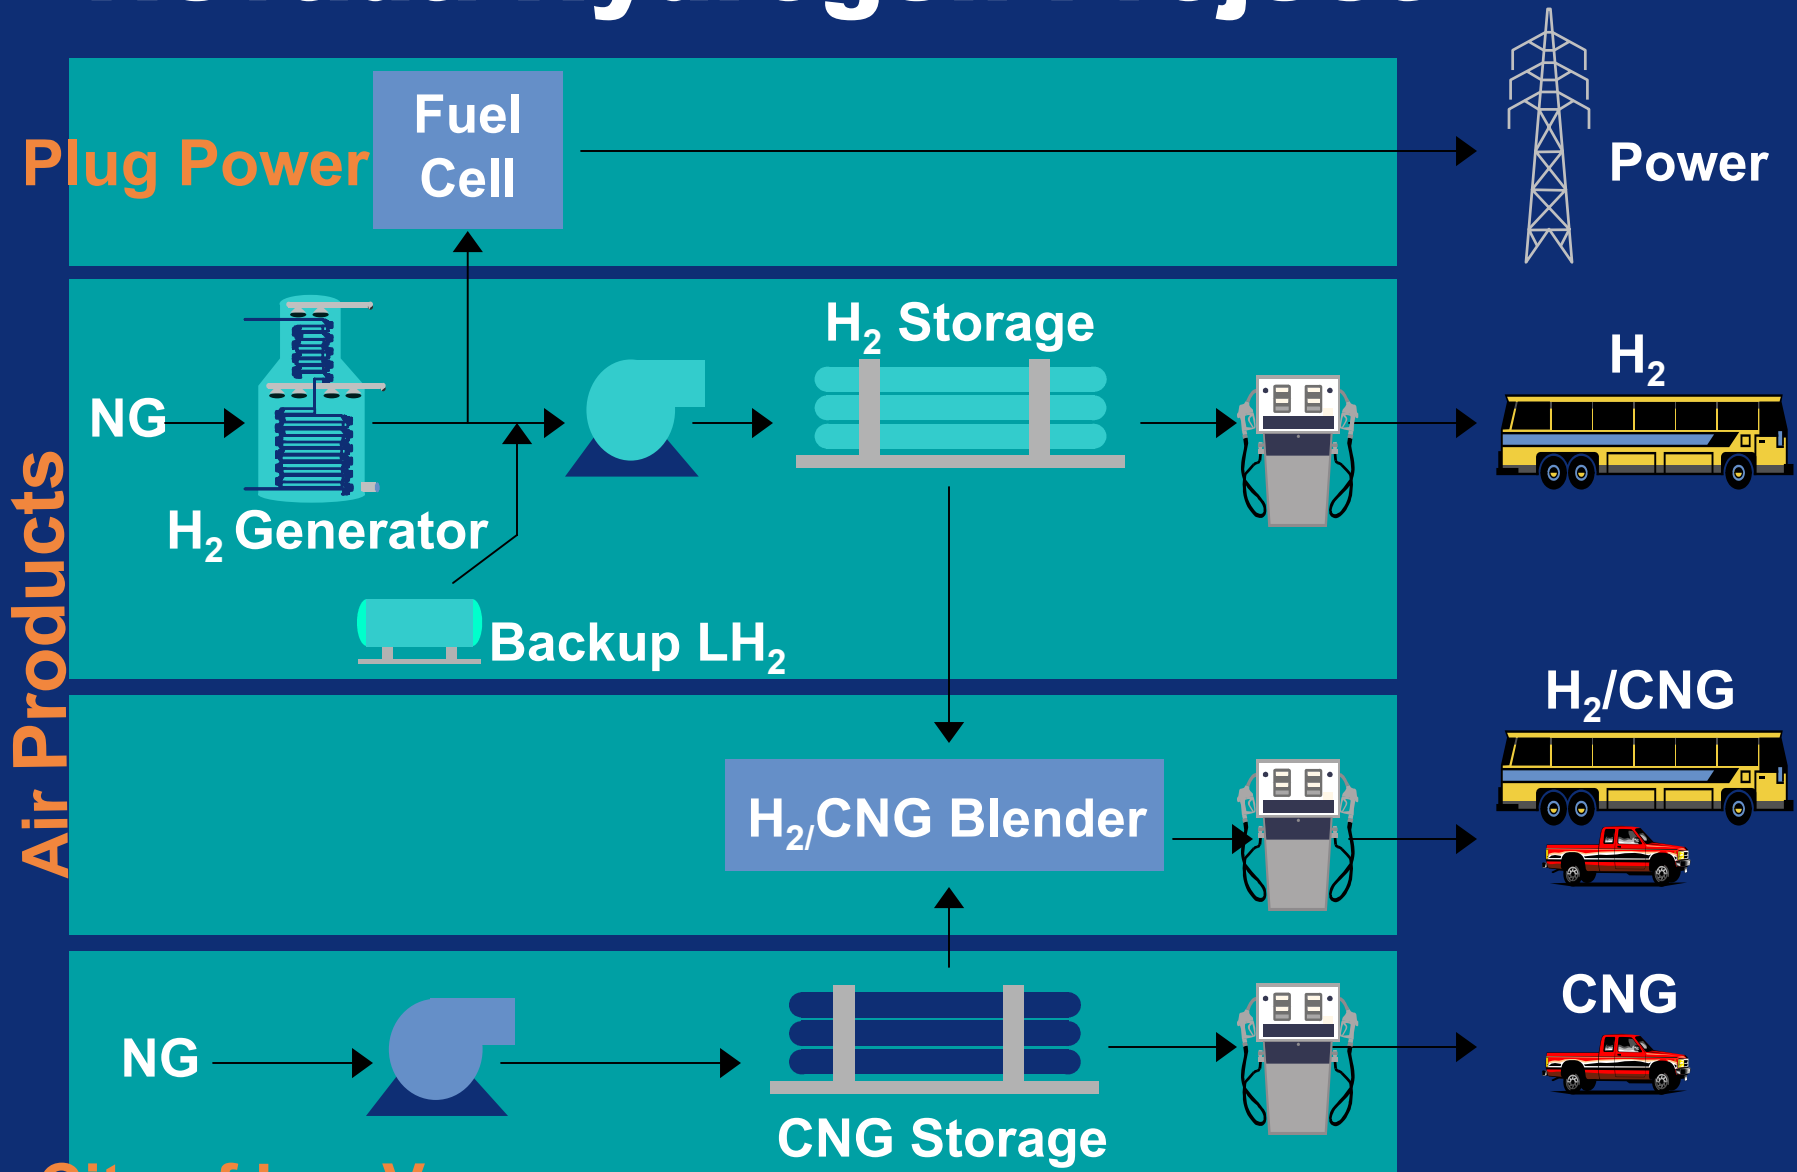

City of Las Vegas

# Program Objectives

- Demonstrate small, on-site H<sub>2</sub> production for fuel cell power generation and H<sub>2</sub> fueling station
- Demonstrate multipurpose vehicle refueling station to dispense H<sub>2</sub>/CNG blend and pure H<sub>2</sub>
- Demonstrate H<sub>2</sub>-fueled stationary 50kW fuel cell
- Evaluate operability/reliability/economic feasibility, and certify integrated power generation and vehicle refueling designs
- Expand the current facility to serve as the first commercial facility when sufficient hydrogen demand develops.

# FY03 Budget

- Total Project Budget:
  - \$13,118,282
- Cost Sharing to Date:
  - DOE - \$6,121,049
  - Air Products and Partners - \$6,121,075
- FY2004 Funding
  - DOE - \$360,000

# DOE Technical Barriers

## DOE HFCIT Multi-Year Plan

- Technology Validation (Section 3.5.4.2), Task #3.
  - B. Storage – Cost, Performance, Structural Integrity
  - C. Hydrogen Refueling Infrastructure – Cost of Hydrogen, Low Availability, Safe Systems
  - D. Maintenance & Training Facilities – Operating and Maintenance Requirements, Personnel Training
  - E. Codes & Standards – Lack of Adopted Codes and Standards
  - I. Hydrogen and Electricity Co-production – Cost and Durability, Permitting, Safety Procedures

# DOE Technical Targets

## DOE HFCIT Multi-Year Plan

- Table 3.1.2 , Technical Targets
  - Reformer Efficiency, 2003, %(LHV) – 70%
    - Vegas Result, 2000 design – 68% (Current test data)
    - Test data collected while producing < 1 ppm CO purity
    - Vegas has capability to meet target; additional operation to demonstrate capability
    - PSU Program will deliver improvements to 2005 targets
  - Cost of Hydrogen, 2003, \$/kg - \$5.00
    - Vegas Result - < \$5.00
    - Based on evaluation of Las Vegas Energy Station performance using HFCIT MYPP assumptions
    - PSU Program will deliver improvements to 2005 targets



# Technical Approach

- **Design, Build, Test**
  - Scaled extension of research
  - Real-world performance and durability testing
  - Site selection, permitting, safety, operability, reliability, maintenance experience clarifies research and development gaps
  
- **Severe Test Environment – Las Vegas**
  - Desert climate – high summer temps, occasional freezing temps in winter
  - 2000 feet above sea level
  - CO2 Non-attainment (Clark County)



# Technical Approach

- **Phase 1**
  - **Define System Requirements**
  - **Finalize System Definition to Requirements**
  - **System Engineering and Design**
- **Phase 2**
  - **Equipment Manufacturing**
  - **Detailed Design for Integrated System Installation**
  - **Installation, Commissioning and Start-up**
- **Phase 3**
  - **Demonstration Operation and Maintenance**
  - **Data Collection and Analysis**
  - **Feedback to Future Designs**
  - **Select Existing System Improvements**

# Project Timeline

ID	Task Name	2000				2001				2002				2003				2004			
		Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2
1	Phase 1 - Engineering and Design	[Bar]				[Bar]															
2	Phase 2 - Manufacture, Install, Start-up					[Bar]				[Bar]											
3	Phase 3 - Operation Period									[Bar]				[Bar]				[Bar]			

- Hydrogen Generator Start-up at Site Achieved August 2002
- Site Opening Dedication in November 2002
- Currently 6 Quarters into the scheduled two year demonstration operating period

# Project Safety

- **Safety Evaluated by DOE Safety Panel in Mar 04**
  - No major issues, some areas of interest:
    - Hydrogen fill rates
    - Underground piping
    - Mechanical joints
    - Pressurized Storage Vessel MIP
- **Site Safety Performance to Date Validates Design**
  - No safety incidents for site over 18 months of operation
  - 80+ fuel fills conducted without station incident
  - Inherently safe systems with safety instrumented controls
- **Vegas Energy Station Safety Efforts**
  - Hazop, MOC, Quantitative Risk as required
  - Use of applicable industry codes
  - Operational Readiness Inspection (ORI)
  - Trained Operating Personnel
  - Safety Performance Measured



# Technical Accomplishments – Hydrogen Generator

## ● Status Overview

- Over 2800 hours operation
- Satisfactory process operation and product purity capability
- One button start, load following, additional features
- Remote monitoring from Allentown / Sacramento

## ● Performance

- 68% LHV Efficiency achieved w/ year 2000 design basis equipment , < 1 ppm CO purity control; 70% LHV Efficiency is achievable
- Sound process technology implementation
- Some reliability issues – common component issues
  - Burner failure
  - Spurious thermocouple signals
  - Compressor vibration issues
- Interim inspection of equipment showed equipment in good mechanical condition



# **Technical Accomplishments – Hydrogen Generator (Cont)**

## **● Operating Experience Information**

- **Severe diurnal cycling affects ambient conditions, influencing process dynamics**
- **Seasonal ambient changes influence process dynamics**
- **Steam system dynamics and control**
- **More than sufficient instrumentation for safe and reliable control system, but always one or two other data points you could use**
- **Shutdown / Start-up thermal cycling potential longer term durability issue for catalyst**

## **● Next Operating Test Campaign**

- **Added primary air flow measurement**
- **Added steam flow measurement**
- **Added additional thermocouples along reformer tube to monitor thermal stratification**
- **2000 hour on-purpose test run in progress**

# Technical Accomplishments – Fueling Station (Cont)

- **Status Overview**

- **Approx. 70 H2 / CNG Fills**
- **Approx. 10 H2 Fills**
- **Fleet not yet established**
  - **One H2/CNG LDV (F150 Pick-up)**
  - **One H2/CNG Bus**

- **Performance**

- **Storage systems providing adequate capacity for current demand**
- **Dispenser engineering and design validated (2000 design basis, non-communication fill)**
- **Instrument air has been primary cause of isolated issues**



# City of Las Vegas H2 / CNG Bus






# Project Overview


- ❖ Completed Fuel Cell system detailed design, fabrication, and testing.
  - Plug Power's first large scale stationary system.
- ❖ Initial startup and qualification testing yielded a number of design changes related to component selection, control and electronic equipment, software algorithms, and gas delivery systems.
- ❖ Executed test program to first qualify individual subsystems followed by final system configuration testing.
- ❖ Test data provided an operational baseline and validation of the interface conditions to support integration into the refueling station.
- ❖ Shipped 50 kW fuel cell system to Las Vegas - October 2001.
- ❖ System commissioned September 2002.

# Overview & Equipment

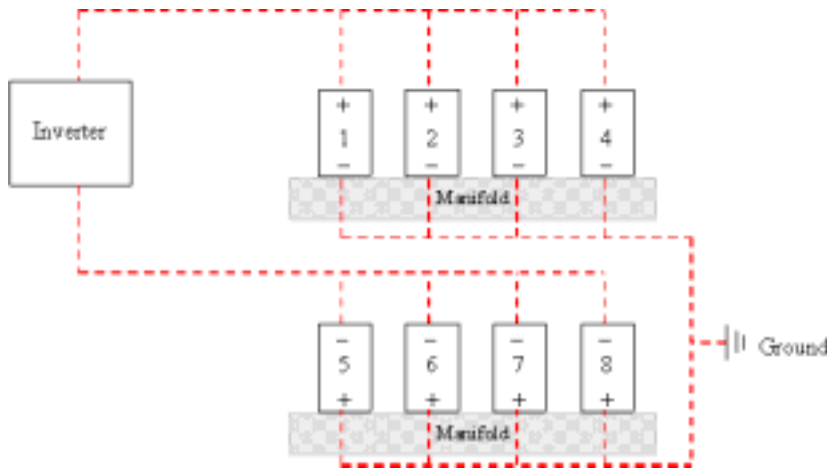

Parameter	Specification
Installation Location	Outdoor
Grid Parallel	Yes
Power Output/Set points (approximate)	15kW, 30 kW, 50 kW
Remote monitoring capability	Via phone line and modem
Electrical Output	480 VAC, 3 Phase, 60 Hz
Power Quality	IEEE 519 or better
Ambient Design Conditions	Minimum Temperature: 10 °F Maximum Temperature: 115 °F
<b>Fuel Supply</b>	Hydrogen
Purity	98 % to 99.9 %
Operating Supply Pressure	< 100 ppm hydrocarbons
Maximum Design Pressure	<1 ppm carbon monoxide
H2 Supply Temperature	<1 ppm sulfur 100 +/- 10 psig 150 psig -30°F to 140°F

# Overview & Equipment

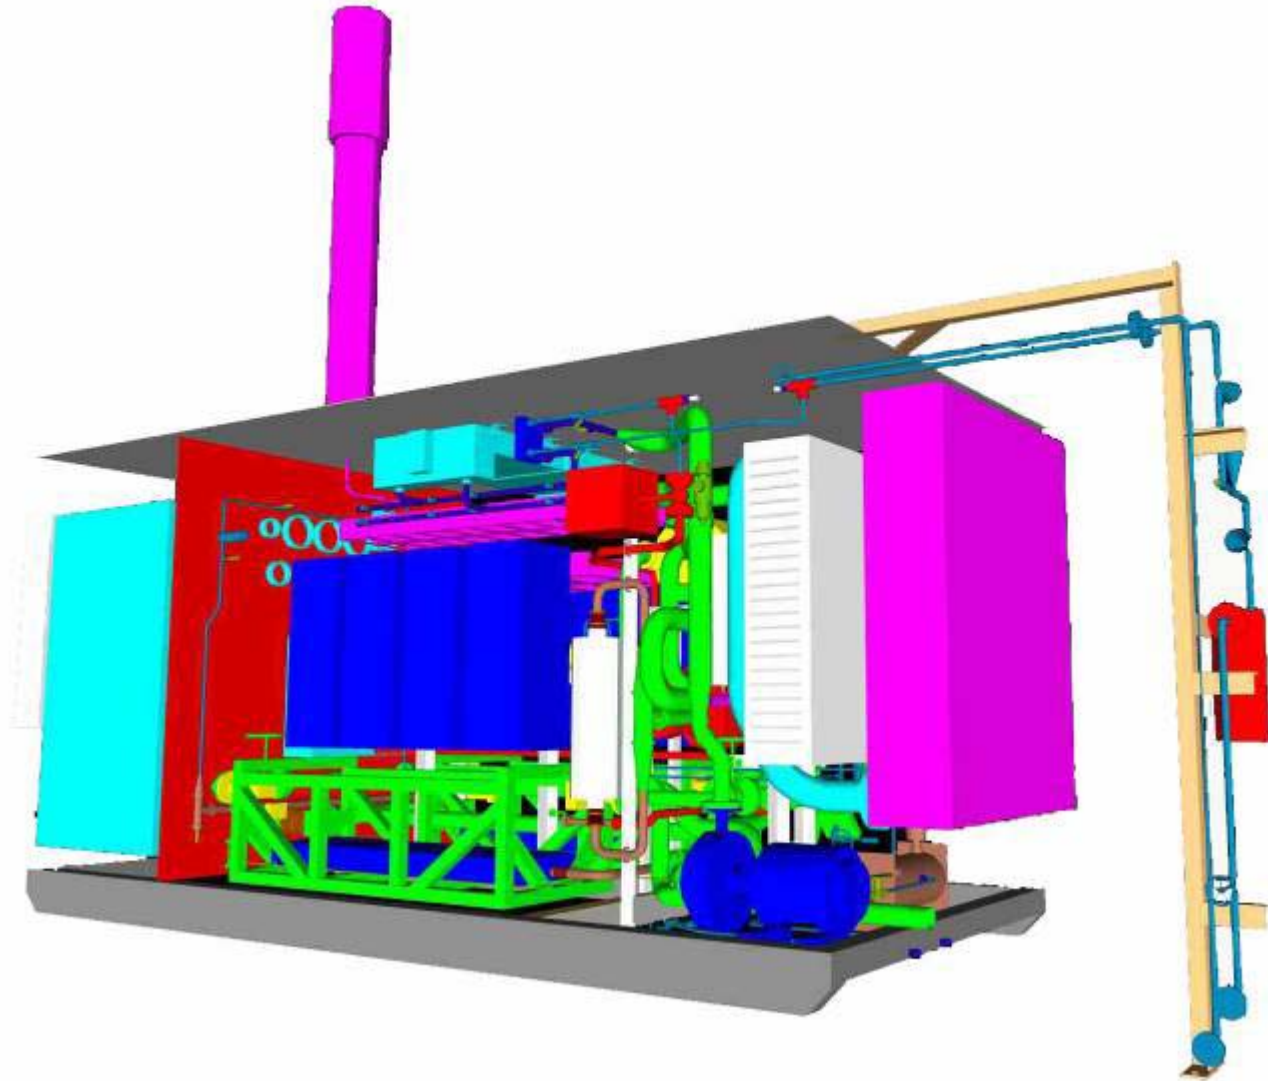

# Key Technical Barriers \*

## ❖ Cost of Electricity (COE)

- Plug Power utilizes a COE approach to assess in order of importance, elements of fuel cell operations on the pathway to commercial viability. The COE model has three elements.
- **Capital or First Cost**
  - O. Stack Material & Manufacturing Costs
- **Operating and Maintenance Cost**
  - E. Durability
  - R. Thermal & Water Management
- **Energy Conversion Efficiency**
  - F. Heat Utilization
  - G. Power Electronics

\* as identified in the Multi-Year Research, Development, and Demonstration Plan Section 3.4.4.2 – Barriers

# Technical Barriers

## ❖ Fuel Cell System

- Approach changed from single stack to eight manifolded stacks
- Limited experience in manifolding stacks, cell voltage scanners
- Balance of plant issues included cathode humidification
- Overall control system utilized Lab View - lacked robustness and ability to easily change software as changes were identified
- Limited lifetime of this generation of stack materials (200 hours in 2001 to >8000 hours today)
- Electrical integration and control of stacks required development of new approaches
- Viability of system design deemed not able to be made commercially viable. First cost of \$6000 per kW too high for marketplace

## ❖ Site Integration

- Initial experience in connecting fuel cell to third-party reformer
- Grid interconnection initially challenging (approvals)

# Technical and Program Accomplishments

## ❖ Fuel Cell System Design


- Cell voltage monitoring critical to reliability
- Ability to leverage existing design (Platform approach)
- System integration experience
- Key learning of electrical noise issues, resolutions
- Manifolding stacks
- Three Phase Inverter integration
- Basic understanding of stack humidification & water management

## ❖ Site Integration

- Fuel cell system – Reformer integration.
- Hydrogen design requirements


# Technical and Program Accomplishments

Las Vegas System Run Summary  
8/2/02 - 9/19/03

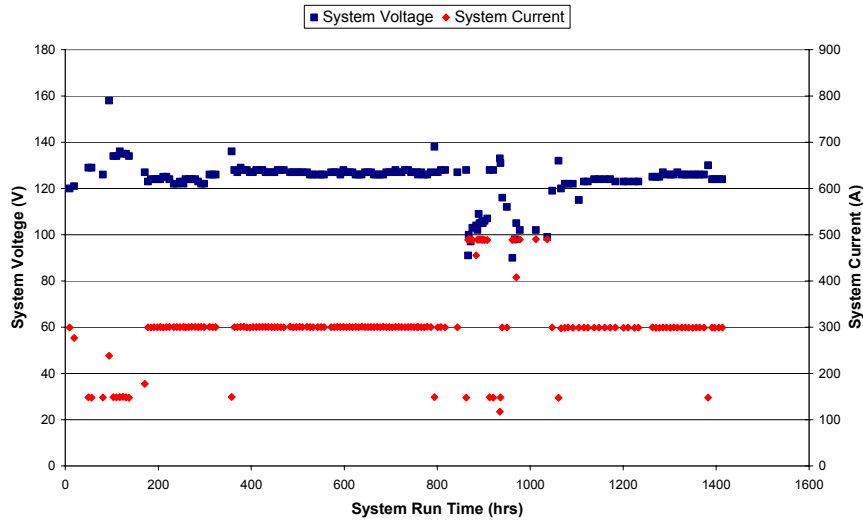


System Run Time: 1414 hours  
Power Produced: 43,500 kWh  
System Efficiency: 36.3%  
Stack Efficiency: 46.8%

Las Vegas System Voltage at 300 A  
8/8/02 - 10/7/02

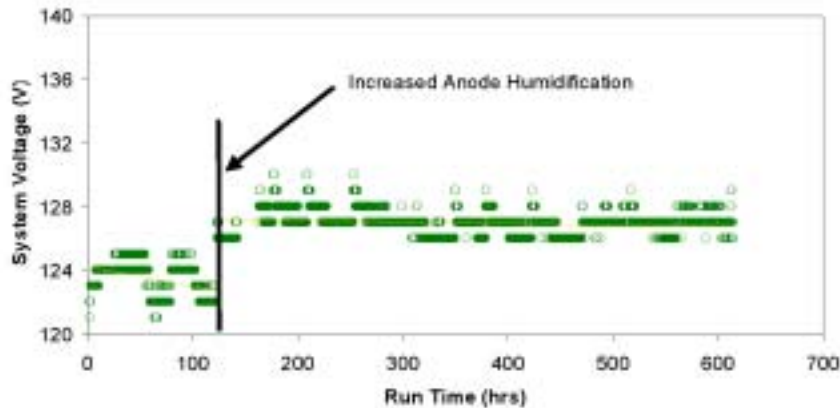

Impact of humidification change  
Cell degradation rate decreased  
to 5 $\mu$ V, translating to projected  
stack life of 12,000 hours.

# Adoption (as a function of Technical Barriers)

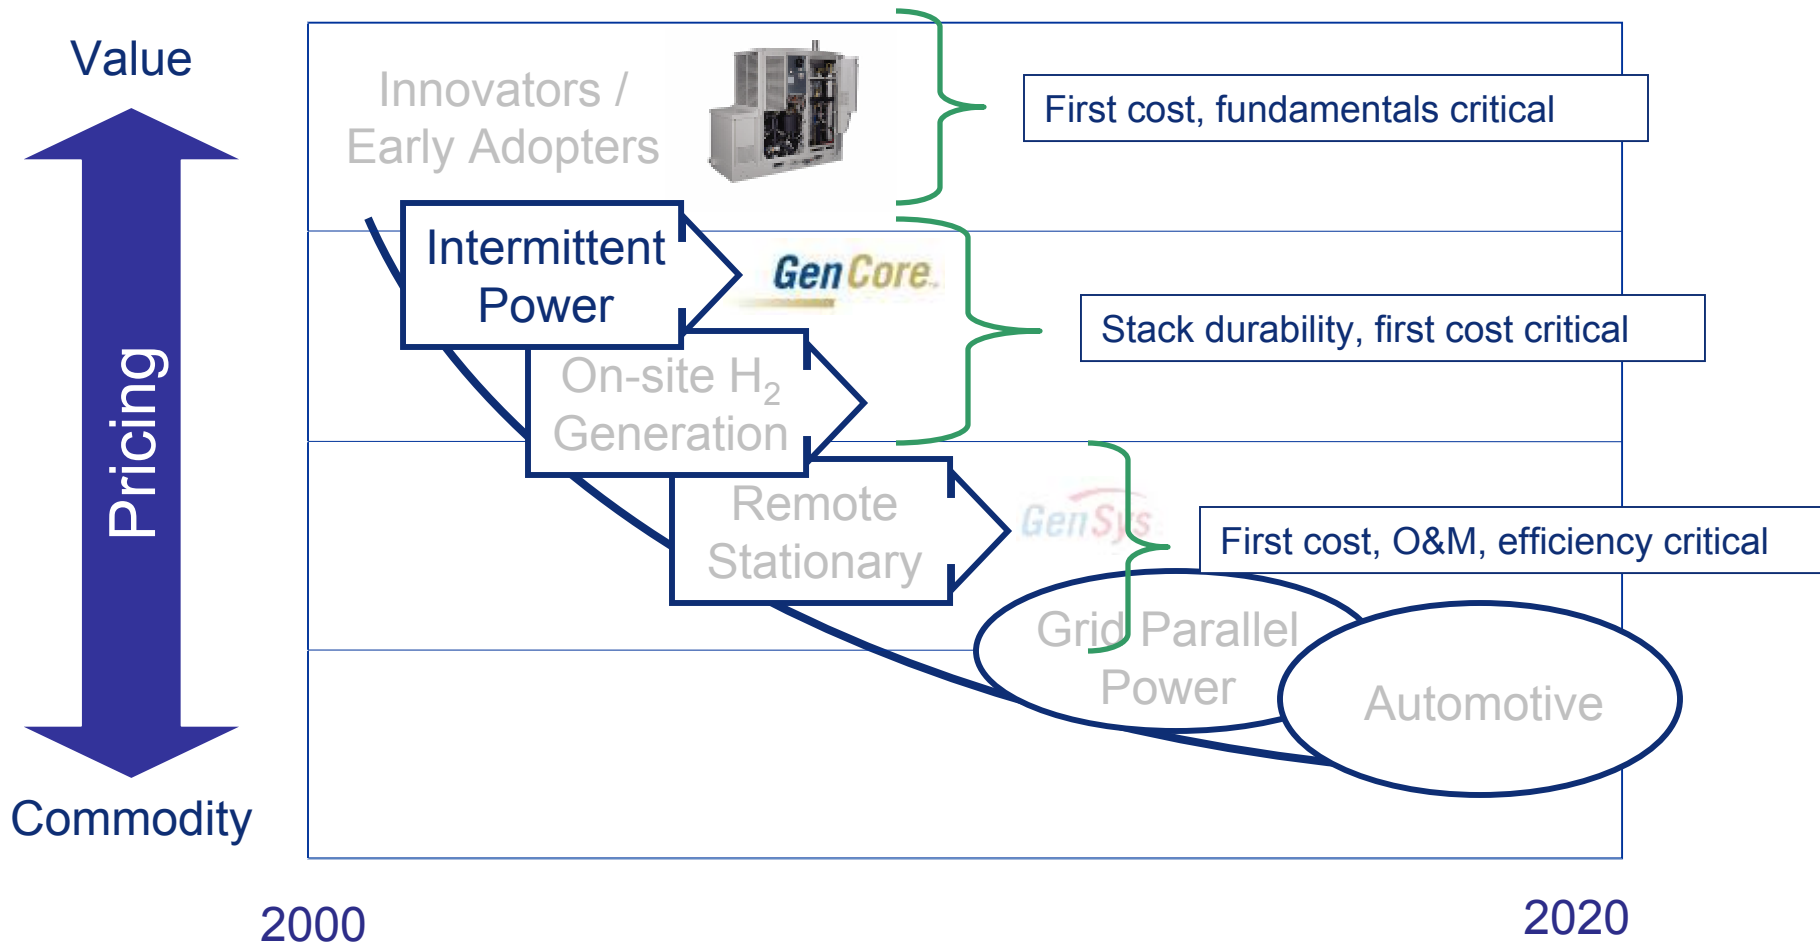



Scott Wilshire

Director of Marketing Engagement

518-782-7700 X1338

[scott\\_wilshire@plugpower.com](mailto:scott_wilshire@plugpower.com)

# Responses to Prior Year Comments

- **Data Collection, Analysis and Econ Evaluation**
  - Interim evaluations concluded and reports in process
  - Data exchange with collaborating entities underway
  - Additional data collection and evaluation to follow
- **Site Footprint ( relatively large footprint)**
  - Energy Station site took advantage of available plot
  - Additional unoccupied foundation is part of site
  - Other Air Products sites are much smaller
  - PSU site will be much smaller
- **Educational Benefits**
  - Significant international and national visitor traffic
  - International Energy Agency
  - DOE Safety Panel
  - Numerous conference tours (PowerGen, APTA, etc.)
  - Permit experiences shared

# Future Work

- **Conclude current operating period**
  - **Collect operating data for analysis**
    - **Addl Generator analysis for added data pts**
    - **Addl economic evaluation**
    - **Incorporation of lessons learned into PSU**
      - **H2 Generator Packaging**
      - **H2 Generator Process and Control Improvements**
      - **System Design, Costs and Economics**
  - **Support CLV fleet expansion**
- **Planning for continued DOE support of site beyond current operating period**
  - **Potential for upgrade of fueling systems for 350 Bar / 5000 psig fueling ( systems mechanically rated for 5000 psig)**
  - **Potential for upgrade of fueling systems for communication based fill**
  - **Continued use of Vegas asset as a R&D test bed facility**
  - **Support Vegas Fleet Build-out**
    - **Current fleet of 268 CNG vehicles**
    - **Progressive in testing / adopting alternative fuels**

# Collaborations

- **Special Thanks to Dr. Venki Raman, Air Products**
- **DOE HQ and Golden Field Office**
- **Dan Hyde, City of Las Vegas Fleet Site Mgr**
- **Plug Power – Rob Dross, Dave Parry, Bob Sinuc, Scott Wilshire**
- **Sandia National Laboratory – Andrew Lutz**
- **International Energy Agency**
- **DOE Safety Panel**

**PLUG POWER. PLUG WILL.**

Thank you

tell me more

[www.airproducts.com](http://www.airproducts.com)