Novel Approaches to Immobilized Heteropoly Acid (HPA) Systems for High Temperature, Low Relative Humidity Polymer-Type Membranes

Andrew M. Herring
Colorado School of Mines
Mathew H Frey
3M Corporate Research Materials Laboratory

5/11/11

Project ID
FC039

This presentation does not contain any proprietary, confidential, or otherwise restricted information

Overview

Timeline

- Project Start: April 1st 2006
- Project end: September 30th, 2011 (6 month NCE)
- 100% Complete

Barriers

- C **Performance**
- B **Cost**
- A **Durability**

Budget

- Total project funding
  - DOE - $1,500K
  - Contractor - $376K
- Funding for FY10
  - $300K ($45K)
- Funding for FY11 to date
  - $100K ($45 K)

Partners

- 3M - Industrial
- Project lead - CSM

Objectives/Relevance

•Overall	•Demonstrated a hybrid HPA polymer (polyPOM) from HPA functionalized monomers with: – σ >0.1 S cm^{-1} at 120°C and <50% RH (Barrier C)
• 2010	•Optimize hybrid polymers in practical systems for proton conductivity and mechanical properties - acheived (Barrier C and A)
• 2011	•Optimize hybrid polymers for proton conductivity, mechanical properties, and oxidative stability/durability (Barrier A, B, and C)

Unique Approach

- Materials Synthesis based on HPA Monomers and attachment to commercially viable polymers, Novel "High and Dry" proton conduction pathways mediated by organized HPA moieties – A NEW Ionomer System
- *Generation I films* – Acrylate co-monomers, polymer system in a kit,
- *Generation II films* – TFVE co-monomers
- *Generation III films* – Attachment to 3M Dyneon Fluoroelastomers

Approach - use Functional Inorganic Super Acids: Heteropoly acids

- +
  - High proton conduction, *e.g.* 0.2 S cm^{-1} at RT for 12-HPW
  - Thermally stable at the temperatures of interest, <200 °C
  - Synthetically Versatile - even simple salts are interesting
- +/-
  - Water soluble – but easily immobilized by functionalization in polymers
  - Reduced form – electrically conductive, but fuel cell membrane environment generally oxidizing, however can be used to advantage on anode
  - Proton conductivity dependency on water content/interaction with polar/protonic components
  - Known to decompose peroxides

Previous Accomplishments

Generation I Films – PolyPOM85v/BA

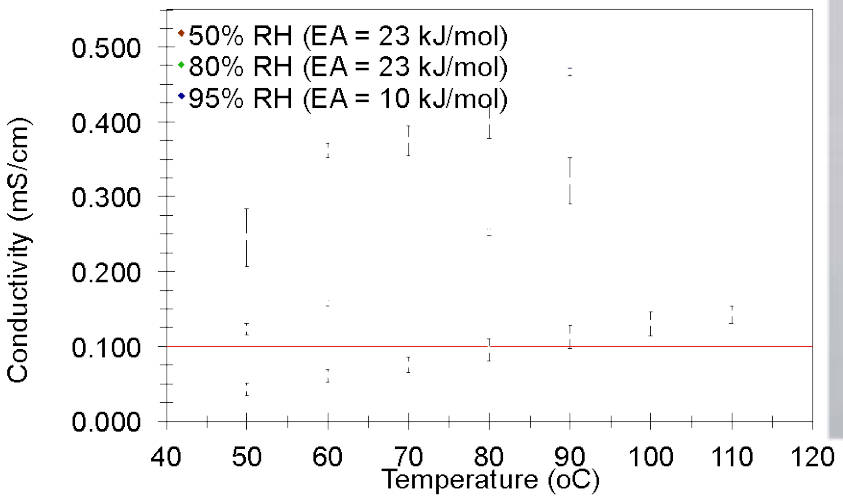

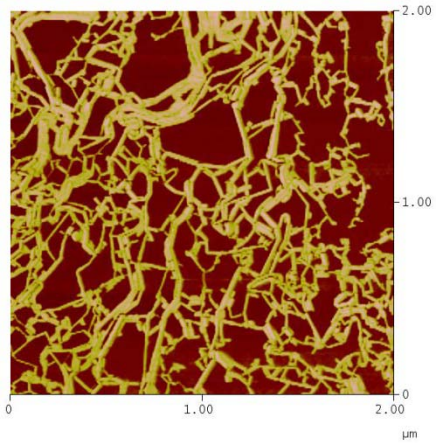

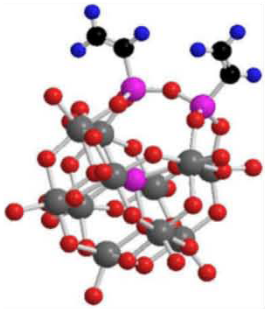

3wt%,
$H_4[SiW_{11}O_{40}(Si(CH{=}CH_2))_2]$

+

0.9 wt%, Butylacrylate



0.1 wt%, Hexanediol diacrylate

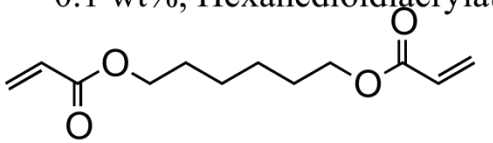

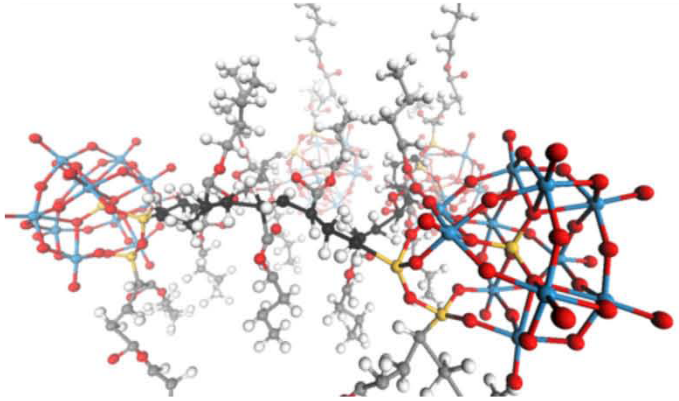

[P(SiW1175v-co-BA-co-HDDA)]
(PolySiW11(75)BA)

Films Generally thick but ASR <0.02 Ω cm^2

Progress - Generation II Films TFVE-HPA copolymers

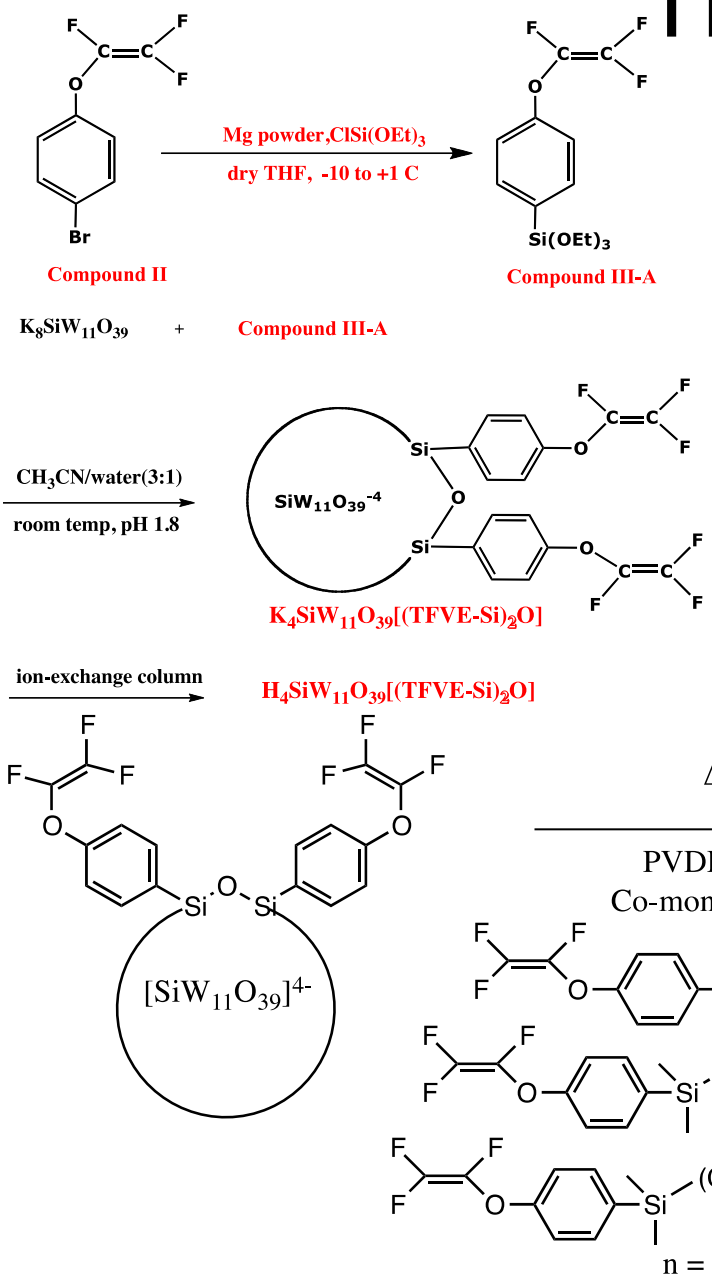

- Trifluorovinyl ethers (TFVE) functionalized HPA monomers synthesized on <100g scale
- Trifluorovinyl ethers polymerize thermally
- Large number of co-monomers available

Proton Conductivity - Variable

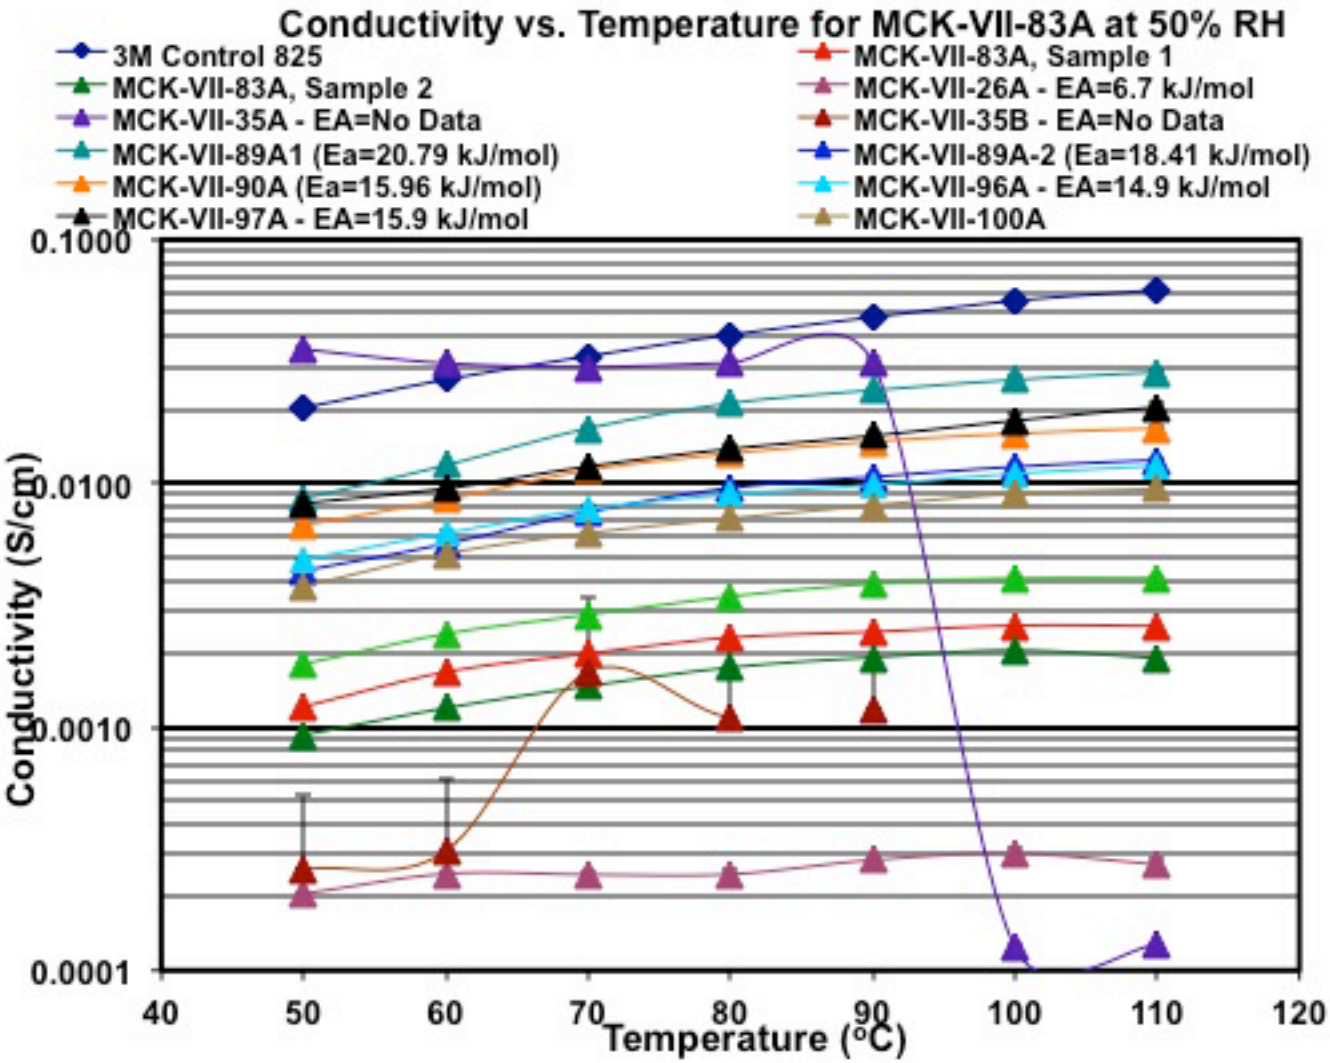

- Appears to synergistically vary based on film forming, chemistry, and morphology – complex design space

Conductivity Dependence on Morphology at 80 °C, RH 80%

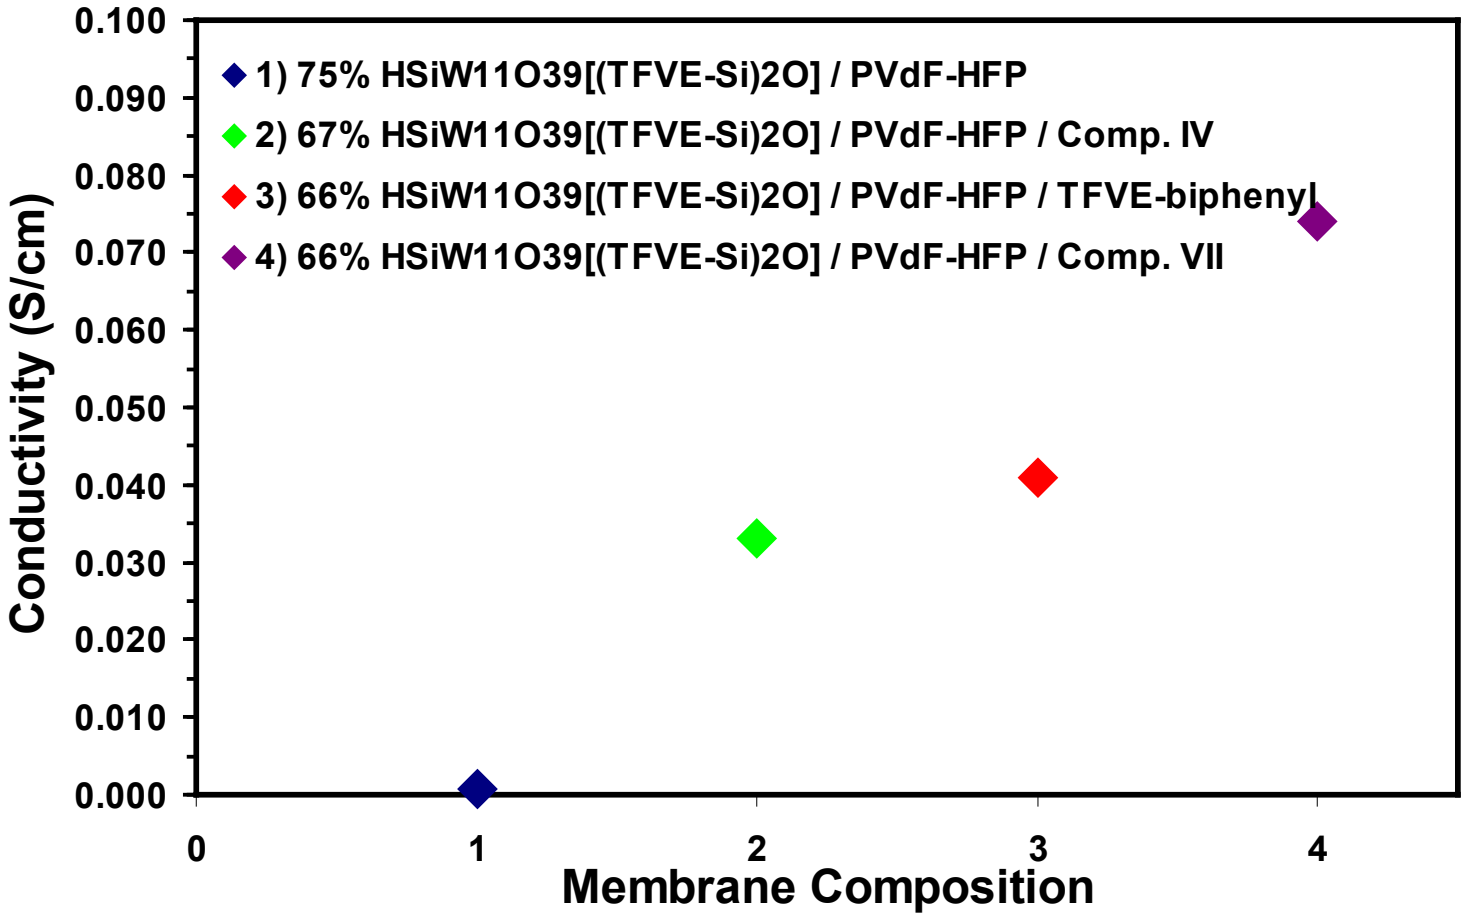

For hybrid TFVE membranes

Wt% based on $HSiW_{11}O_{39}[(TFVE\text{-}Si)_2O]$ monomer present

- 1st Approximation co-monomer chemistry important

Crystalline Phases observed at low RH

SAXS, 25%, 50%, 75% and 95% RH and 80 °C

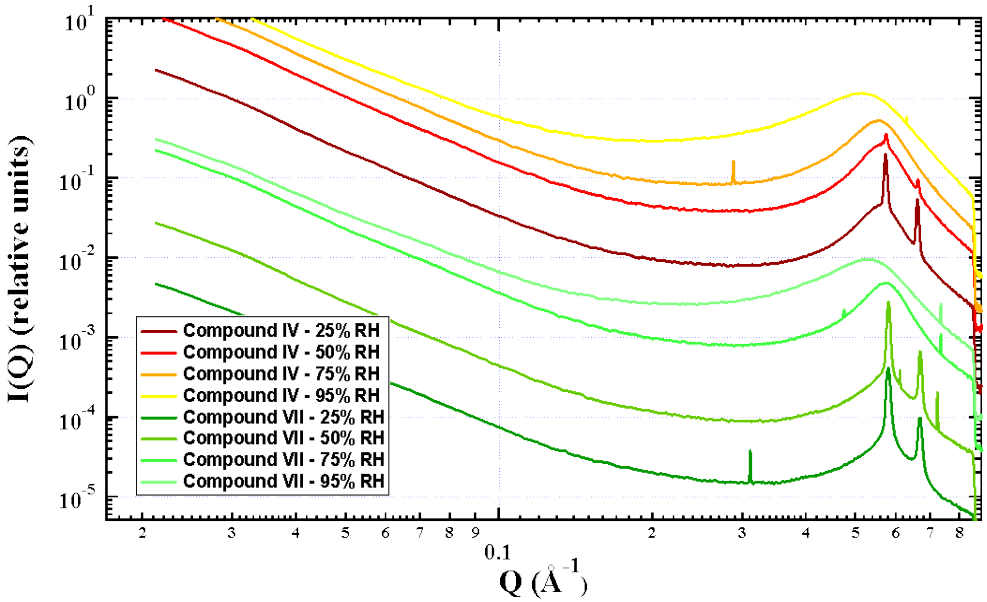

DVS, 60 °C

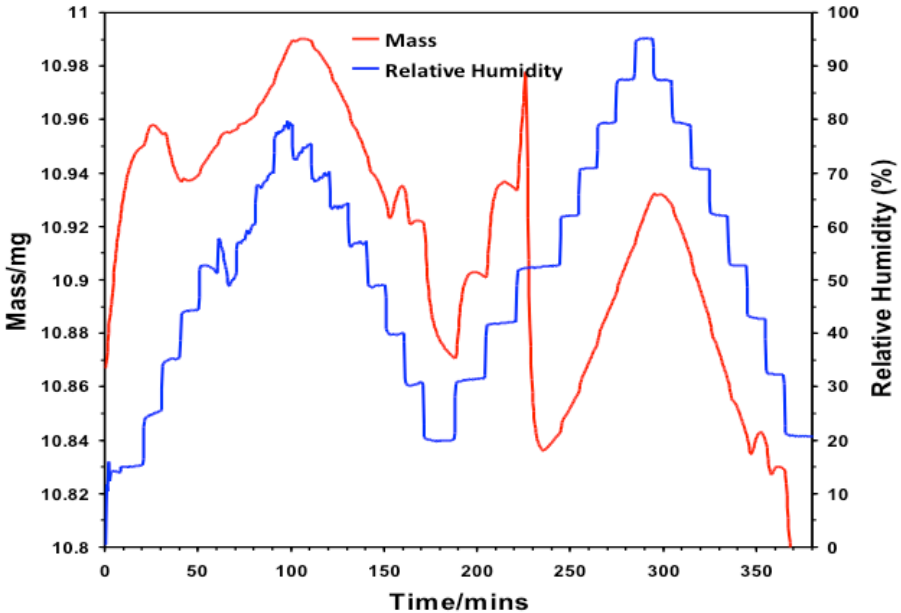

- Bragg peaks observed at low RH in SAXS, Phase changes observed at low RH in DVS
- Amorphous phase is the highly conducting phase
- Water content decreases on RH cycling (implies hard to measure equilibrium properties and increasing brittleness on cycling)

Mass % Water Uptake of Three Different Membranes

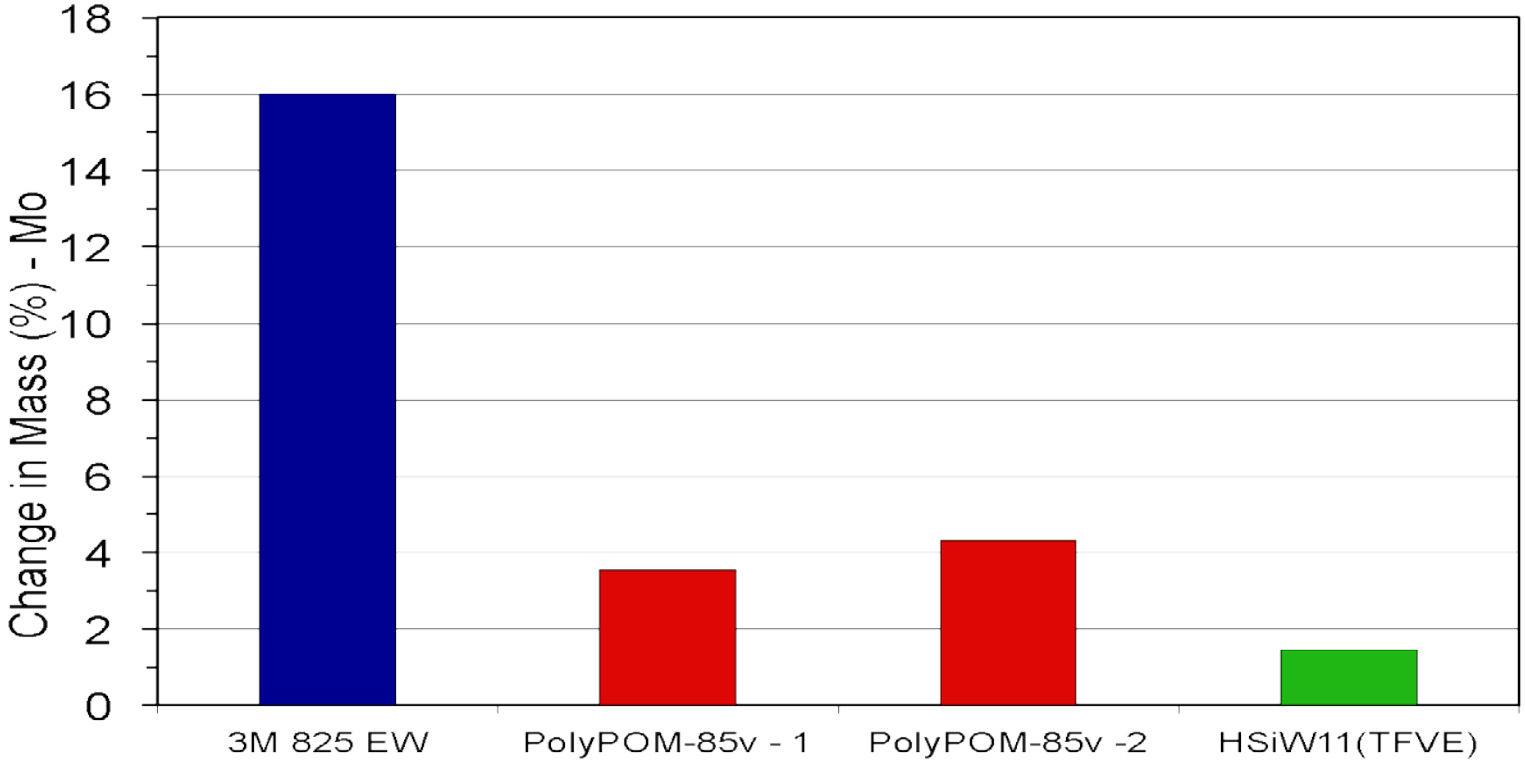

Digital vapor sorption – total over 2 relative humidity cycles, based on initial mass (M_o)

•HPA containing membranes have considerably less water uptake than PFSAs

Progress, Generation III Polymer – Synthesis

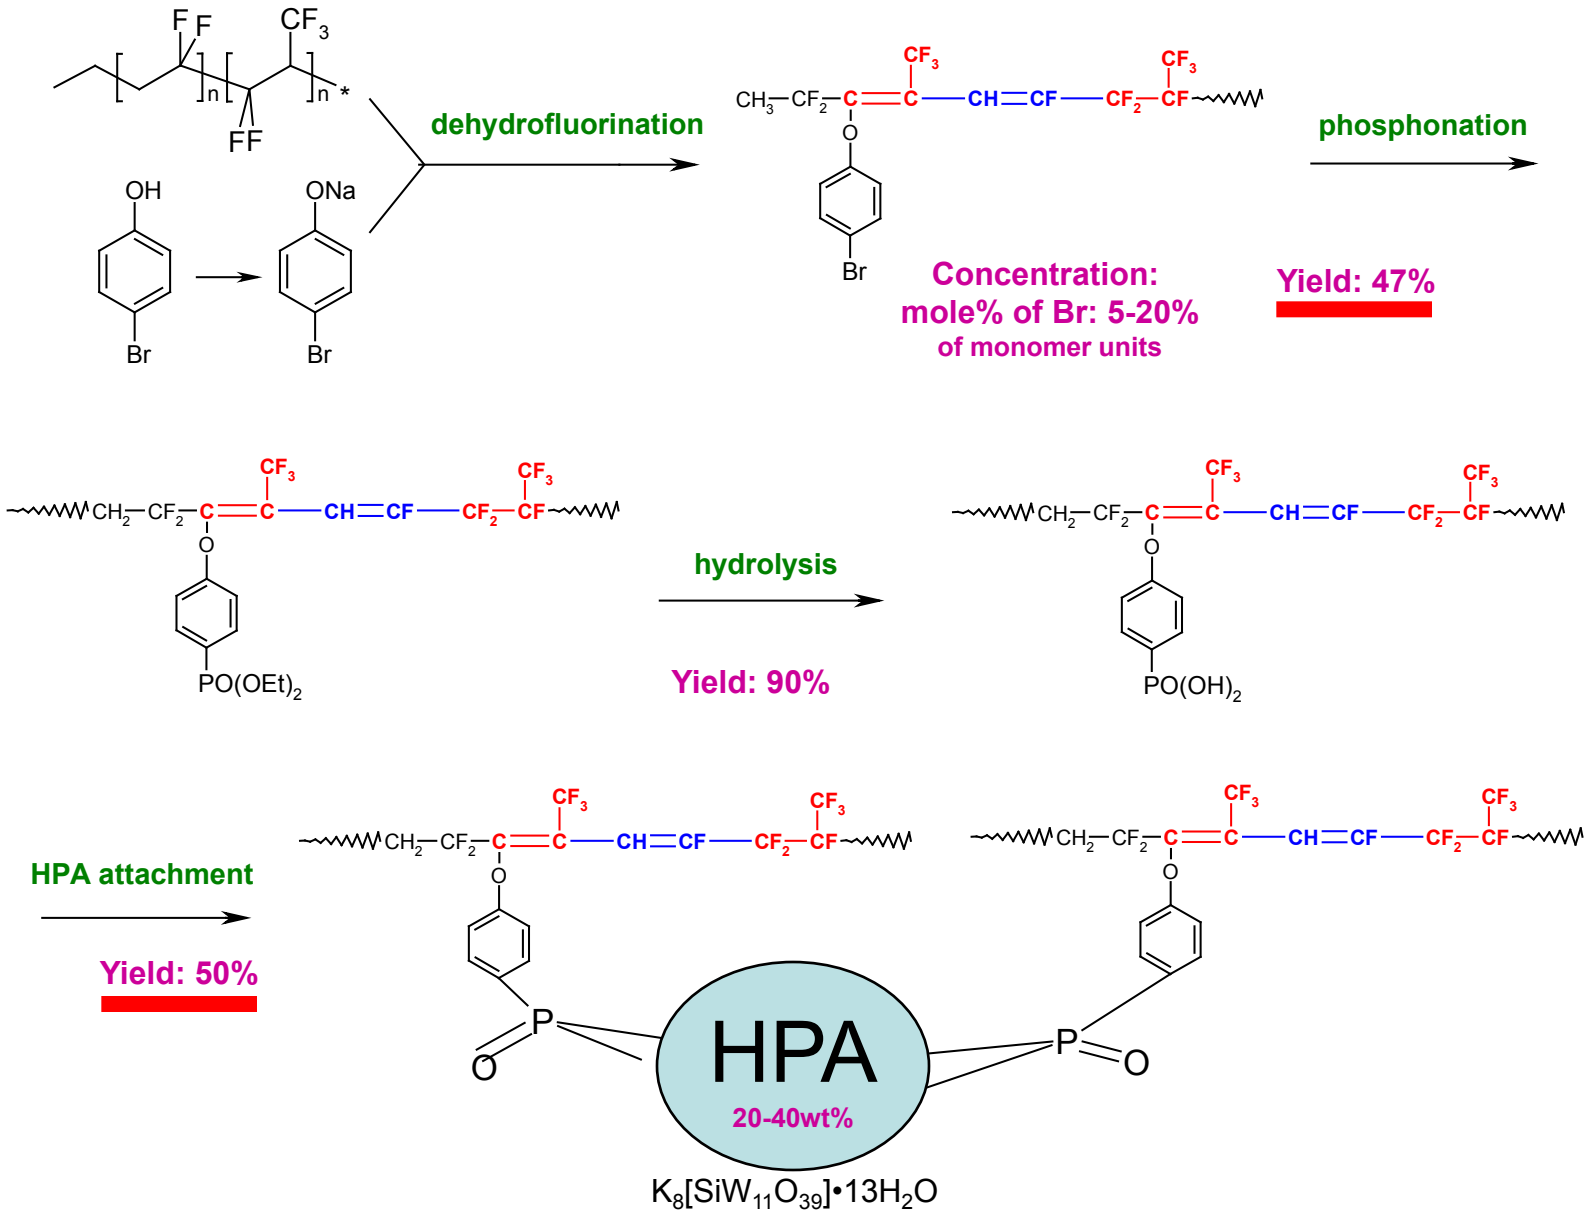

Membrane Processing

HPA attached, acidified hybrid fluoropolymer (crumb) was dissolved in DMSO at 4% concentration. Solution was then cast on ClearSIL®T10 silicone coated liner (or Kapton® polyimide (PI) liner in some cases). The resulting membrane below was first heated at 120ºC for 10min; Temp was then increased to 180ºC, membrane was heated at 180ºC for 10min.

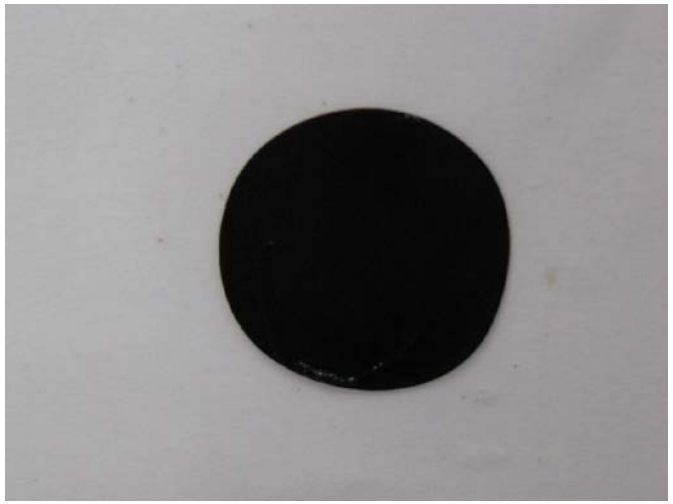

HPA attached hybrid fluoropolymer membrane cast on T10.

- Film processing critical to high performance

Morphology

AFM imaging --- Phase Image (recorded at CSM)

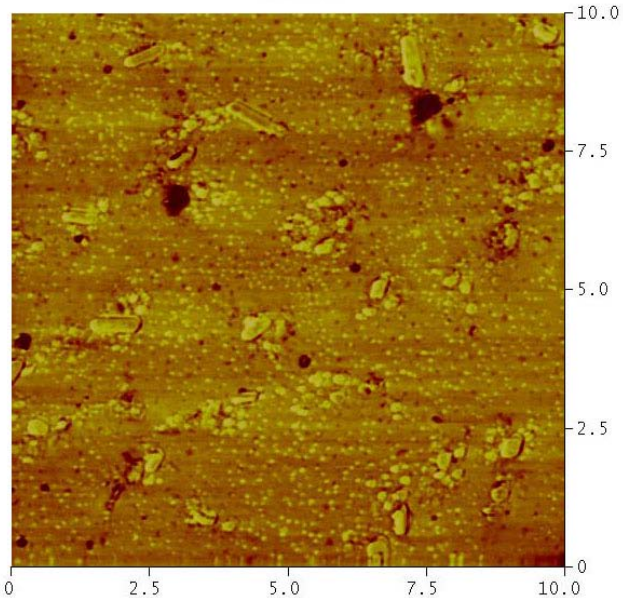

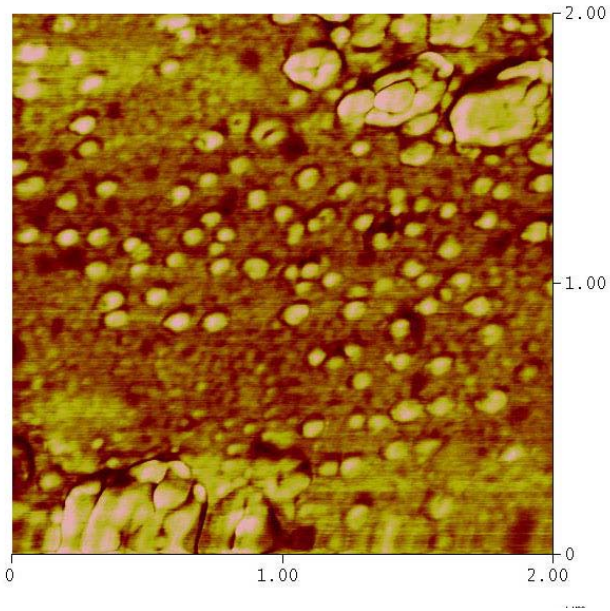

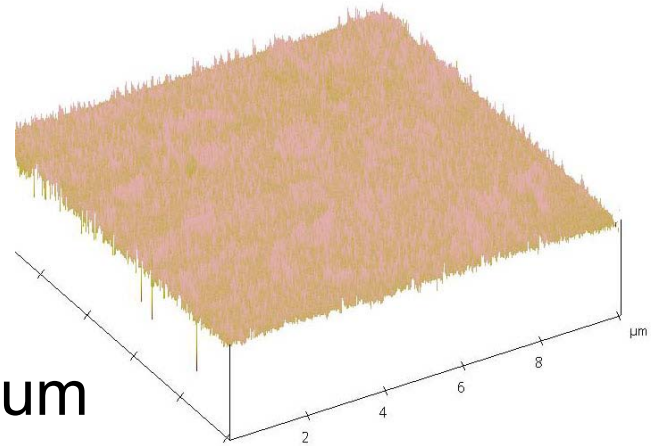

10um

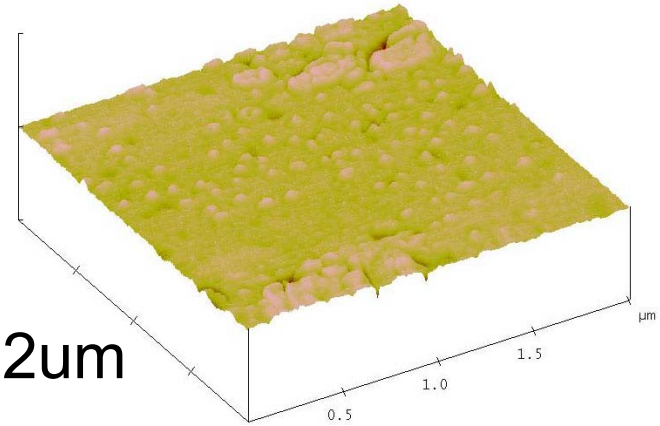

2um

Proton Conductivity, 80°C

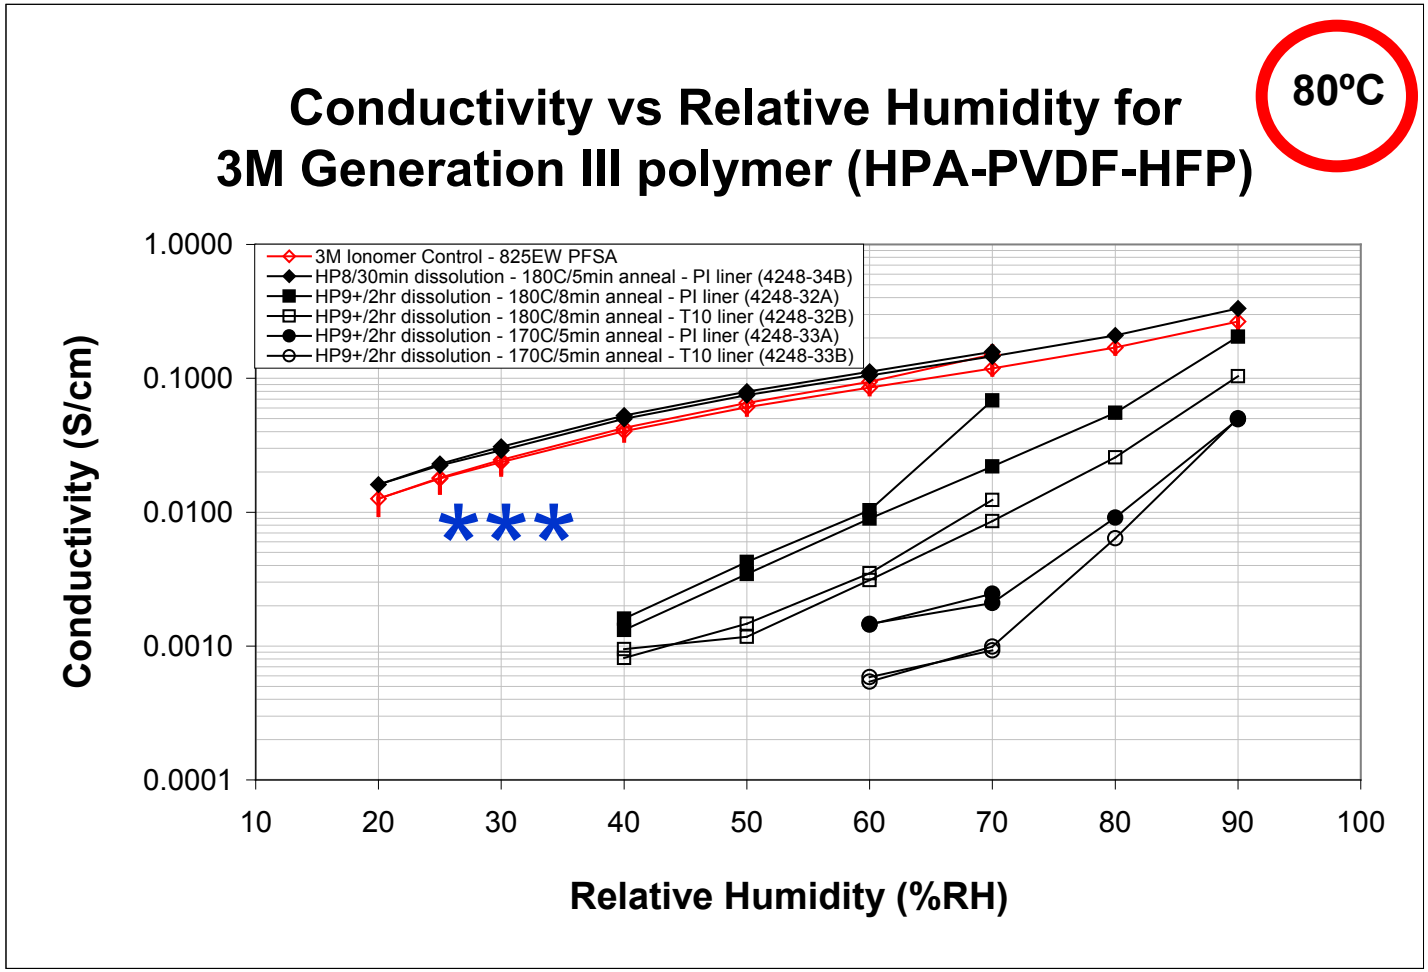

Measured by Michael Emery, 3M
TestEquity oven, atmospheric pressure
Bekktech sample fixture

HP: Hot plate setting
PI: Kapton® polyimide
T10: ClearSIL®T10 silicone coated

*** Incompletely dissolved in DMSO (casting solvent); tested in November 2010; 37% HPA

- Film forming critical to high performance

Proton Conductivity, 95, 120 °C

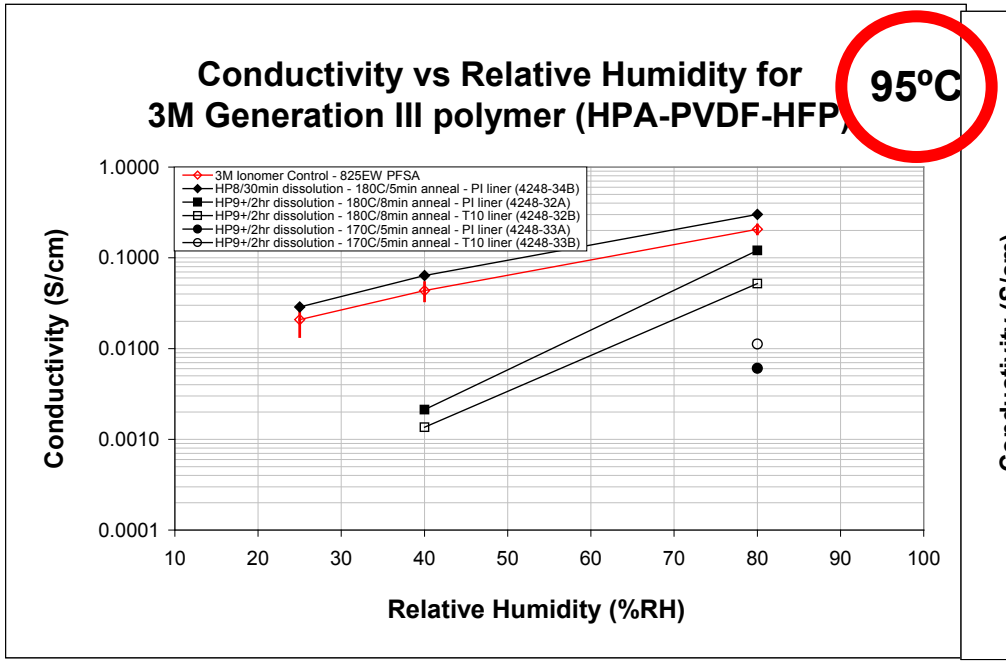

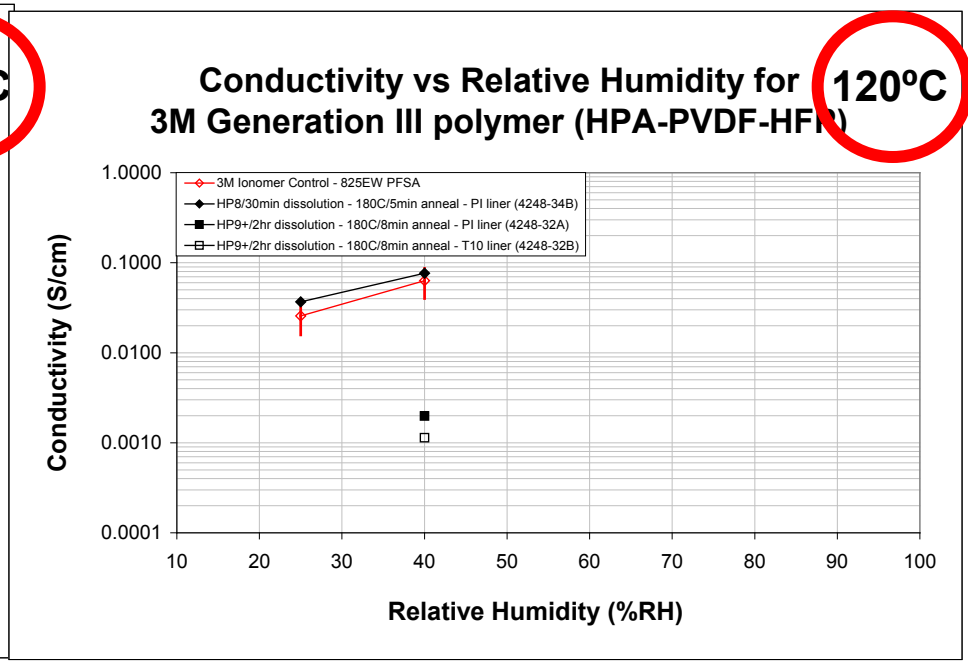

- Conductivity very impressive for 37wt% HPA loading
- With optimization of loading and film properties all targets could be met.

Tensile Testing

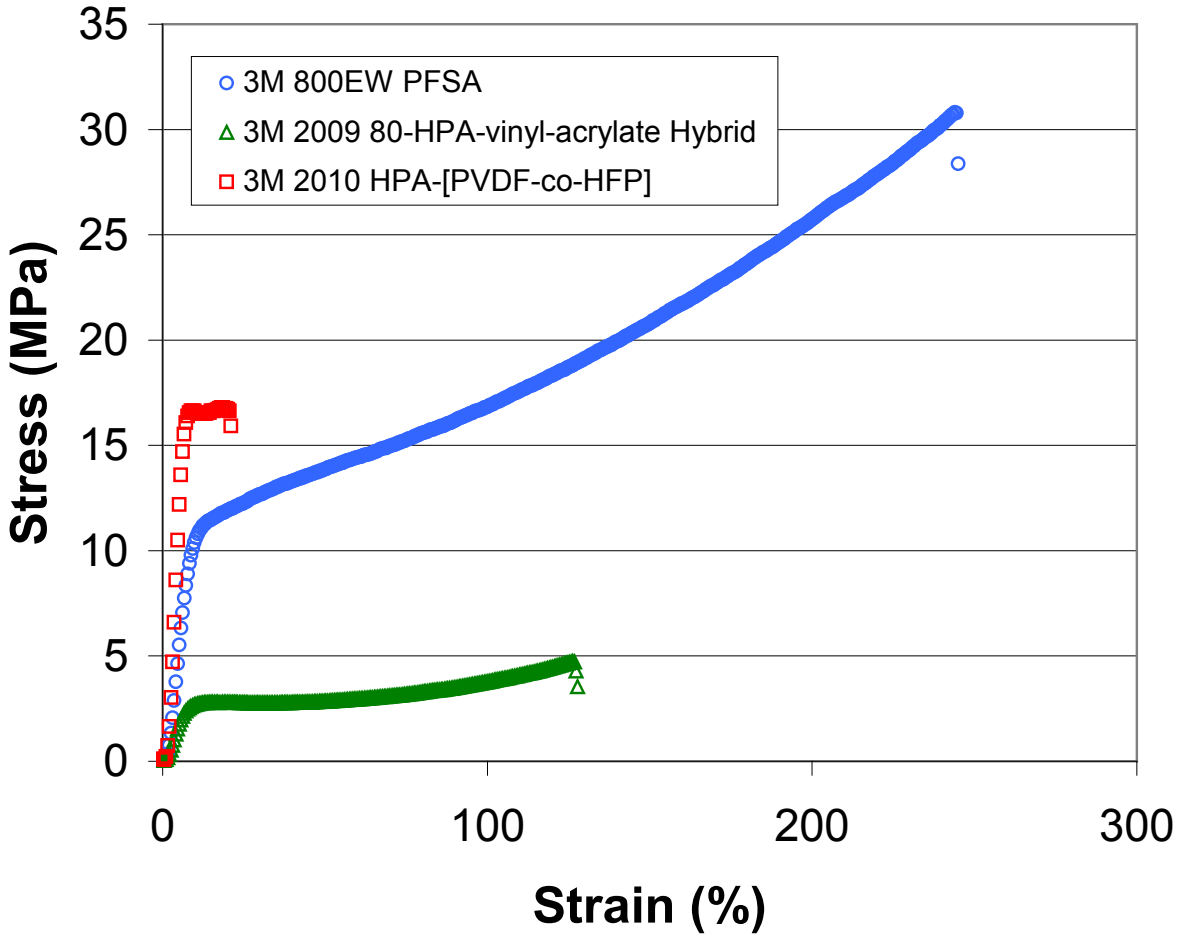

- Functionalized Polymer gives stronger film could be tailored by Dyneon chemistry

Manufacturing Feasibility Assessment

(01/07/2011)

Selected high-level comments:

- "This is a complex fine chemical synthesis."… "Fine chemical processing is a lot like this."
- "Chemically, there are no showstoppers."…"No chemistry here that scares me."
- "I wouldn't be too discouraged."
- "There are no exotic conditions…normal glassware."

Selected detailed comments:

- "Process optimization is needed to improve volume utilization."
- "% solids of each of these process steps will have a big impact on your reactor volume efficiency."
- "A lot of dissolving and drying" … "Can you avoid drying to a solid every time?"…"Can you do any steps neat?"
- "Can you do solvent exchanges?"…"keep it soluble?"
- "Can you use a different PVDF-HFP?…some may be easier than others…different molecular weight?"
- "To use less solvent, could you carry some impurities along, and then clean up just once, at the end?"

If one were to pursue this material commercially at 3M, next steps:

- Initiate "New Materials Introduction" program within MRD.
- Review for entry into MRD lab.
- Carry out focused work against detailed comments above.

Overall Conclusions:

- The HPA-modified PVDF-HFP preparation appears likely to be feasible in manufacturing.
- Any additional development work on this type of material should include objectives related to solvent usage and process simplicity, as suggested above.

18

Collaborations

- Prime: Colorado School of Mines – STEM University
- Sub: 3M Corporate Material Research Laboratory
- Other Collaborators: the following have agreed to test membranes ex-situ or as MEAs from promising films.
  - 3M Fuel Cell Components Group
  - FSEC
  - GM (has offered to test promising materials)
  - Nissan Technical Center, North America (has offered to test promising materials)

Proposed Future Work

- Project ended March 31st 2011, 6 month NCE granted to finish NMR characterization of best films as CSM NMR facility was down for 24 months, completion and final report before 2011 Q3.
- Films tested for oxidative stability 2011 Q2

Summary

- Consistently High Proton Conductivity in Robust films
- 2 New Film Chemistries optimized
  - High Oxidative stability
  - Excellent Mechanical properties

	DOE target 2010	FY10	FY10
H^+ conductivity At 20ºC	70 mS/cm	50 mS/cm 50%RH, 50ºC	Matched with practical chemistries
H^+ conductivity at 120ºC	100 mS/cm	>100 mS/cm <50%RH	Conductivities low in new polymers, but ASR targets in reach

Technical Back-Up Slides

SAXS Parameters for PolyPOM 75 and 85v, 80°C

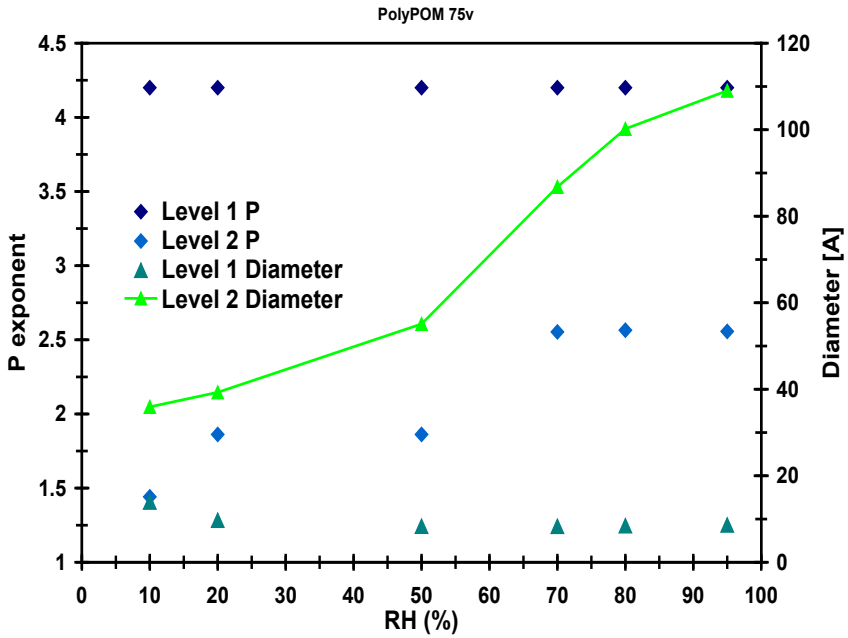

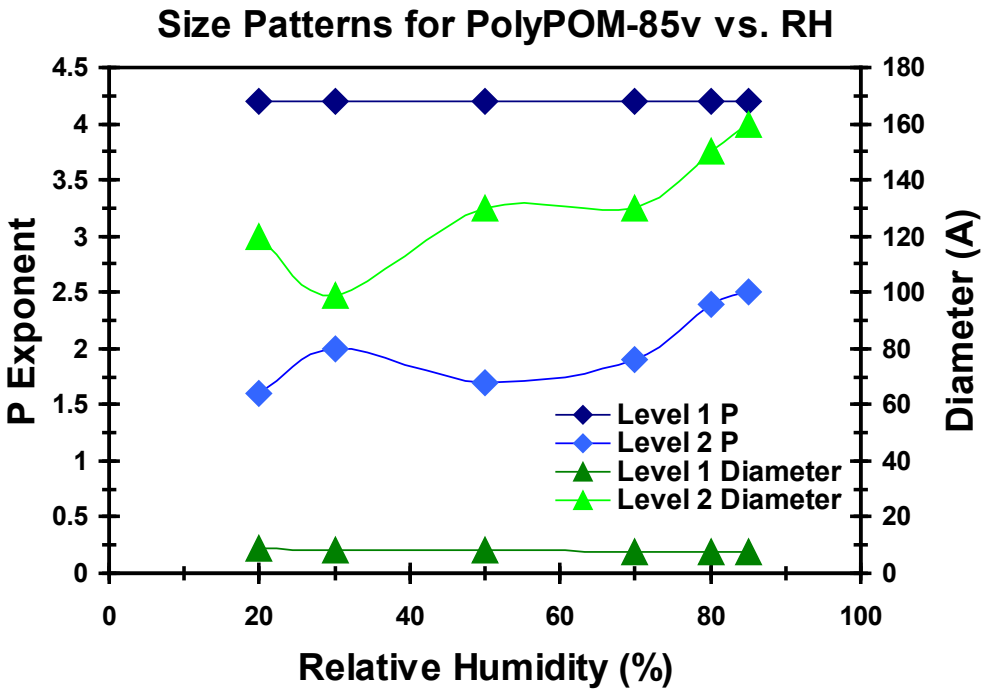

- Higher inorganic loading increases RH range over which swelling is minimized.

Water Vapor Sorption Profile of a PolyPOM-85v Membrane at 60 °C

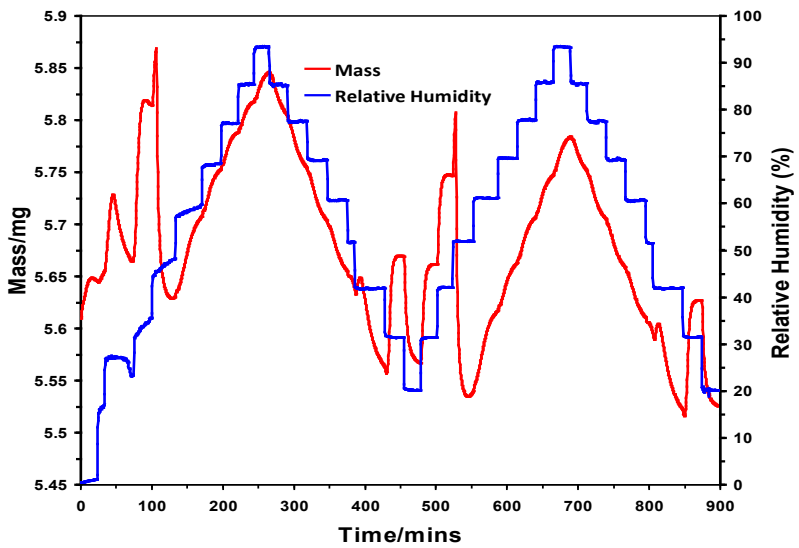

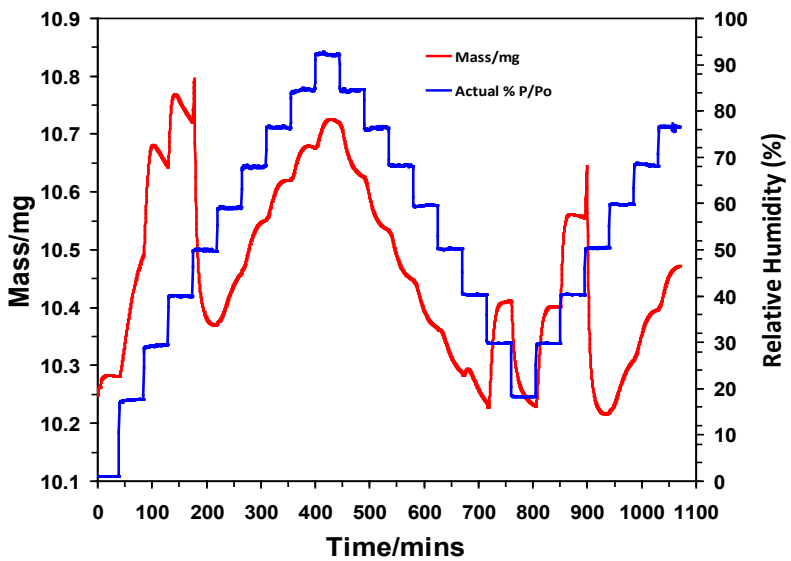

Fuel Cell Testing, PolyPOMs

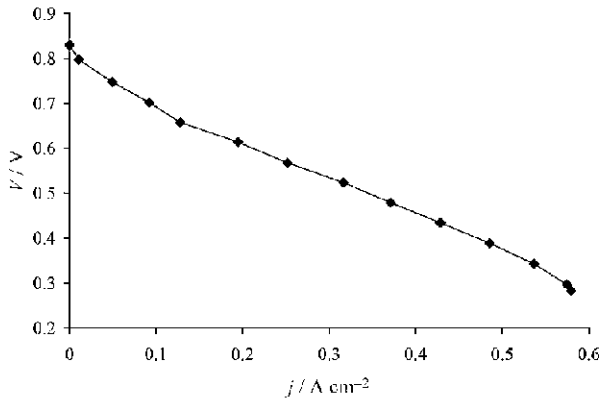

Figure 4. Polarization curve for the maximum performance of a 50 cm^2 MEA constructed from a 150 nm thick P(SW1175v-co-BA-co-HDDA) film. H_2/air = 800:1800 sccm, 70 8C, 75 % RH, ambient outlet pressure. Full details of MEA construction and testing were described previously.[12]

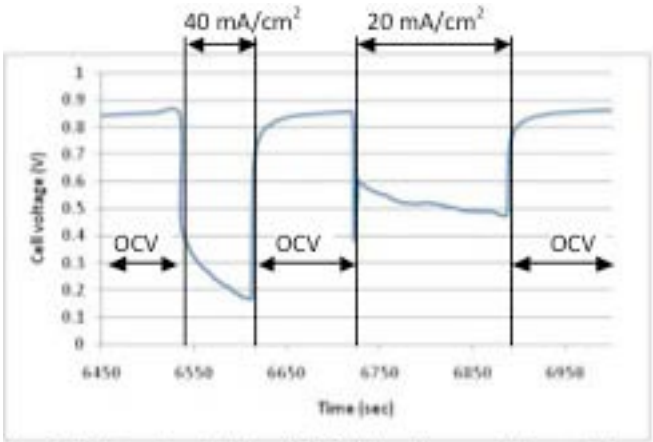

Figure 1. Voltage transients for C5 CCM during the second attempt at drawing current. Conditions: H2/air, 80 °C/100% RH

3M -2009

FSEC -2011