

II.A.1 Low-Cost Hydrogen Distributed Production System Development

Franklin D. Lomax

H₂Gen Innovations, Inc.

4740 Eisenhower Avenue

Alexandria, VA 22304

Phone: (703) 778-3121; Fax: (703) 212-4898

E-mail: Lomax@h2gen.com

DOE Technology Development Manager:

Sara Dillich

Phone: (202) 586-7925; Fax: (202) 586-2373

E-mail: Sara.Dillich@ee.doe.gov

DOE Project Officer: Jill Sims

Phone: (303) 275-4961; Fax: (303) 275-4788

E-mail: Jill.Sims@go.doe.gov

Contract Number: DE-FG36-05GO15026

Subcontractor:

Süd Chemie, Inc., Louisville, KY

Start Date: July 1, 2005

Projected End Date: September 30, 2008

Objectives

- Design, build and test a steam methane reformer (SMR) system that will achieve the DOE cost and efficiency targets for 2015.
- Demonstrate the efficacy of a low-cost renewable hydrogen generation system based on distributed production of hydrogen from ethanol.

Technical Barriers

This project addresses the following technical barriers from the Production section of the Hydrogen, Fuel Cells and Infrastructure Technologies Program Multi-Year Research, Development and Demonstration Plan:

- (A) Fuel Processor Capital Costs
- (B) Reformer Manufacturing
- (C) Operation and Maintenance (O&M)
- (D) Feedstock Issues
- (E) Carbon Dioxide Emissions
- (F) Control and Safety

Technical Targets

- Total production system (SMR + pressure swing adsorption [PSA]) efficiency (lower heating value

[LHV] of fuel cell-grade hydrogen out)/(LHV of fuel in + electricity in): 70%

- Distributed hydrogen cost from natural gas: \$2.50/kg (production capital cost component: \$0.47/kg)
- Distributed hydrogen from ethanol cost: \$3.60/kg (production capital cost component: \$0.50/kg)

Accomplishments

- Collected over 42,000 hours of field test data (multiple units) on the 113 kg/day commercial H₂Gen SMR systems to verify system efficiency and reliability, exceeding the original goal of over 2,500 hours field test experience.
- Based on this extensive test experience at 113 kg/day scale, H₂Gen redesigned the reactor and flow sheet for a 565 kg/hr platform, including:
 - Low pressure drop burner
 - Compact, low stress steam generator
 - Linear combustion air supply system
- Designed the SMR plus PSA skid to industry standards including B31-3, VIII-1, API 618, National Fire Protection Association 70A, 497, 496 and Canadian Standards Association 5.99.
- Completed fabrication of the first 565 kg/day reformer and PSA system and began field testing in the fourth quarter of 2007.
- Set-up and ran the HGM-10,000 under automatic control for a total of 3,963 hours in the field in the first quarter of 2008, exceeding our goal of 2,500 hours of field testing.
- Completed the ethanol catalyst screening tests and successfully demonstrated reforming of neat ethanol in micro-reactor tests.
- Started the long-term (>1,000 hours) catalyst life testing with ethanol, and prepared for testing of ethanol reforming with gasoline additives found in E-95 used in commercial ethanol fuel transport.



Introduction

Achieving the DOE cost targets will require improved efficiency and also larger hydrogen capacity compared to the current HGM-2000 system (2,000 scfh or 113 kg/day capacity). We are also reducing catalyst cost while improving SMR, shift and PSA performance and increasing feedstock diversity.

Approach

To meet the DOE cost targets, the HGM system must be improved both in terms of higher efficiency (to cut down the cost of natural gas [NG]) and also in reduced capital cost. Furthermore, the capacity of the HGM must be increased, both to cut the cost of hydrogen (since many HGM components will scale less than linearly with increased hydrogen capacity) as well as to meet the demands of a full service fueling station. We have therefore designed, built and field-tested an HGM-10,000 with five times the capacity of our current system.

While we expect that the HGM-10,000 (565 kg/day) technology scaled to 1,500 kg/day will meet or exceed the DOE 2015 cost targets for the hydrogen production and gas cleanup portion of a fueling station, it will still depend on natural gas. To reach the DOE renewable hydrogen goal, we, in collaboration with our catalyst partner, Süd Chemie, also began evaluating the cost and efficiency of reforming ethanol at the local fueling station using the H₂Gen technology. We expect that hydrogen made from ethanol will be the least costly renewable hydrogen option for at least a decade or two.

Results

WGS Catalyst Development The water-gas shift (WGS) catalyst remains one of the highest cost items on the HGM-10000 unit. Süd-Chemie in cooperation with H₂Gen continued the development of improved and less expensive catalysts. Primarily modifications to the support materials and support preparation procedures were investigated. The new materials were tested by Süd-Chemie to compare the performance to the current WGS catalyst used in HGM-10000.

Pre-Reforming Catalyst Development Süd-Chemie and H₂Gen previously have identified pre-reforming catalyst formulation and operating procedures that perform well with liquefied petroleum gas and ethanol fuels. The cost of this catalyst remains higher than the cost of a standard NG pre-reforming catalyst currently used in HGM-10000 units. Süd-Chemie continues development work on the pre-reforming catalyst formulation with the main objective of reducing the cost while preserving the performance characteristics. The development is primarily focused on material substitution in the support material preparation. As the new procedures for the catalyst manufacturing are developed H₂Gen will conduct testing of the catalyst activity and stability to compare it to the current pre-reforming catalyst.

HGM-10,000 Field Testing The first HGM-10,000 system was fabricated and shipped to the field in the third quarter 2007. The system was installed and successfully started for the first time on October 10, 2007. The start-up and shut-down sequences were

refined over several runs and are now fully automated; no operator intervention is required to start up the HGM-10000 from a cold condition through burner firing, reactor warm-up, PSA automatic operation and ramping up hydrogen output. Hydrogen production occurs within 90 minutes of starting the machine.

Total accumulated field testing time was 3,963 hours by the first quarter of 2008, when the system was shut down and returned to H₂Gen for examination and refurbishment. As shown in Figure 1, the output flow reached 8,000 scfh. The higher heating value (HHV) efficiency reached approximately 75% after two mechanical upgrades to the system as shown in Figure 2. A new superheater was installed with 66% of the original heat transfer area to cut down excessively high reactor flue outlet temperatures. The second change was to install a larger secondary air blower with 50% more capacity, since the previous blower was limiting the ability to cool the reformer outlet gas to the WGS section. It should be noted that we were not able to measure the NG heating value at the remote test site, so these efficiency numbers could be higher. We assumed that the natural gas had a HHV of 1,036 BTU/scf, the average value measured at our Alexandria, Virginia plant for the purposes of these efficiency calculations.

Ethanol Testing A long-term aging test was placed in a reactor furnace to verify stable performance of the ethanol reforming catalysts. A sequence of reforming catalysts (pre-reforming/steam reforming/ultra-high temperature WGS/WGS) was used to simulate the complete reforming process. Reflux ethanol fuel (7.76% water content in pure ethanol) was used in the test.

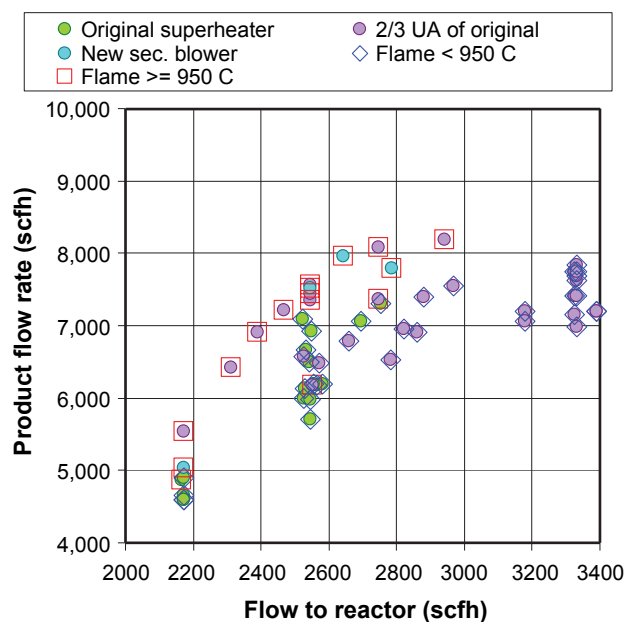


FIGURE 1. Hydrogen Production Rate as a Function of NG Flow to the Reformer

