

2005 DOE Hydrogen Program
Development of Sensors for Automotive
PEM-based Fuel Cells

DOE Agreement DE-FC04-02AL67616

Donna Ho - DOE

Tom Clark/Brian Knight

UTC FC/UTRC

May 26, 2005

[This presentation does not contain any proprietary or confidential information](#)

Project ID #
FC30

Timeline

- Start: April 2002
- End: September 2005
- 90 Percent complete

Budget

- Total project funding
 - DOE share: \$2.9 MM
 - Contractor share: \$720 M
- Funding received in FY04: \$1076 M
- Funding for FY05: \$540 M

Barriers

- Barriers addressed
 - Cost and Durability
 - Reliability
 - Size
 - Manufacturability

Partners

- UTC Fuel Cells/UTRC
- ATMI
- Illinois Institute of Technology (IIT)
- NexTech Materials

Objectives

- Develop suite of sensors for CO, H₂, O₂, H₂S, flow, temperature, pressure, and relative humidity that meets performance requirements
- Demonstration of new H₂ safety sensor
- Develop **new measurement principles** to meet sensitivity requirements
- Improve reliability in harsh fuel cell system environments
- Path to low cost (<\$20 / sensor) at 200k qty

Approach

- **Sensor development program utilizes a team approach**
 - UTRC for program coordination and physical and chemical sensor evaluation
 - Illinois Institute of Technology (IIT) for chemical sensor evaluation
 - Advanced Technical Materials (ATMI) for MEMS sensor development
 - NexTech Materials for electrochemical and solid state sensor development

Team Member	T	ΔP	RH	flow	O ₂	CO	H ₂	SO ₂	H ₂ S	NH ₃	Technological Expertise / Responsibility
UTC FC	X	X	X	X	X	X	X	X	X		Testing on S300 Breadboard
UTRC	X	X	X	X	X	X	X	X	X		Testing in reformat simulator
ATMI							X	X	X		Develop Using MEMS Silicon Microhotplate
IIT	X		X		X	X	X	X	X		Testing in Benchmark Facility
NexTech						X		X	X		Develop Using Solid State Electrochemical

Summary of IIT Accomplishments



• **Market Survey**

- Initial survey and report (completed)
- updates and additions (on-going, but essentially completed)

• **Benchmark Sensors**

- First round testing (completed)
- Performance Reports (completed)
(safety application, concentration, interference, analytic performance)
- Second round testing (on-going)
 - safety and feed stock
 - Humidity effects on new sensors being tested
 - Effect of H₂S and CO on ATMI H₂ sensor being tested
- broader concentration range, temperature range, pressure dependence, interference (CO and H₂S), moisture effects on performance

IIT Benchmark Testing of Viable Sensor Technologies

- IIT evaluated over 70 H₂ sensing technologies
- Tiered approach used to evaluate sensor technologies
 - Gas concentration, operating temperature, water vapor pressure
 - Effect of pressure, other background gases
 - Long-term testing
- Hydrogen Sensors (Reformer)
 - H2 Scan, Makel Engineering, ATMI, KSC NASA
- Hydrogen Sensors (Safety Application)
 - H2 Scan, Applied Sensors, Makel Engineering, ATMI, Figaro, Transducer Technology, Inc., Argus Group, Nemoto Environmental Technology, Applied Nanotech
- Carbon Monoxide Sensor
 - NexTech Materials

(Sensors currently available are listed in blue)

Summary of ATMI Accomplishments

- **LEL**
 - Developed and tested rare earth hydride based MEMS sensors
 - Demonstrated performance against program targets
 - Delivered alpha prototypes for IIT& UTRC for evaluation
- **Stack**
 - Developed and tested Pd, Ir, and Rh quad-layer sensors
 - Demonstrated performance against targets
 - Delivered prototypes to IIT for evaluation
- **H₂S**
 - Developed noble metal thin film sensors
 - Demonstrated detection of 10 ppb H₂S

Summary of NexTech Accomplishments

▪ Sulfur Sensors

- Delivered alpha prototype to UTRC for evaluation
 - Obtained 400 hours of lifetime data
- Exhibited sensitivity at the **100 ppb** level
- Cross-sensitivity to CO tested; not an issue
- Smaller substrate with integrated heaters are being tested for beta prototype calibration
- Automated stand for long-term testing has been constructed
- Established sensitivity of H₂S sensor in methane background

▪ Carbon Monoxide Sensors

- Demonstrated sensitivity at the **5ppm** level
- Addressing baseline drift issues
- Delivered alpha-prototypes to IIT and UTC
- Testing and verification of Los Alamos prototypes have begun

Sensor Evaluation Status


- Physical Sensors
 - Sensors for T, P, DP, Relative Humidity (RH), and Flow evaluated in PEM fuel cell simulator in near-condensing flow regime
 - State-of-the-art physical sensors meeting program needs selected
- Chemical Sensors
 - First round of sensor testing and qualification completed
 - Multiple H₂ sensors evaluated for sensitivity, selectivity, and performance
 - α prototype CO sensor received from NexTech Materials
 - Evaluating next generation of sensors from ATMI and NexTech to address cross-sensitivity and drift issues

Physical Sensor Evaluation Status

Sensor	Operating Principle	Positive Attributes	Comments
Temperature	Thermistor	0 to 250 °C, -40 to 750 °C	Response time slow but within program needs
Pressure	Strain gauge (Druck)	Silicon based IC compatible fabrication.	May be mass produced and miniaturized
RH	Polymer capacitive (Panametrics)	0 to 180 °C, 0-100% RH	Recovery from condensing flow regime
Flow	Thermal dissipation	Most cost effective	Response fluctuation due to condensation



ATMI Sensors - Goals and Approach

- **Project Goals**
 - Demonstrate the capabilities of micro machined H₂ and H₂S sensors
 - Develop an understanding of their performance
 - Critically evaluate the utility and viability of this technology for life safety and process monitoring
- **Approach**
 - MEMS based platform coupled with multilayer sensing films
 - Thermally controlled chemi-resistive transduction

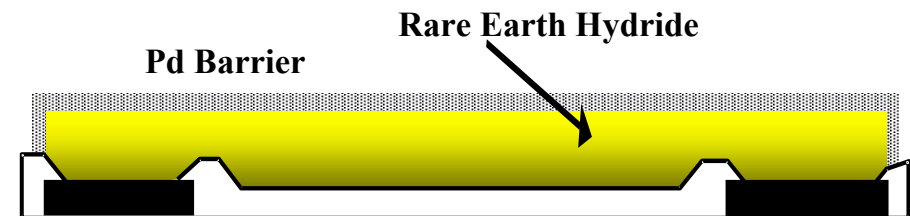


ATMI LEL Sensors

- **Hydrogen in ambient air – safety sensor**
 - 0.1 – 10% H₂
 - -30 to 80 °C
 - Response time < 1 sec
- **Pd/Y bi-layer**
 - $T_{90} < 2$ sec
 - 8 to 10% per month baseline drift rate
- **Pd quad-layer**
 - 2.68% per month baseline drift rate

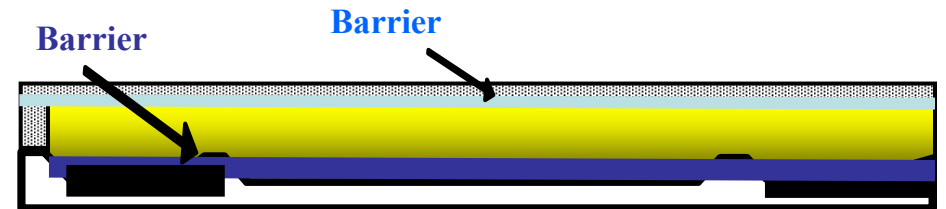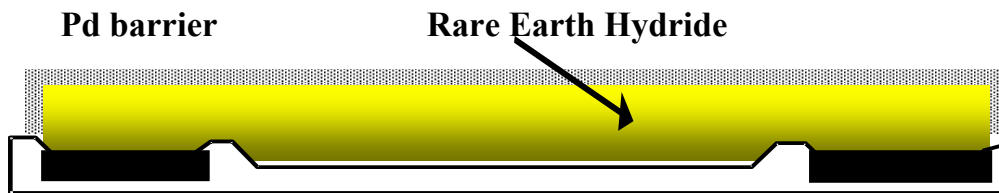




LEL Sensors – Pd Quad-layer

- Pd quad-layer
 - Air, 80°C
 - $T_{90} < 2$ sec
- Sensor in commercialization stage

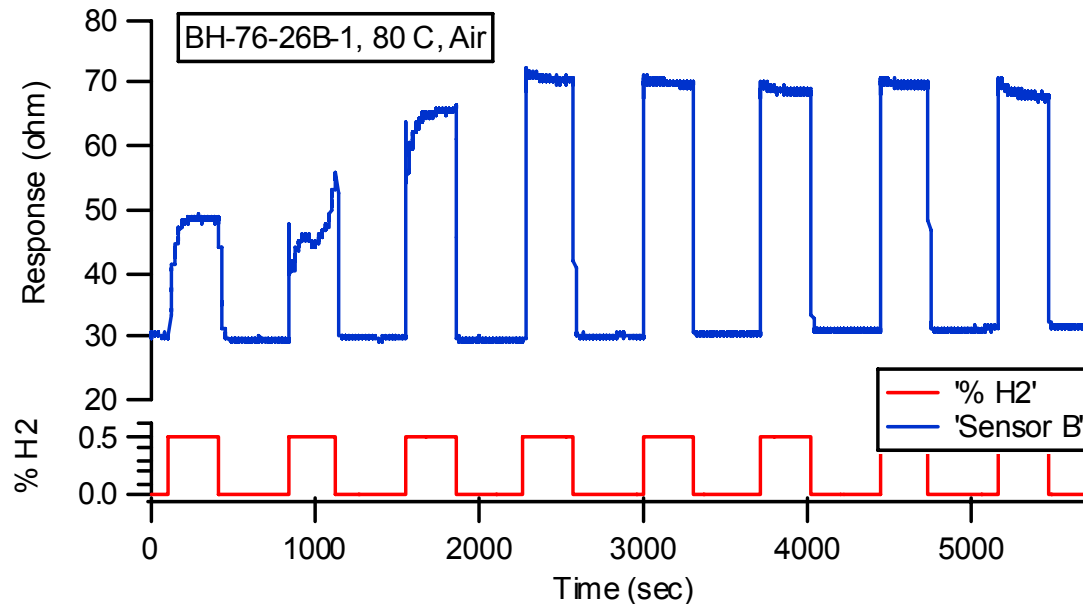



Pd Quad Layer – LEL Applications As Tested at IIT

- Quick response
 - $T_{90} \sim 2$ sec
- Good LDL
- 2.5% H_2 linearity
- Insensitive to 100 ppm CO
- Good Hysteresis

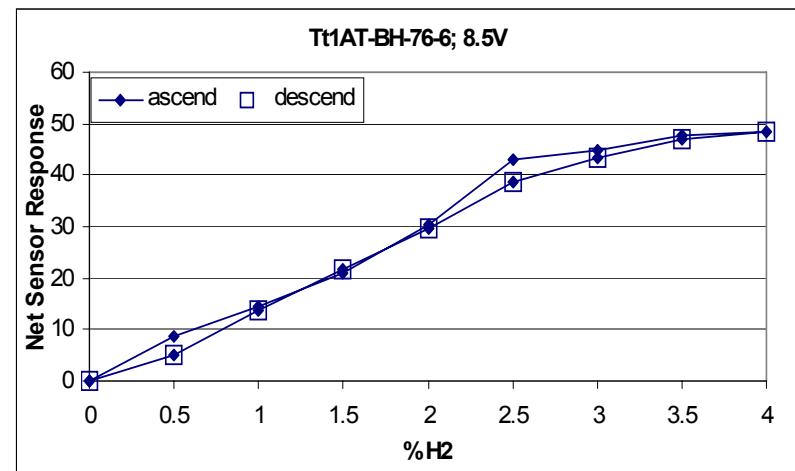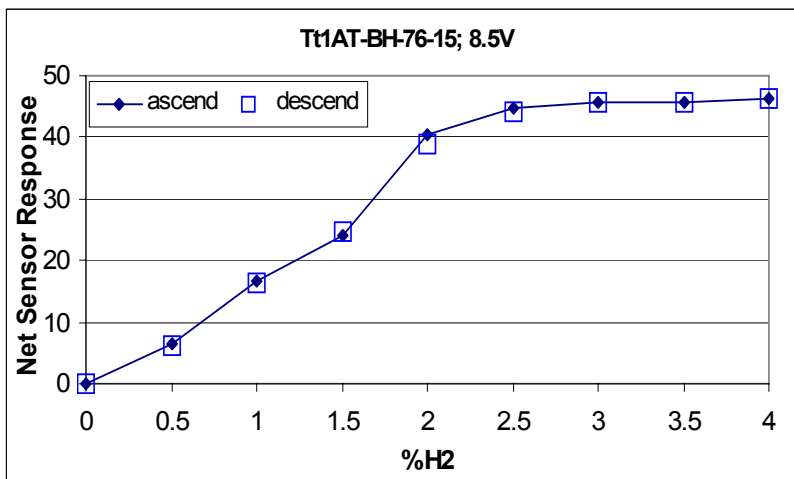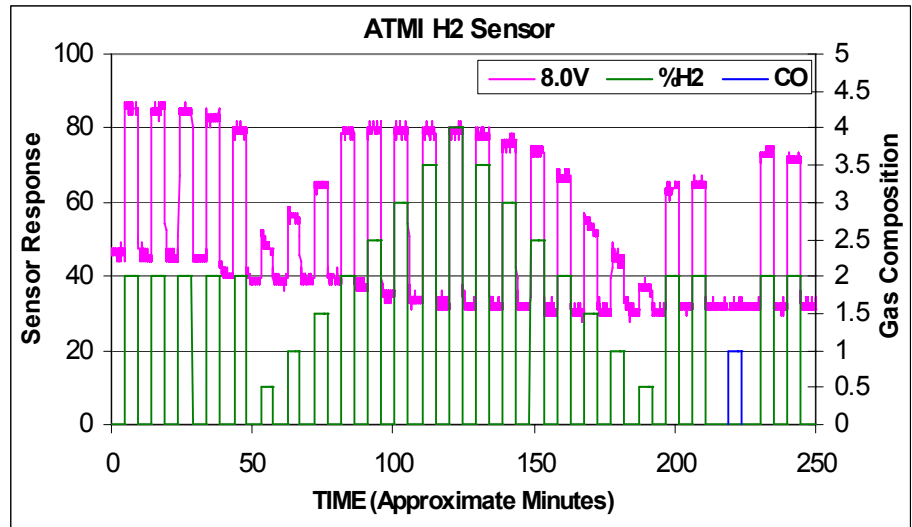



Stack Sensor -Thin Rh Quad-layer Dynamic Range

- Dynamic ranges
 - 160°C
 - 2.5 to 40% H₂
 - Linear responses
 - 2.5 to 20% H₂
 - 20 to 40% H₂
 - 2.4 to 40% H₂ in N₂

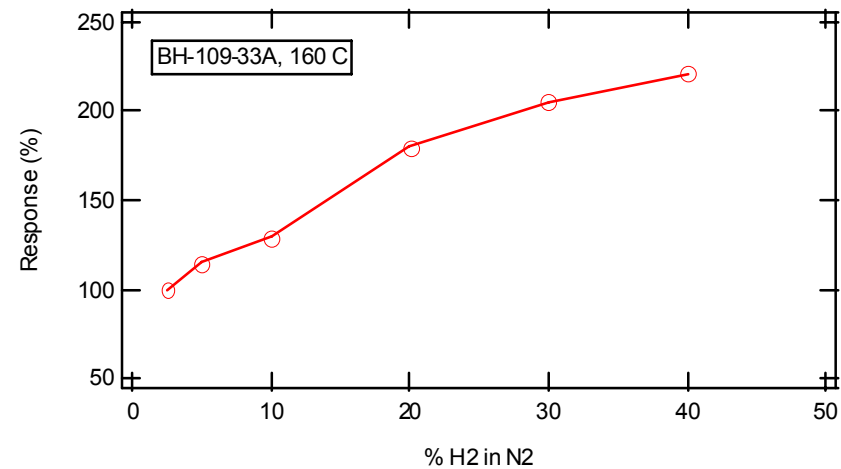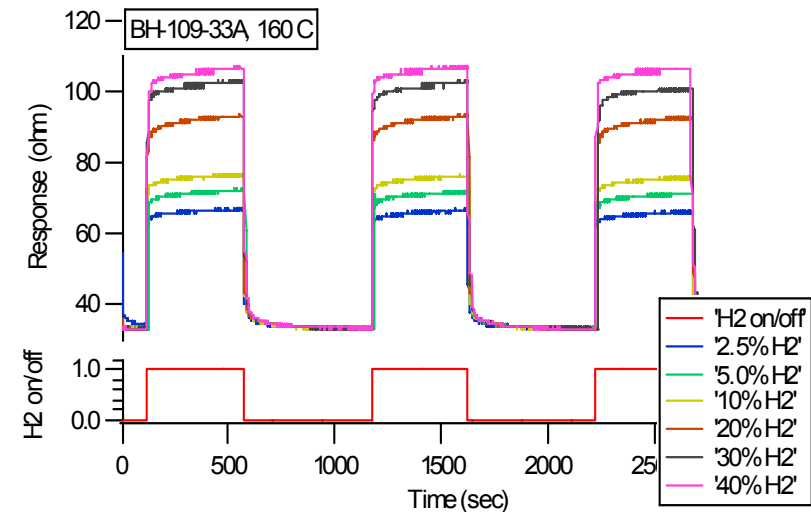


Stack Sensor – Thin Rh Quad-layer Long Term Performance

- 4% H₂/N₂
- 160 °C, 16 days
- Negligible drift
- Minor degradation

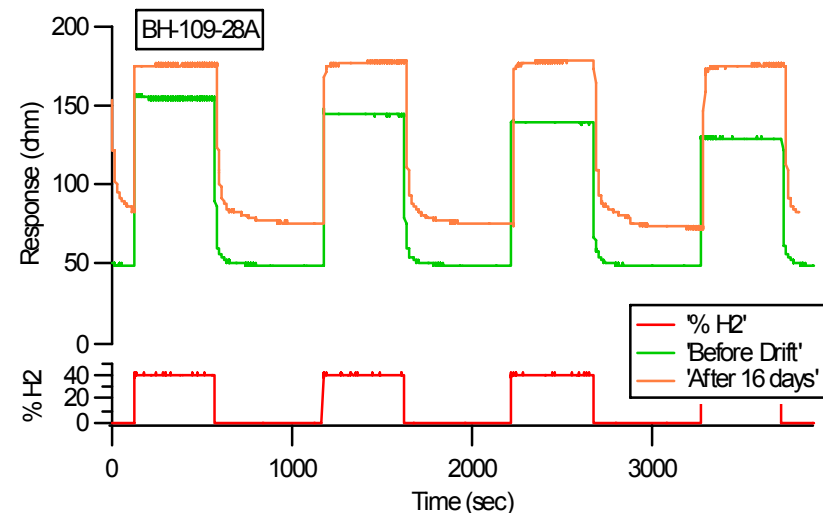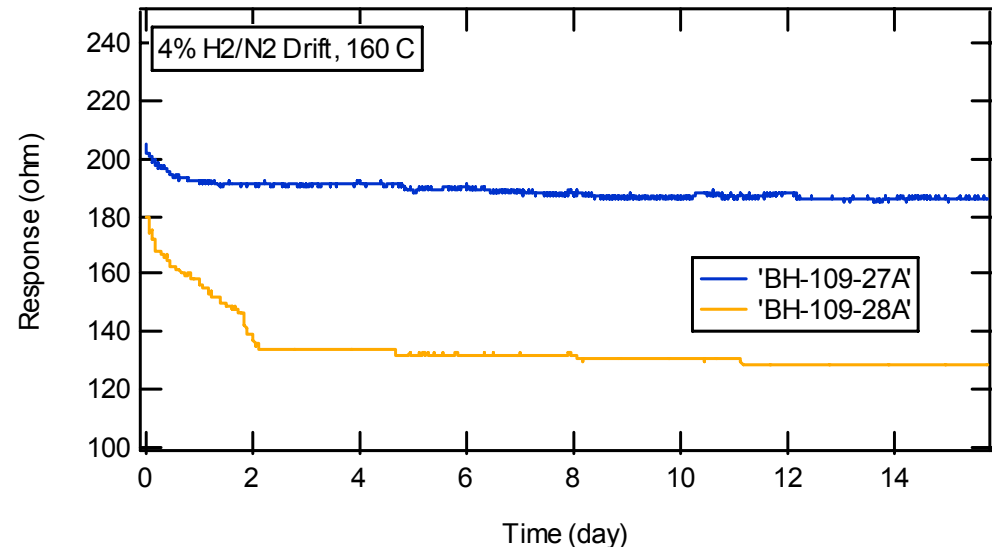



ATMI H₂S Sensor Development

- Targets
 - Temp: 400°C
 - Range: 0.05 ppm - 0.5 ppm
- Approach
 - Ultra thin (< 50nm) metal film deposition on micro hotplate platform
 - 25 nm and thinner are discontinuous
 - 50 nm films continuous with poor adhesion
 - Additional interlayer improves adhesion

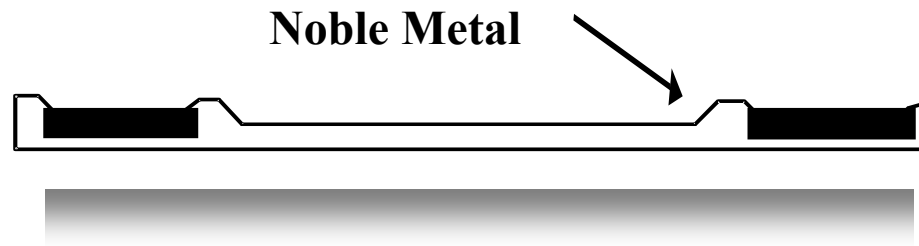

Rh Sensor Performance

- 290°C operation
- 4% H₂/N₂ background
- **10 ppb H₂S detection**
- 15.5 min on
- 15.5 min off
- Logarithmic response
- Delta-R linear with log of H₂S concentration between 10 – 1000 ppb

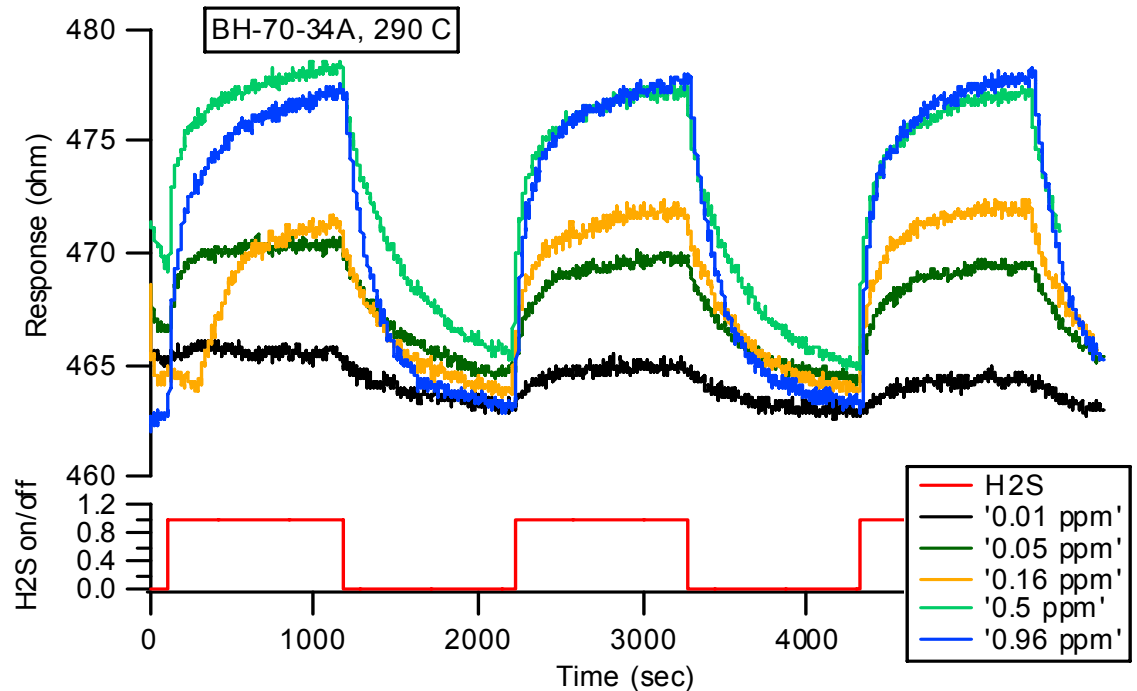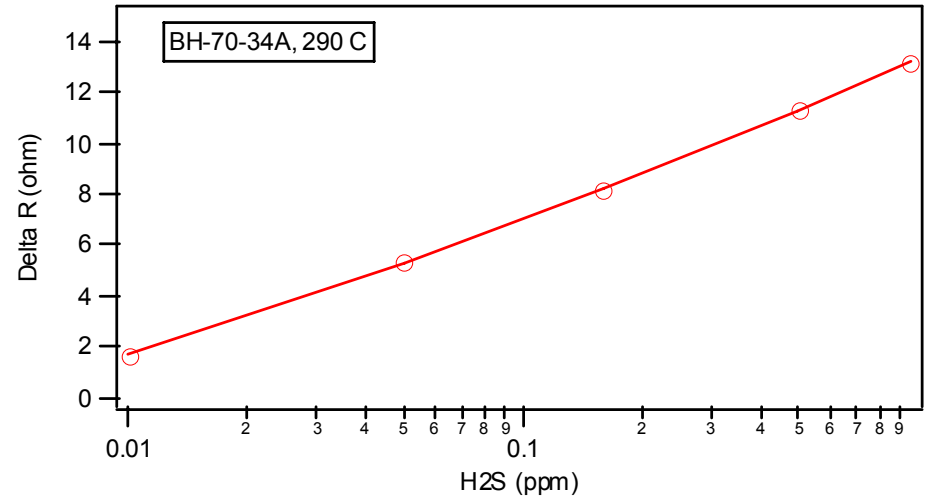

Summary of NexTech Accomplishments


▪ Sulfur Sensors

- Delivered alpha prototype to UTRC for evaluation
 - Obtained 400 hours of lifetime data
- Exhibited sensitivity at the **100 ppb** level
- Cross-sensitivity to CO tested; not an issue
- Smaller substrate with integrated heaters are being tested for beta prototype calibration
- Automated stand for long-term testing has been constructed
- Established sensitivity of H₂S sensor in methane background

▪ Carbon Monoxide Sensors


- Demonstrated sensitivity at the **5ppm** level
- Addressing baseline drift issues
- Delivered alpha-prototypes to IIT and UTC
- Testing and verification of Los Alamos prototypes have begun

NexTech Sensor Platforms

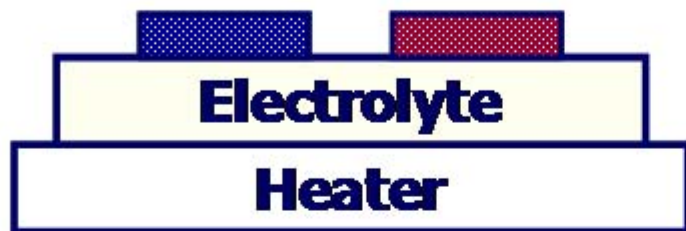


Mixed Potential Mode

Carbon Monoxide

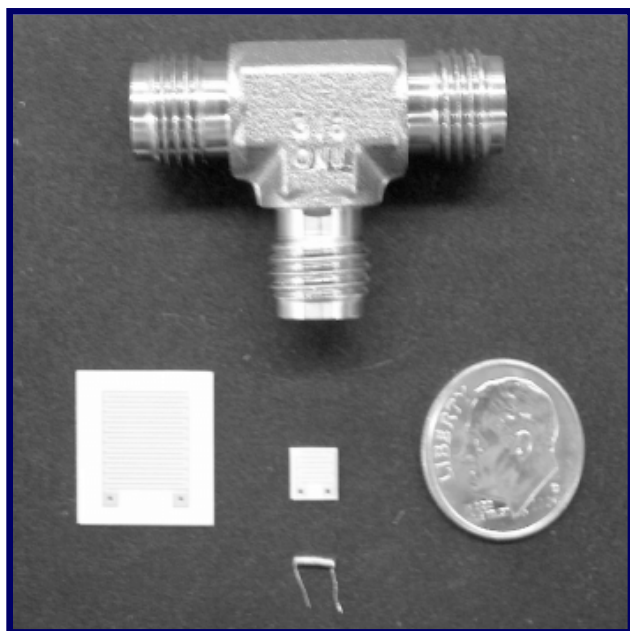


Chemi-Resistor


**Carbon Monoxide
Hydrogen Sulfide**

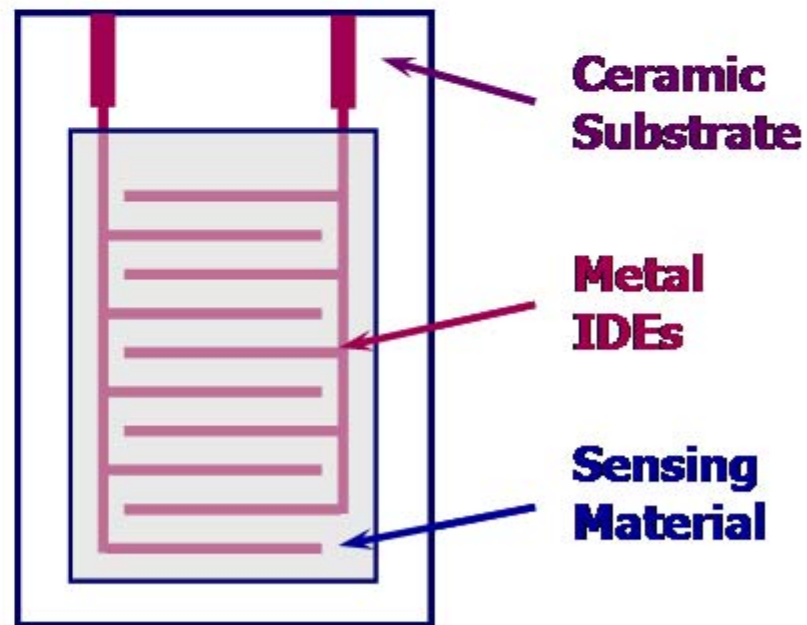


Resistive-Mode H₂S Sensors

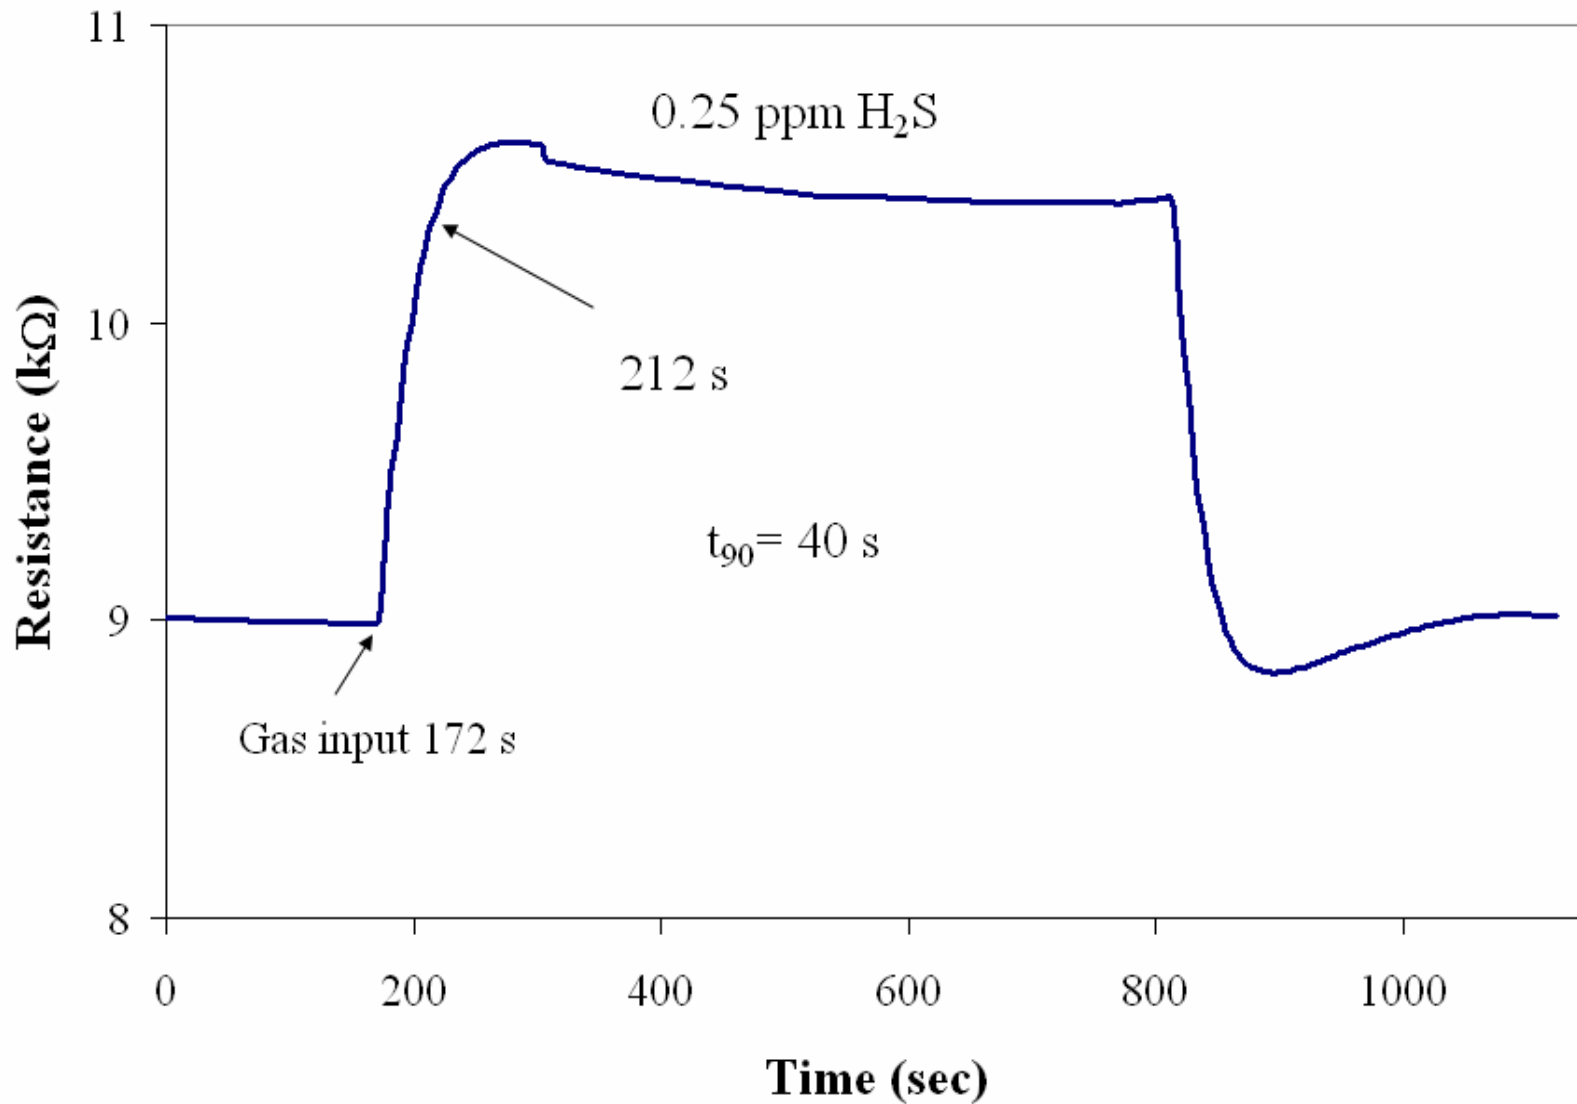



H₂S Sensor: Long Term Testing

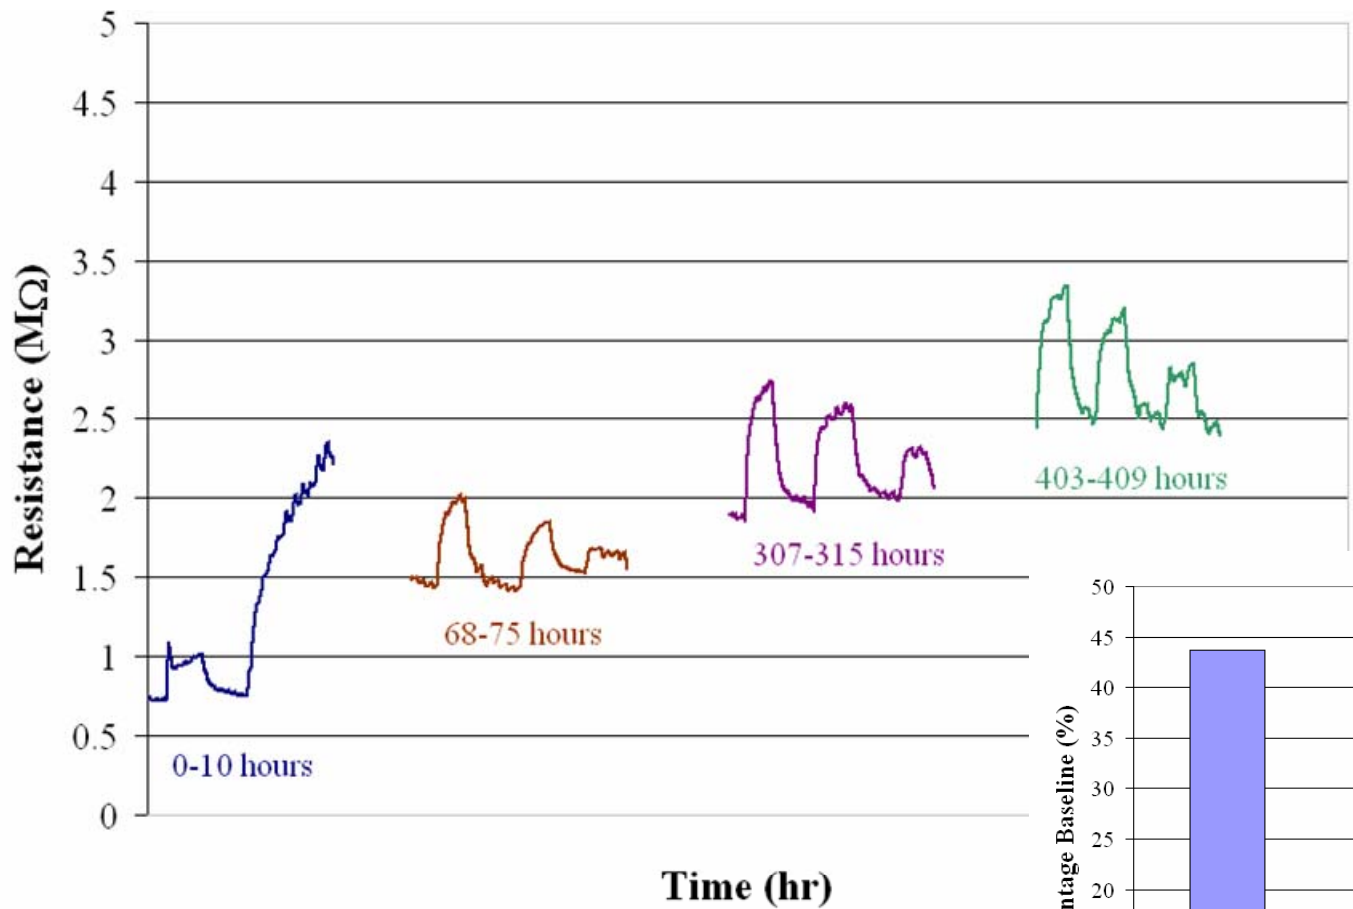


Baseline drifting, but sensitivity is constant relative to baseline

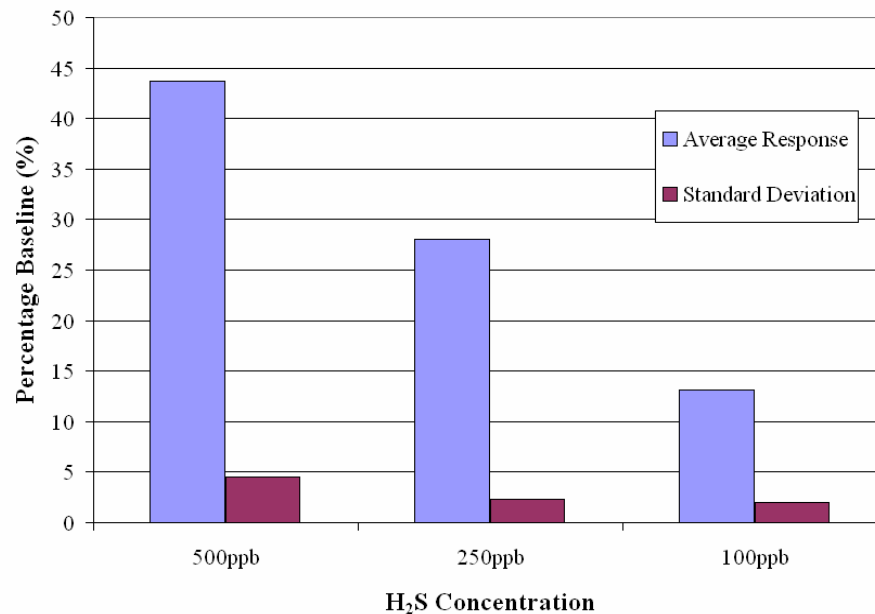

CO Sensor Response to Low Concentrations

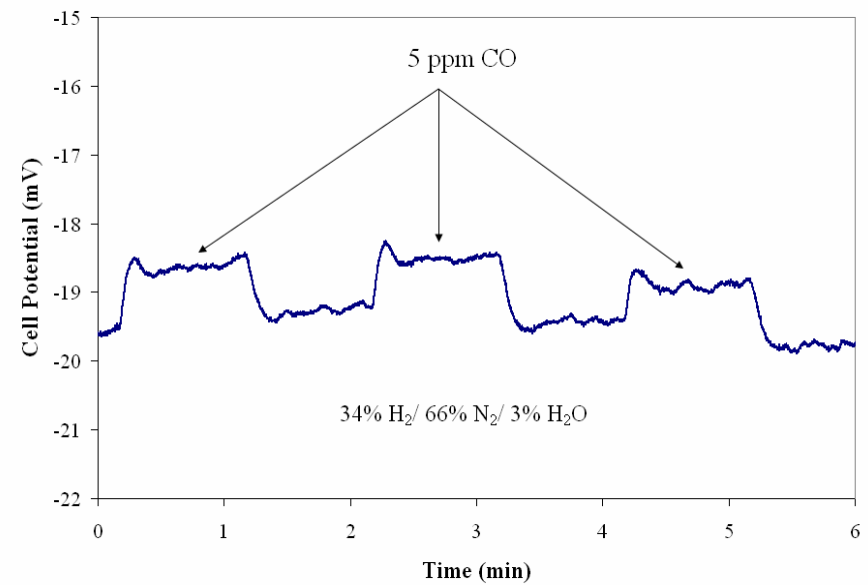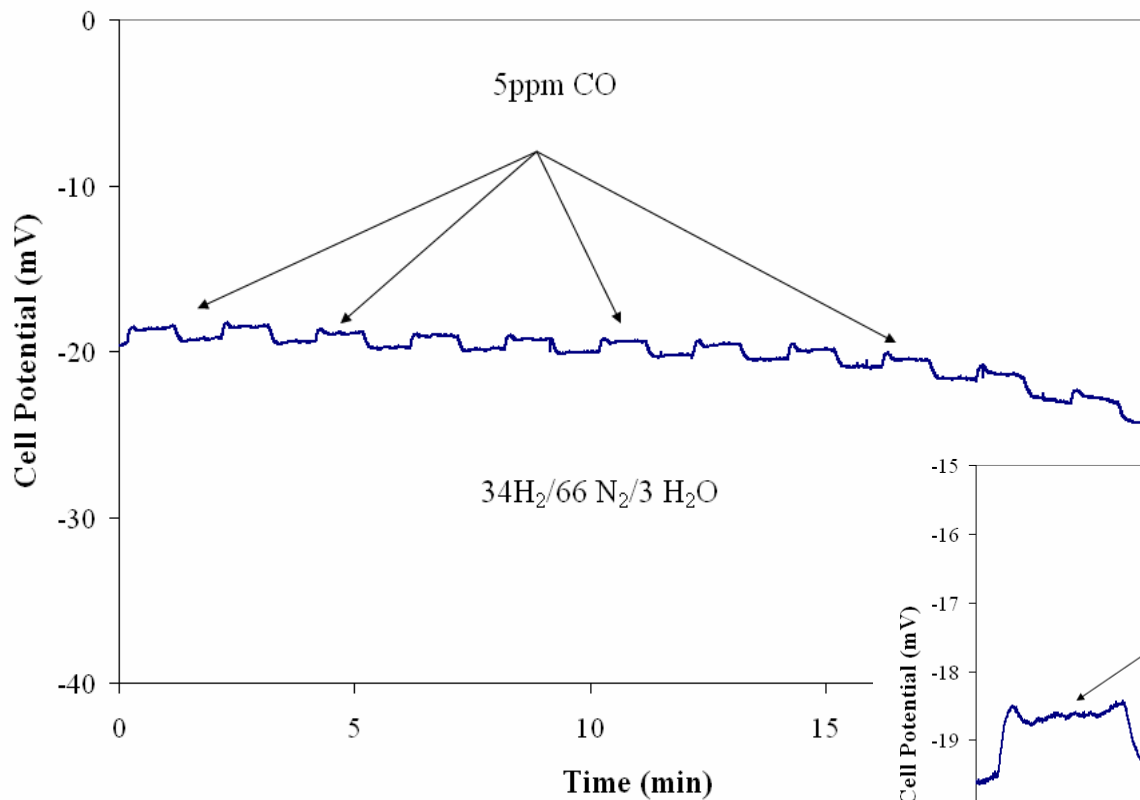

Long-Term CO Sensor Testing

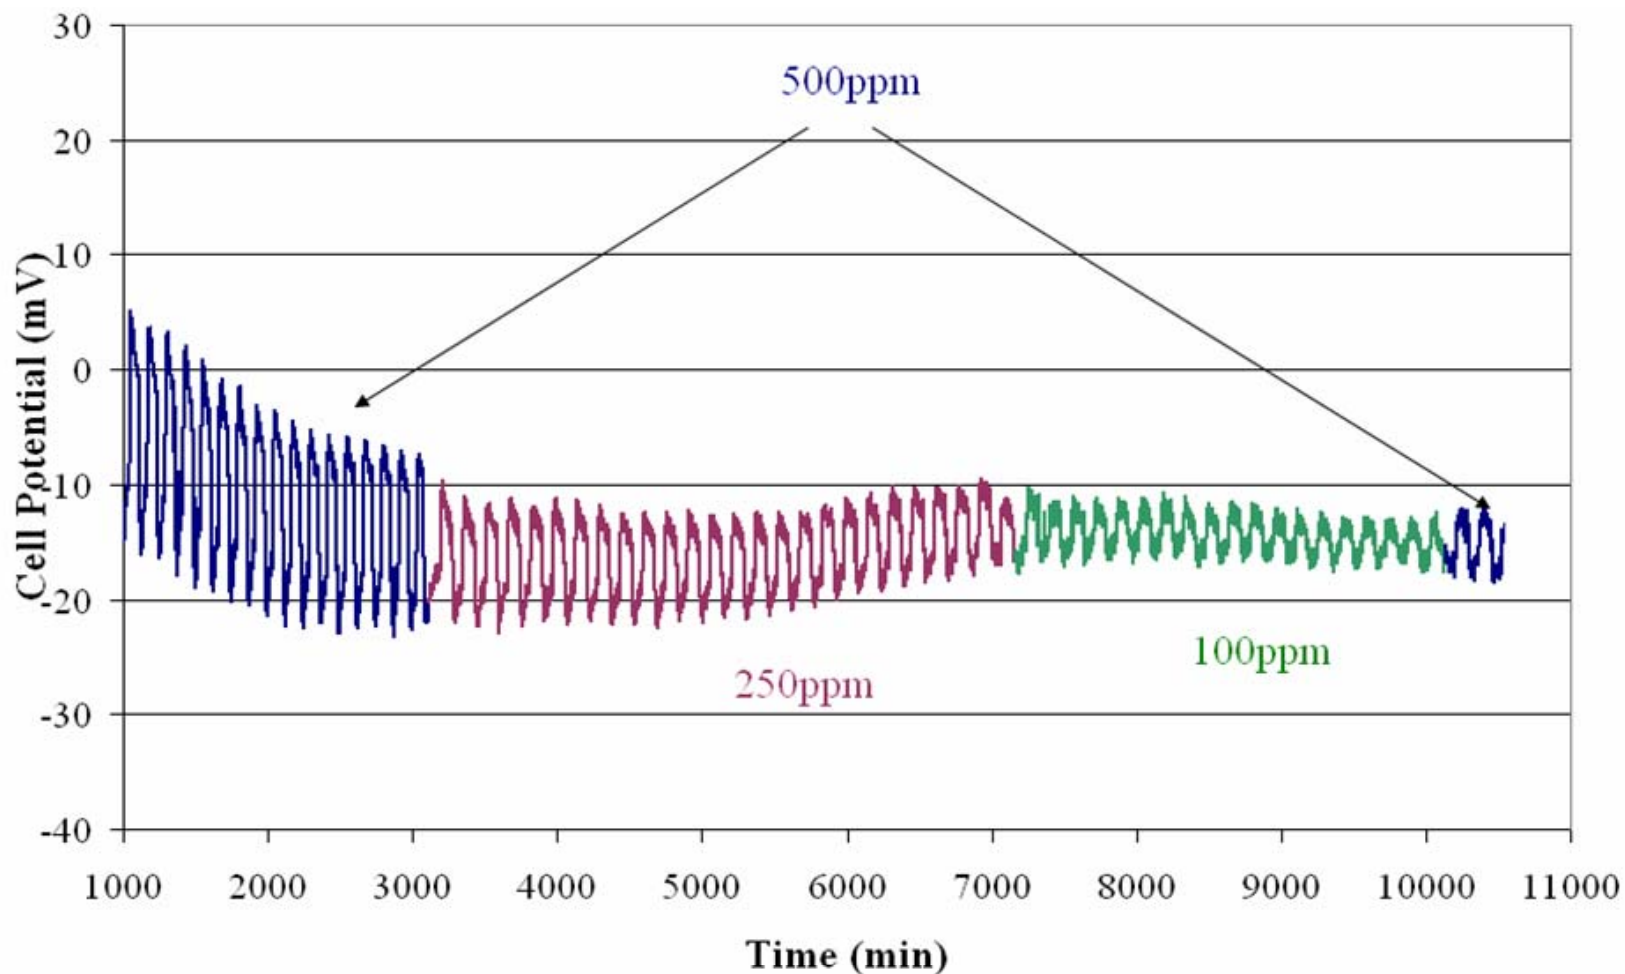


Low surface area electrodes minimize baseline drift, but possible loss of sensitivity to higher CO contents with cycling

Los Alamos Collaboration

- LANL Contact: Dr. Rangachary Mukundan
- Testing agreement in place
- Ongoing collaboration on MP sensors
- Verification of LANL sensor performance in progress
- Initial tests show sensitivity at 25 ppm CO in $N_2/H_2/17\text{vol}\% H_2O$
- Need to address challenges of humidifying Nafion membrane

H₂S Sensor Response in Methane

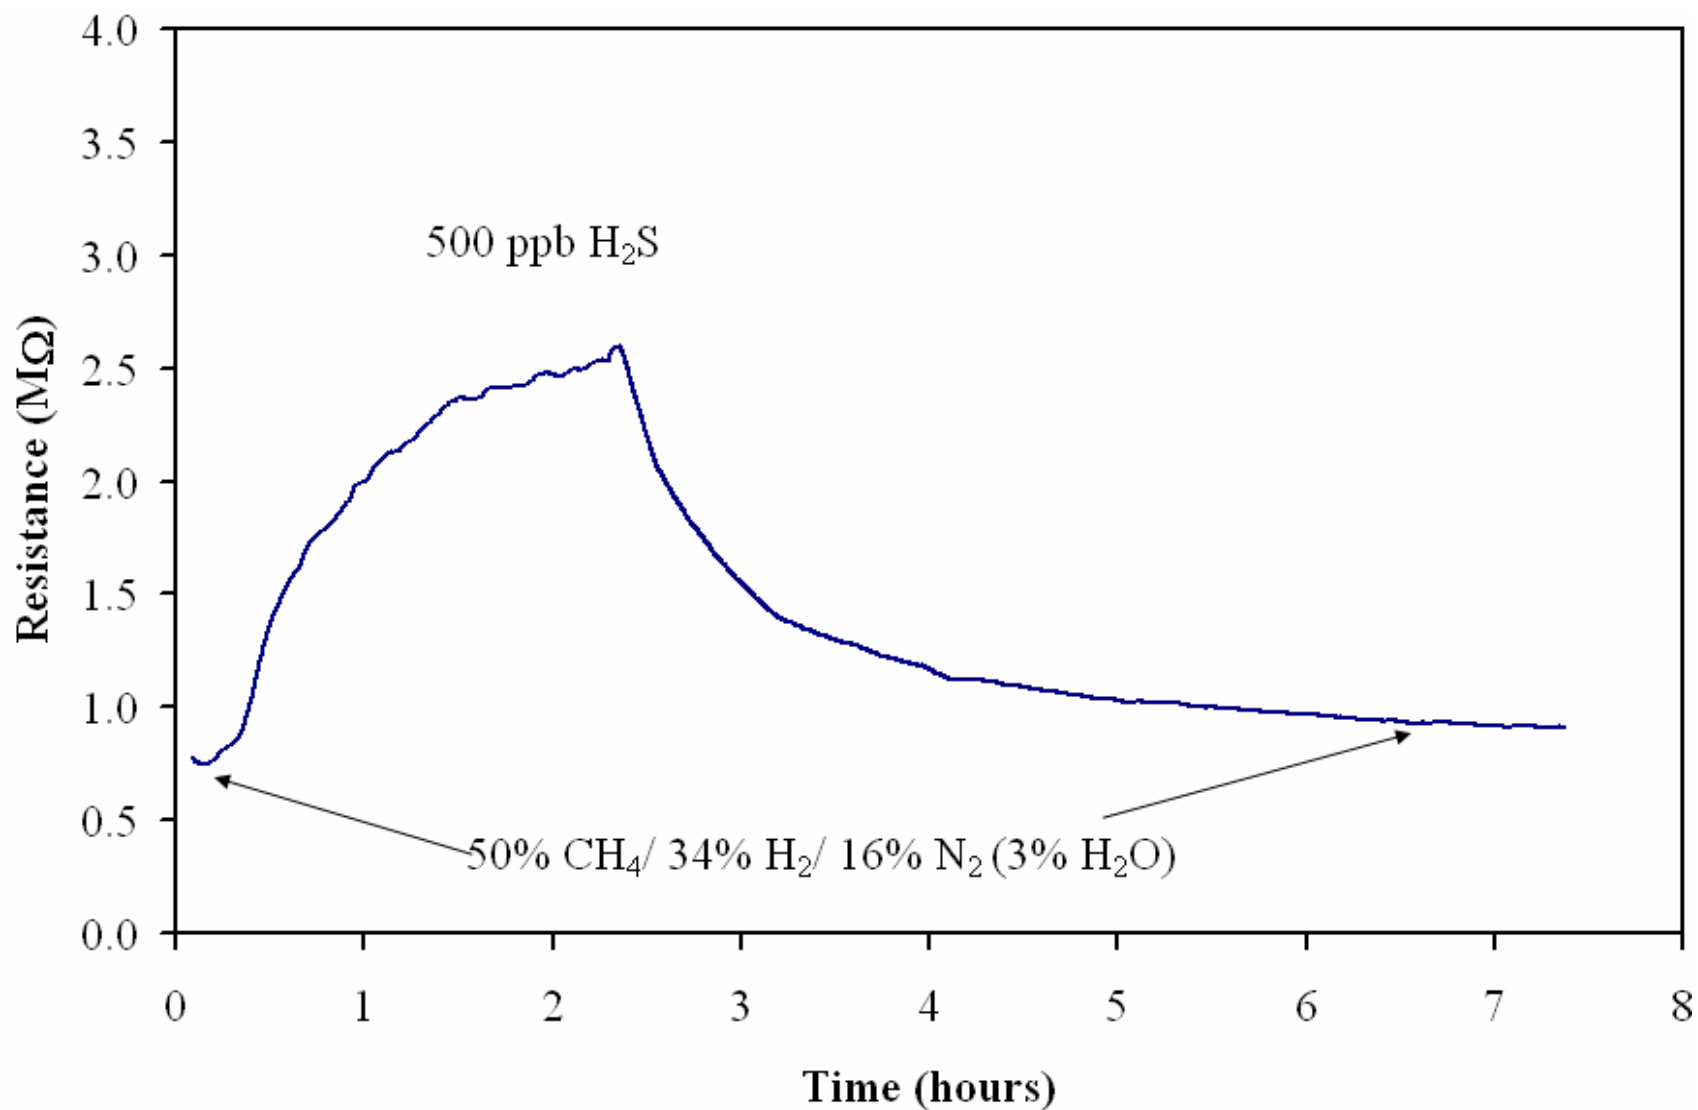

Responses to Previous Year Reviewers' Comments

- **Redundancy between IIT and UTRC facilities.**
 - Two independent laboratories with emphasis on different chemical and physical sensors.
- **Need to look at other sensor work**
 - IIT is continually looking at other sensor technologies and updating the sensor database
- **A clear manufacturer has not been identified**
 - ATMI and NexTech, for example, are addressing design for manufacture.
 - ATMI has sold technology to a sensor manufacturer for commercialization.

Future Work

- Address CO baseline drift issues
- Poisoning
 - Run in fuel cell mode to oxidize CO in situ
 - Thermal cycling experiments (desorb CO)
- Evaluate sulfur cross-sensitivity of CO sensor
- Continue collaboration with LANL on CO sensor
- LEL sensors
 - Focus on pd quad layer
 - Continue to improve life time performance
- Stack sensors
 - Focus on Rh quad layer
 - Optimize materials design
 - Characterize short and long term behavior
- H₂S sensors
 - Focus on Rh ultra-thin films
 - Characterize short term concentration behavior
 - Look for cross sensitivities

Hydrogen Safety

The most significant hydrogen hazard associated with this project is:

- Gas mixtures containing up to 70% by volume of hydrogen will be utilized.
- The presence of hydrogen does present a hazard if a leak occurs in the gas piping system so that hydrogen can mix with laboratory air.

Hydrogen Safety

Our approach to deal with this hazard is:

- Flammable gas detectors were located in our laboratory; a relay opens and turns off power to solenoid valves on the H₂ supply at H₂ levels above 10% of LEL.
- The LabView-based control program senses the alarm, shuts off all other gases and purges all gas lines with N₂.
- All valves used in the experimental apparatus are explosion-proof.
- Pressure relief valves are used in all piping to prevent over-pressurization of components.