



PolyFuel™


**DMFC Power Supply for All-Day
True-Wireless Mobile Computing**

**Brian Wells
May 25, 2005**

Year	PolyFuel Share	DOE Share	Budget Amount
Sept. '04 – Sept. '05	\$1,048,000	\$941,668	\$1,990,000
Sept. '05 – Sept. '06	\$1,265,000	\$1,135,000	\$2,400,000
Sept. '06 – Sept. '07	\$1,028,000	\$922,000	\$1,950,000
Total	\$3,340,000	\$3,000,000	\$6,340,000

- **Volumetric Power Density:** > 30 W/l
- **Gravimetric Power Density:** > 30 W/kg
- **Energy Density:** > 500 W·h/l
- **Cost:** < \$5/Watt
- **Lifetime:** > 1000 hours


Project Timeline

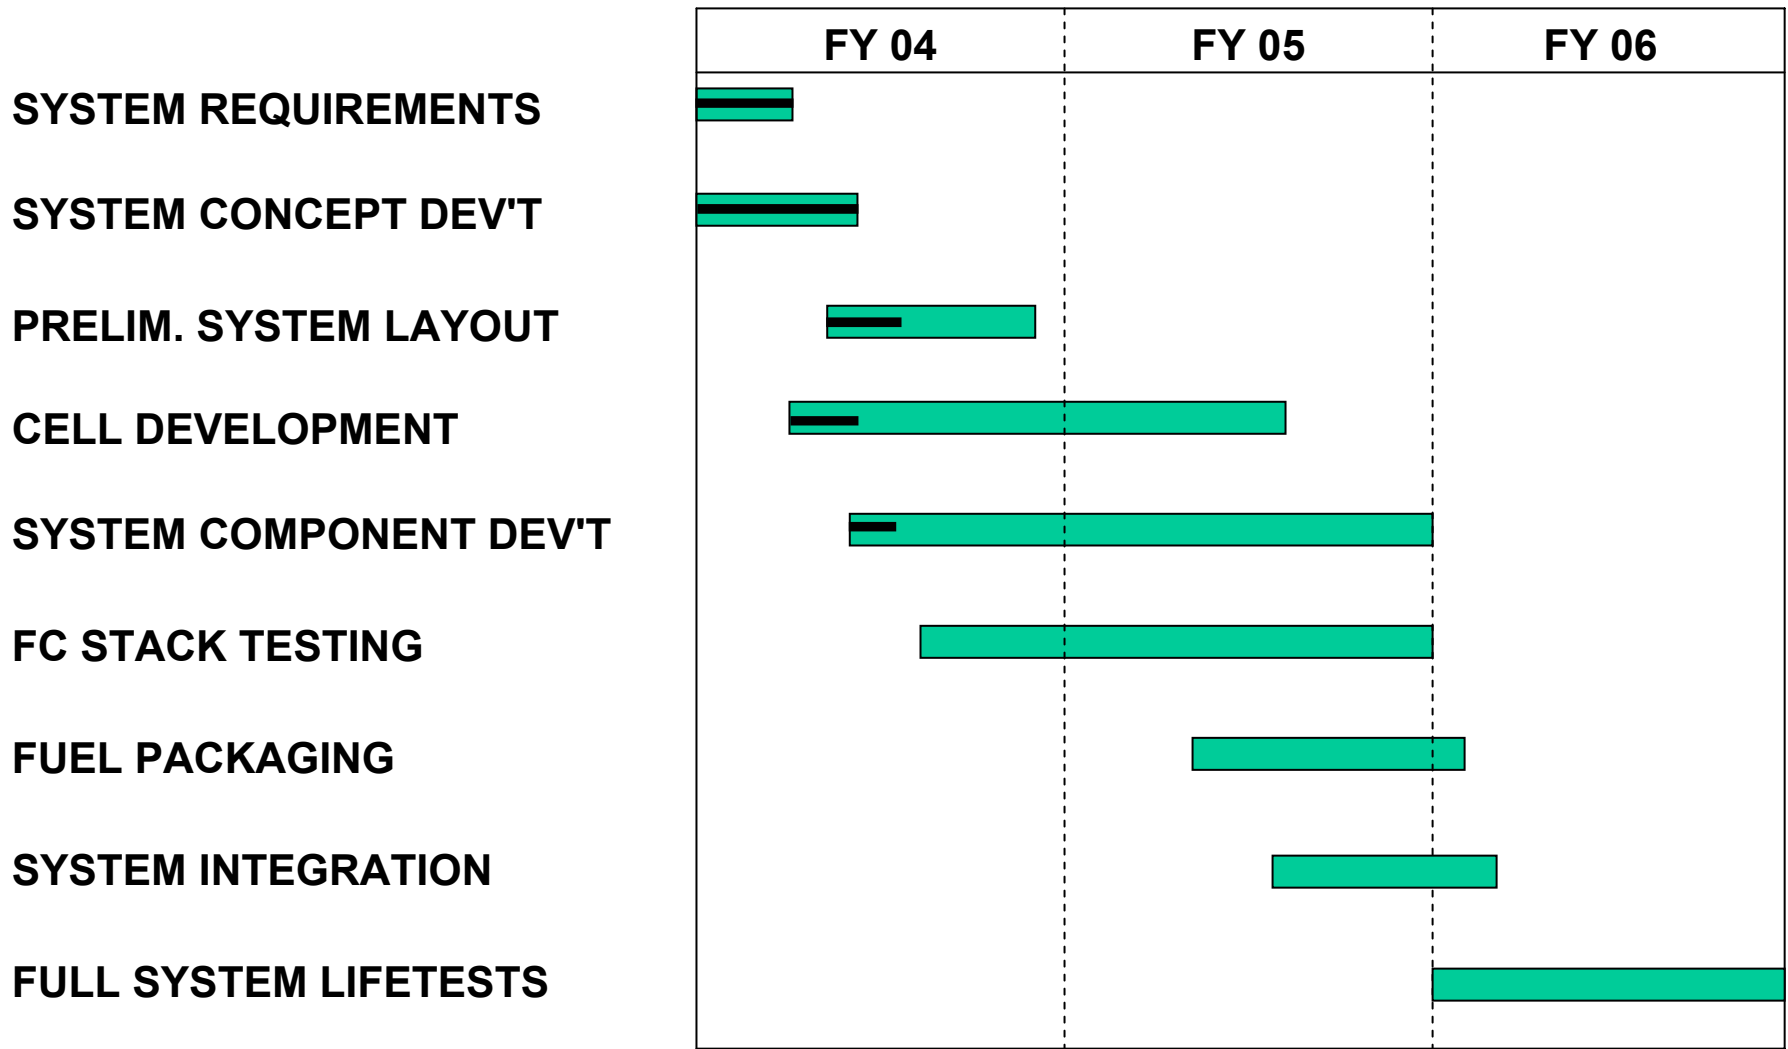

- **To build a DMFC laptop power supply with a significant advantage over Li-ion batteries**
- **To fully integrate this power supply into a laptop computer**
- **A radical departure from conventional active systems is required to realize competitive power density**

Requirements Definition

- Average Power Level: 15 Watts
- Peak Power Level: 40 Watts
- Voltage: 8.0 - 12.6 Volts, with 10.8 Volt nominal
- Requires Fuel Cell – Battery hybrid design

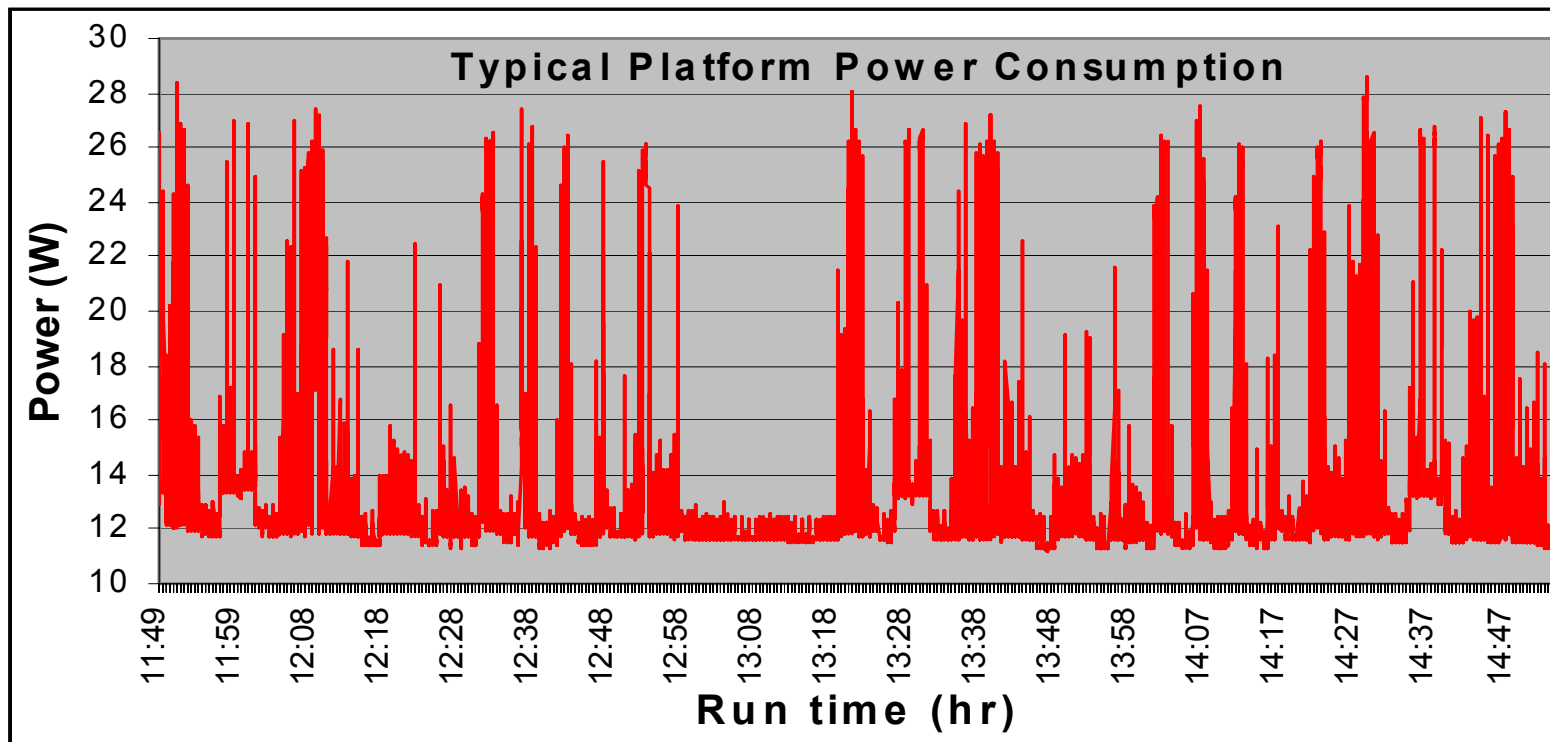

- **Operating Life: 1000 hours or 125 refueling cycles**
- **Cost: Less than \$100 per unit at 100,000 per year**
- **Ambient Temperature: +5 °C to +40 °C**
- **Orientation Independent**
 - Must run while tilted or inverted
- **Fuel cell system volume: 250 cc**
- **Methanol cartridge volume: 120 cc**
- **Fuel: pure or nearly pure methanol**
- **Maximum noise level: 40 dbA at 0.5 meter**

The best system will involve co-optimization of membrane properties and system strategy

PolyFuel is approaching the problem from both sides

System/Cell

“What membrane properties are required by the cell/system?”


Operating Strategy

Electrical Architecture

Water management

Thermal Management

Packaging

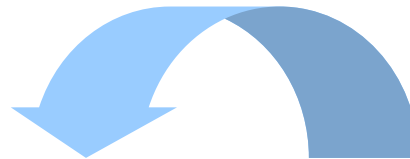

Membrane

“What conditions are required by the membrane?”

Conductivity

MeOH crossover


Diffusivity

Mechanical Strength


Bonding




- 25 prototype polymers have been made and cast into membrane
- These materials are being screened for desired properties in a variety of in-situ and ex-situ tests
- **Ex-situ screening tests include:**
 - Conductivity
 - Diffusivity (methanol, water)
 - Tensile strength
 - Chemical stability
- **In-situ screening tests include:**
 - Performance on PolyFuel standard cell design at 1M methanol
 - Methanol crossover
 - Electro-osmotic drag (EOD)

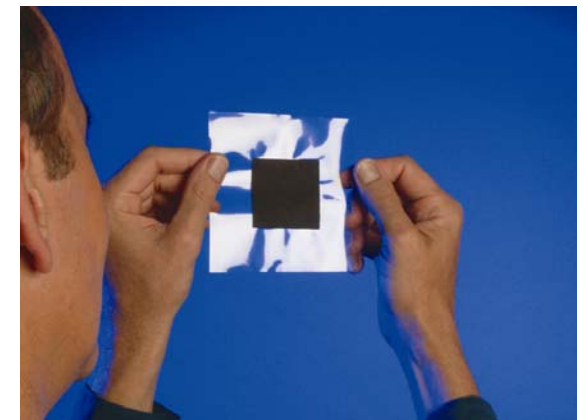

PolyFuel Methanol Cross Over Comparison

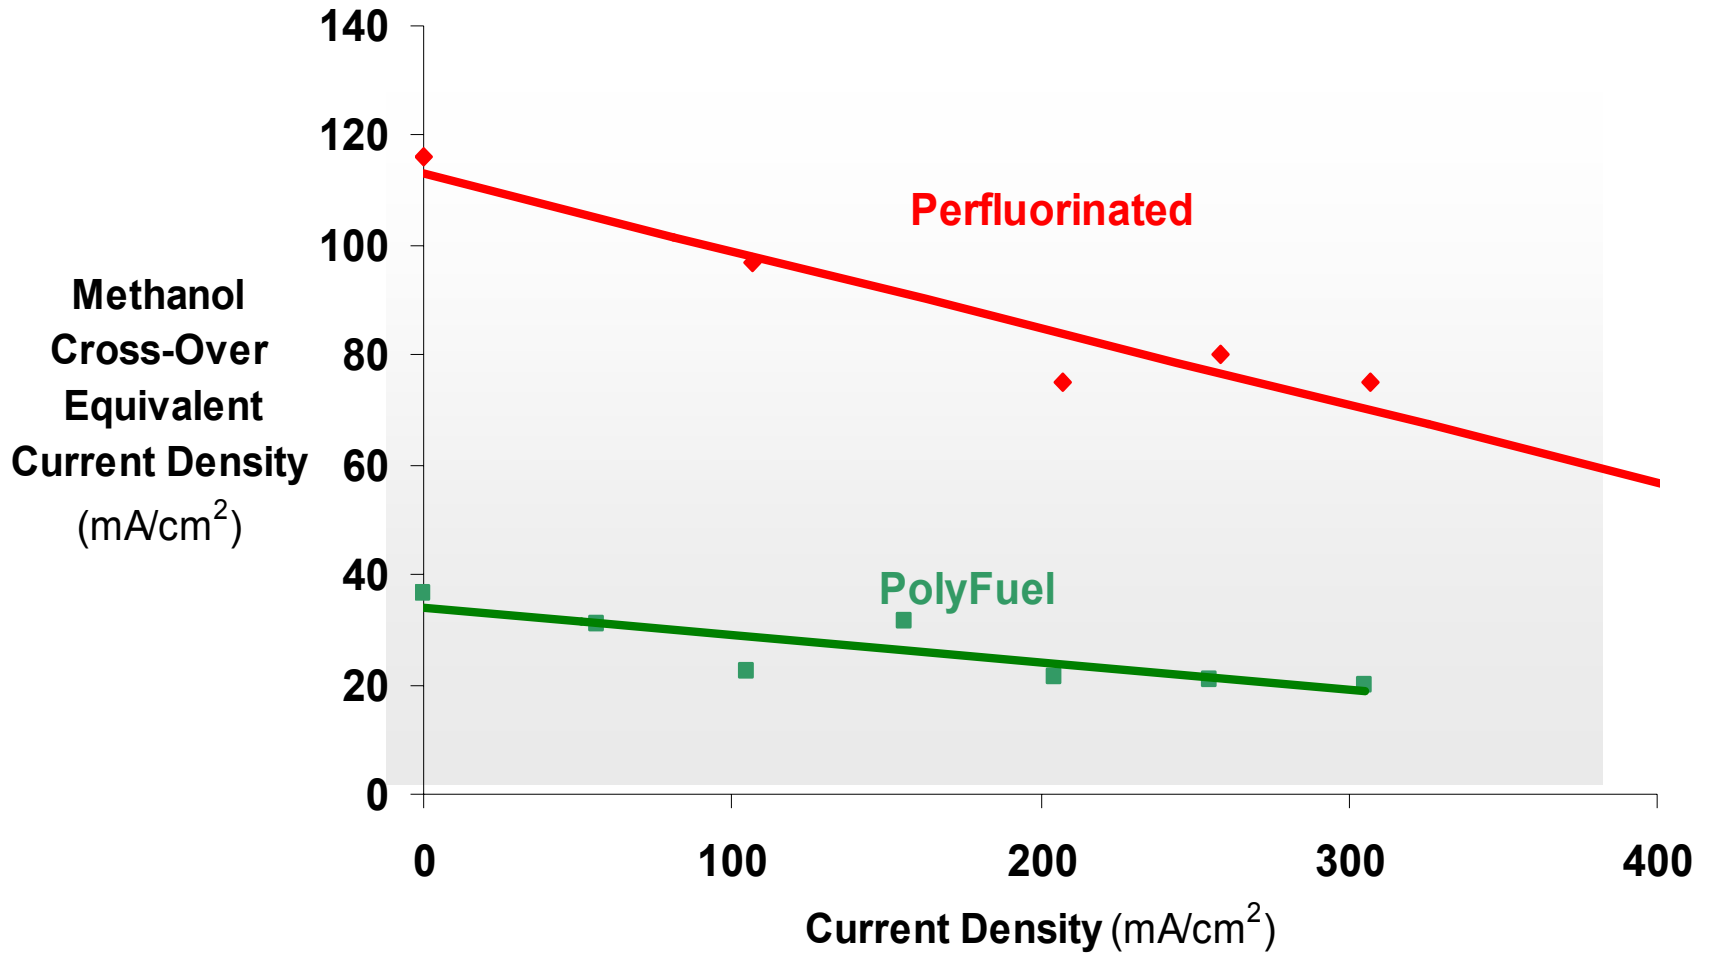


Note: Standard PolyFuel Active Test Cell Conditions used

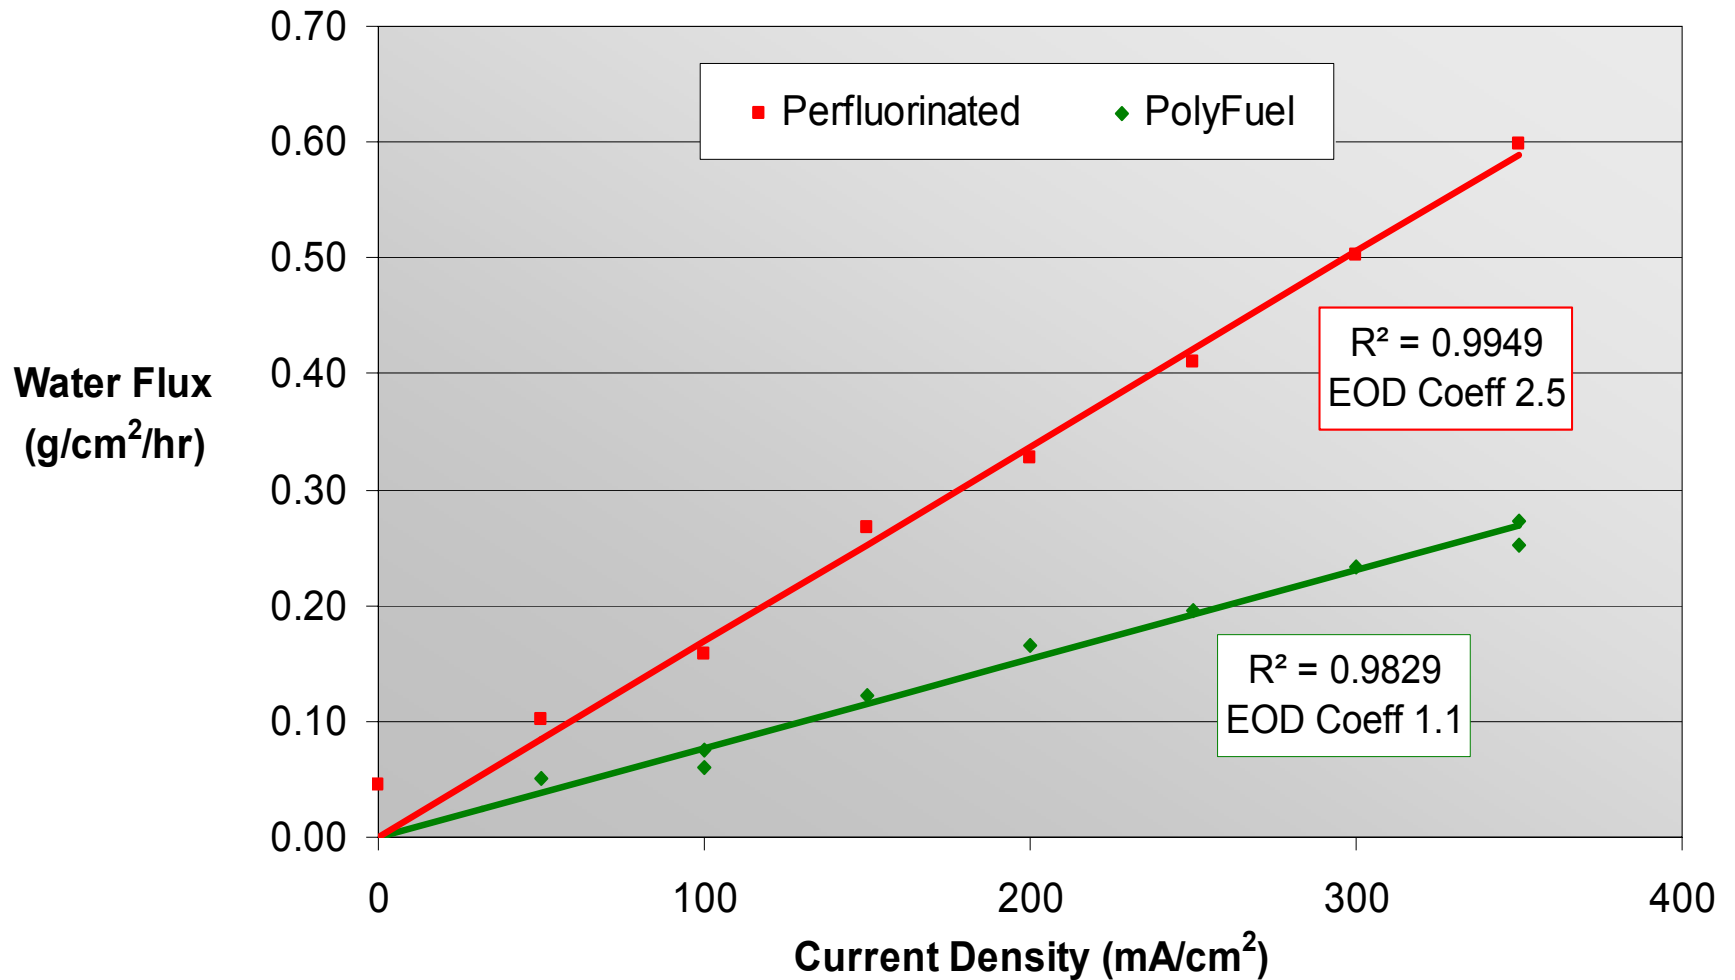


Note: Standard PolyFuel Active Test Cell Conditions used

- **Hot bonded membrane allows for simpler cell assembly with lower cell compression**
- **PolyFuel has developed a hot bondable membrane with good properties for passive type DMFC applications**
- **The pretreatment conditions need to be matched with the hot press bonding conditions**

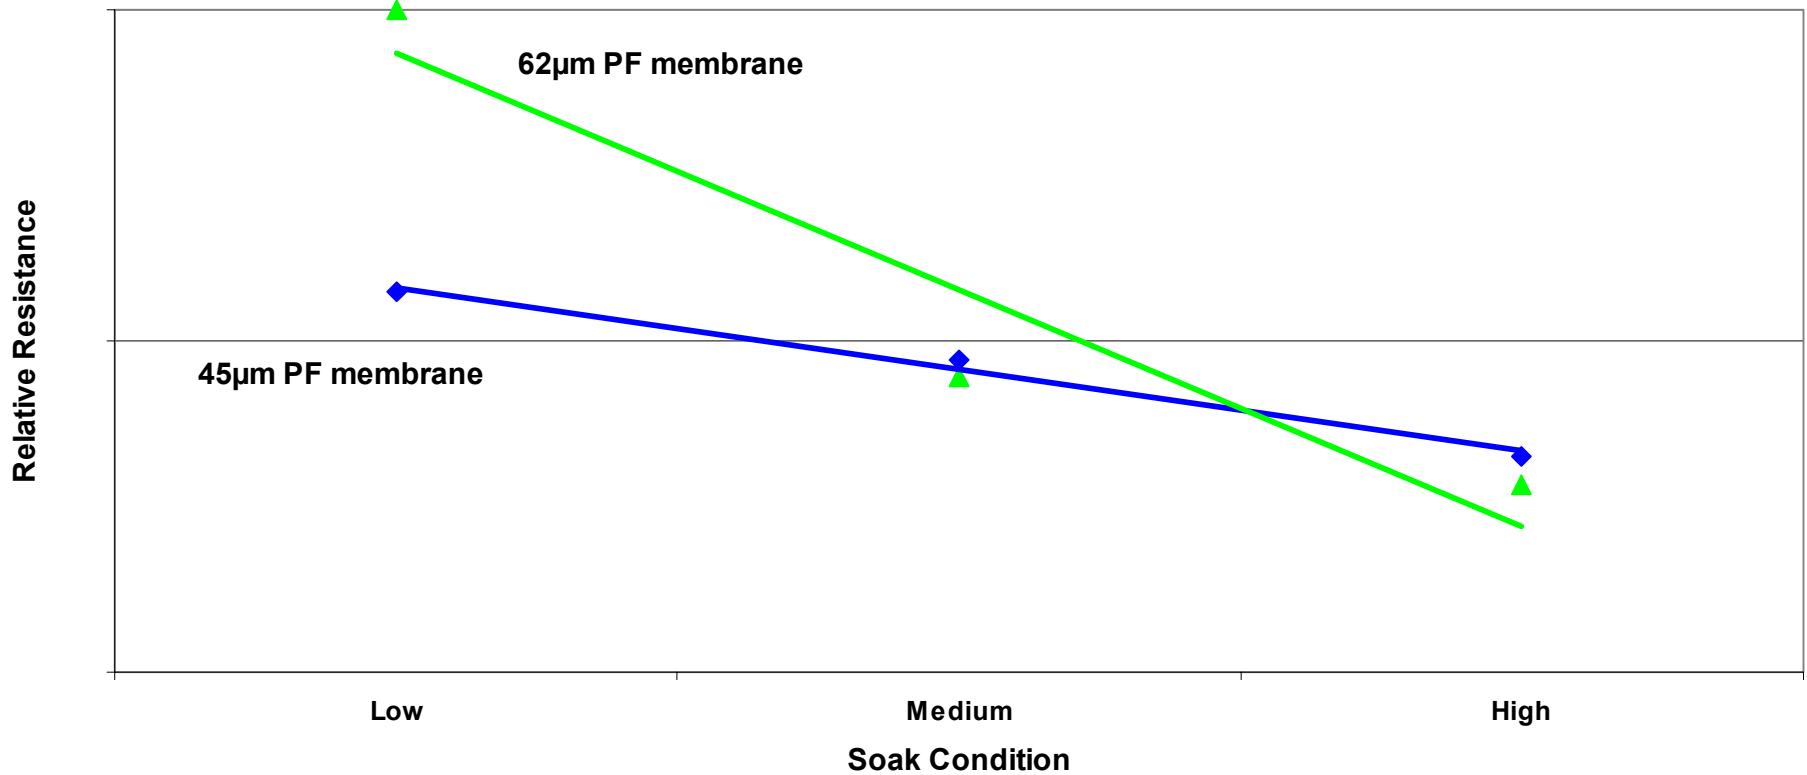


Relative performance of cells depends on Hot Press Conditions

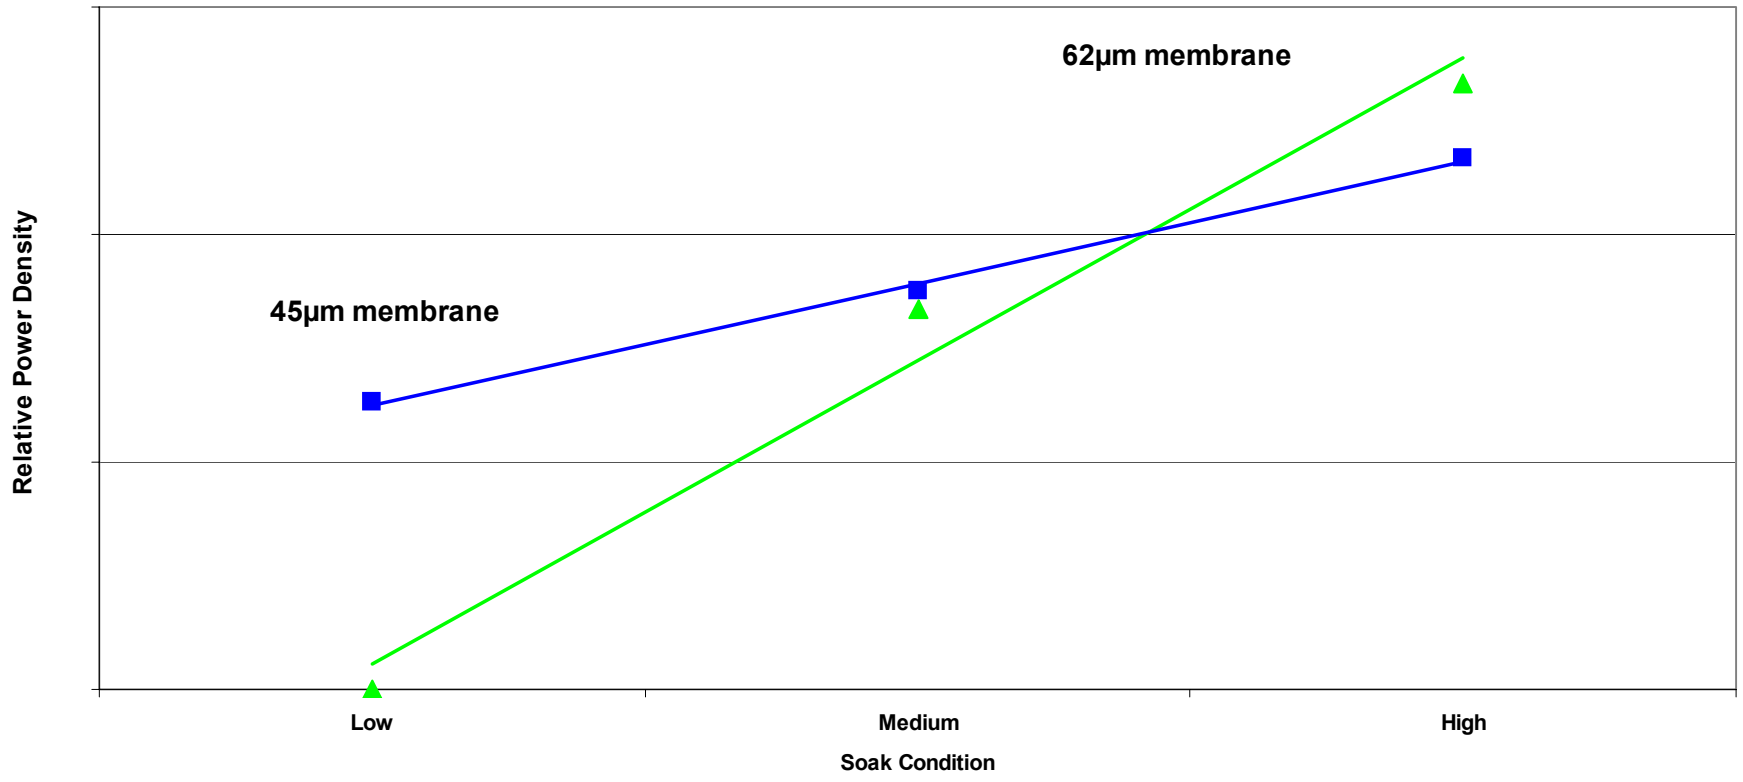

- **System (thermal and fluid) performance model complete**
- **Variety of system and cell architectures have been evaluated**
- **A preferred architecture has been downselected based on multiple criteria:**
 - Packaging (into a laptop)
 - Thermal management
 - Water management
 - Power density
- **Key membrane properties have been identified**

Designed, built and installed 12 test stations for air breathing cell testing

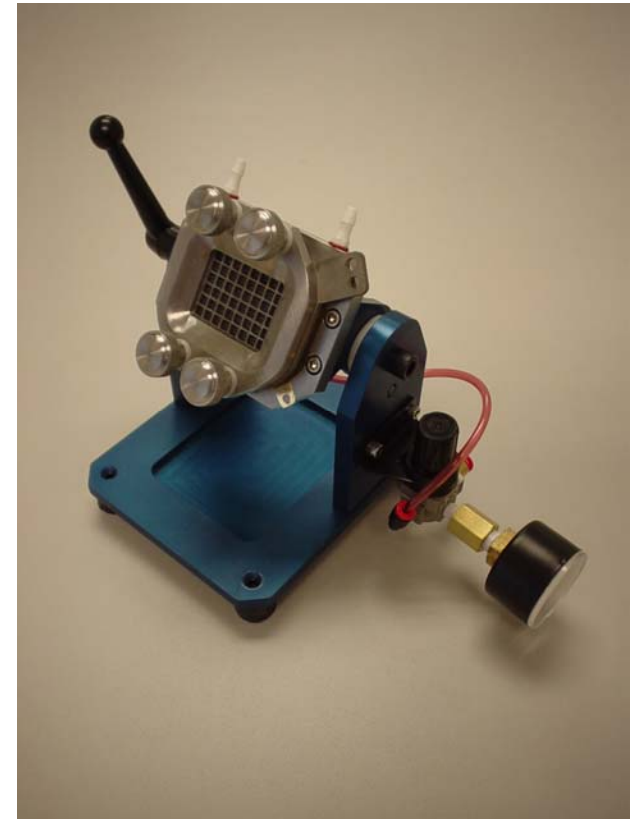

- **Develop cell performance model, including multi-species transport and 2 phase flow effects**
- **Build system-intent cell array and conduct performance and durability testing**
- **Develop fuel delivery, oxidant delivery, cooling subsystems**
- **Develop power conditioning and power integration with laptop battery and laptop electronics**

Major concern is large hydrogen leak into lab

- Excess flow valve at bottle
- Restrictor orifice limits total H₂ flow into lab manifold to ~20 SLPM
- Small onsite hydrogen inventory such that leaking the entire contents will not exceed 50% LEL
- Large fan in lab area aids in convective mixing of H₂ to dilute any leak
- Hydrogen detector in lab