

Novel Compression and Fueling Apparatus to Meet Hydrogen Vehicle Range Requirements

Todd Carlson
Future Energy Solutions
Air Products and Chemicals, Inc.
May 25, 2005

Contributors:
David Chalk (Machinery Design)
Nick Pugliese (Fabrication)
Mark Rice (Controls)

Project ID: TV6

This presentation does not contain any proprietary or confidential information

Overview

● Timeline

- Project Start 10/2002
- Contract 5/2004
- Project End 2/2006
- 85% Complete

● Budget

- Total \$690,875
- DOE Share \$345,438
- APCI Share \$345,438
- 04 Funding \$317,606
- 05 Funding \$373,088

● Barriers

- High cost of hydrogen compression
- Cost of hydrogen

● Collaboration

- Tescom
- Genesys
- Weh
- OPW
- Walther
- Spir Star

Objectives

- **Primary**
 - **Develop a process design for a novel compressor**
 - **Develop mechanical design for novel compressor**
 - **Select a test hydraulic fluid**
 - **Machine/Manufacture Compressor parts & components**
 - **Assemble prototype system and test**
 - **Demonstrate operation of the system**
 - **Final report**
- **Secondary**
 - **Investigate other fueling components to support 700 barg (10,000 psig) hydrogen fueling**

Approach

- **Conceptual Design**
- **Process Design**
- **Thermodynamic Data**
- **Fluid Selection and Testing**
- **Dynamic Modeling**
- **Component Design, Fabrication, and Testing**
 - **Machining of compressor parts complete**
 - **New valves developed for 15,000 psig**
 - **New relief valves being tested and qualified**
 - **New pressure switch identified**
 - **New thermocouple wells designed**
- **Prototype**
 - **Skid hazard review**
 - **Components on order for test skid**
- **Long Term Testing**
 - **Site selection and funding**

Approach


Design Issues

- **Compressor**
 - Isothermal (~50 Deg F rise)
 - High pressure (~14,000 psig)
 - Single stage
 - Low cost
- **Fueling Station**
 - Lower the delivered cost of hydrogen
 - Composite vessels (ASME approval)
 - Lined steel vessels are \$110,000/ft³ at 15000 psig
 - Breakaway and fuel nozzle (Walther, OPW, and Weh)
 - Fueling codes

Safety

- **Air Products Hydrogen Experience**
 - Over 12,000 fills (75-100/week)
 - 10 fuel stations installed last year (32 total, 12 in construction)
 - Industrial hydrogen (30+ years, 55% merchant market share, 1000 gaseous/500 liquid customers, pipelines, purification/separation, reformers, electrolysis)
- **Our fueling systems have undergone rigorous third party independent safety reviews**
 - ABS Consulting – Singapore
 - NASA - White Sands, NM
 - KHK/JHPGSL – Kagoshima, Japan
 - International Refinery Services – Singapore
 - Beijing Government – FSR Permitting
 - KGSL – Seoul, Korea
 - UL and Metlabs


Timeline

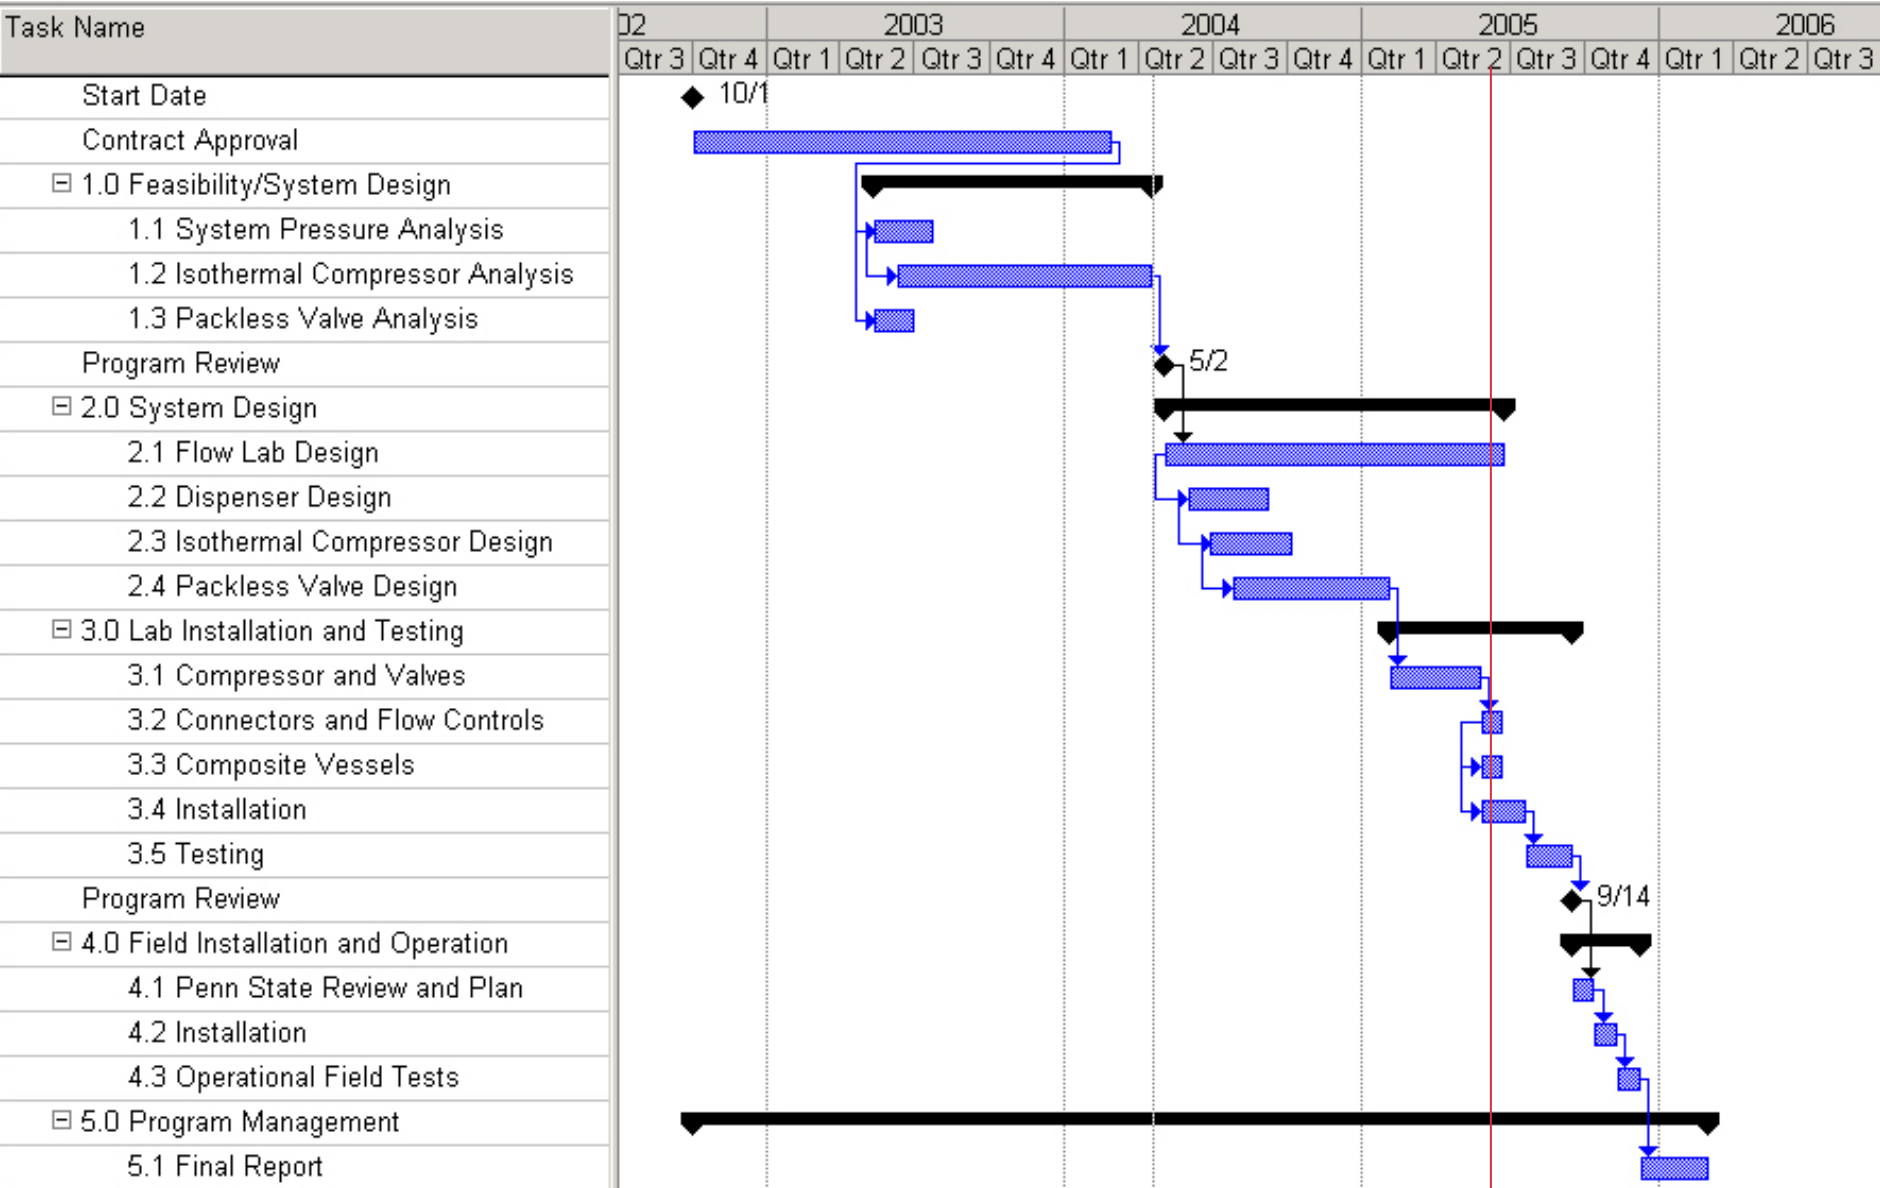

Technical Accomplishments

Novel Compressor – Basic Concept

- **Isothermal:** Gas cooled during compression (50 °F rise)
- **Single Stage:** Liquid piston permits high pressure ratio by elimination of piston to cylinder clearance and temperature concerns (140:1 compression ratio)
- **Liquid Pump:** Inherently lubricates all dynamic seals
- **Dynamic Gas Seals Eliminated:** No gas seals to atmosphere
- **Issues:** fluid carryover, level control

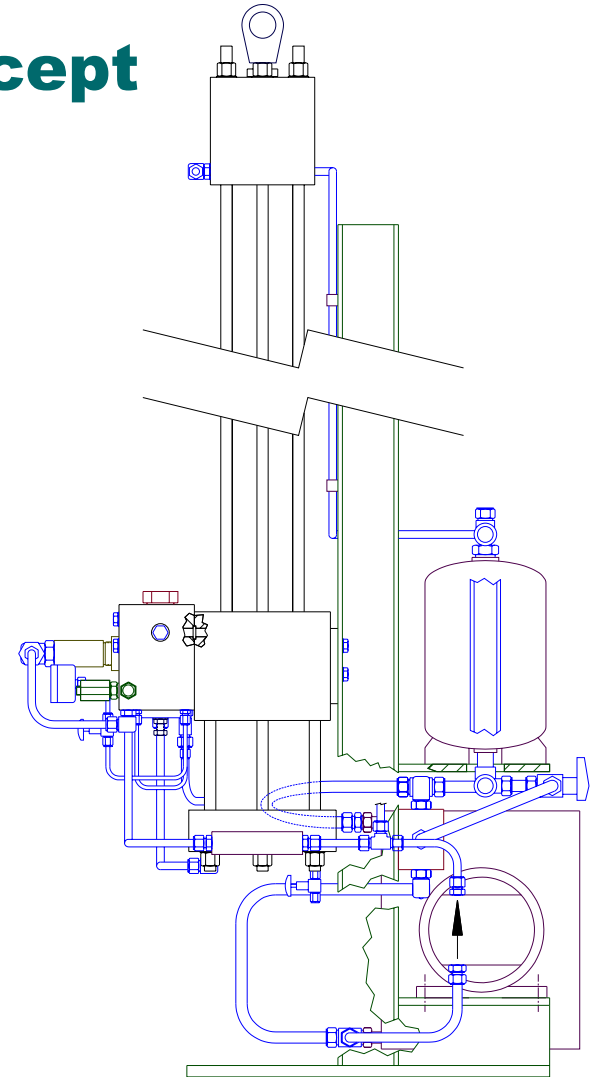

Patents Pending

many typical machinery issues eliminated by liquid piston

AIR PRODUCTS 


Technical Accomplishments

Existing Technology

- **Diaphragm Compressor**
 - Metal diaphragm separates gas from oil
 - 300 deg F temperature rise
 - 20:1 standard compression ratio
 - Up to 350 barg is bolted, higher pressure requires bootstrap
- **Hydraulic Intensifier**
 - Floating piston with rings separates gas from oil
 - 300 deg F temperature rise
 - 8:1 standard compression ratio
 - Smaller cylinder allows higher discharge pressures (long stroke at low RPM)

Technical Accomplishments


Cylinder Pressure and Temperature

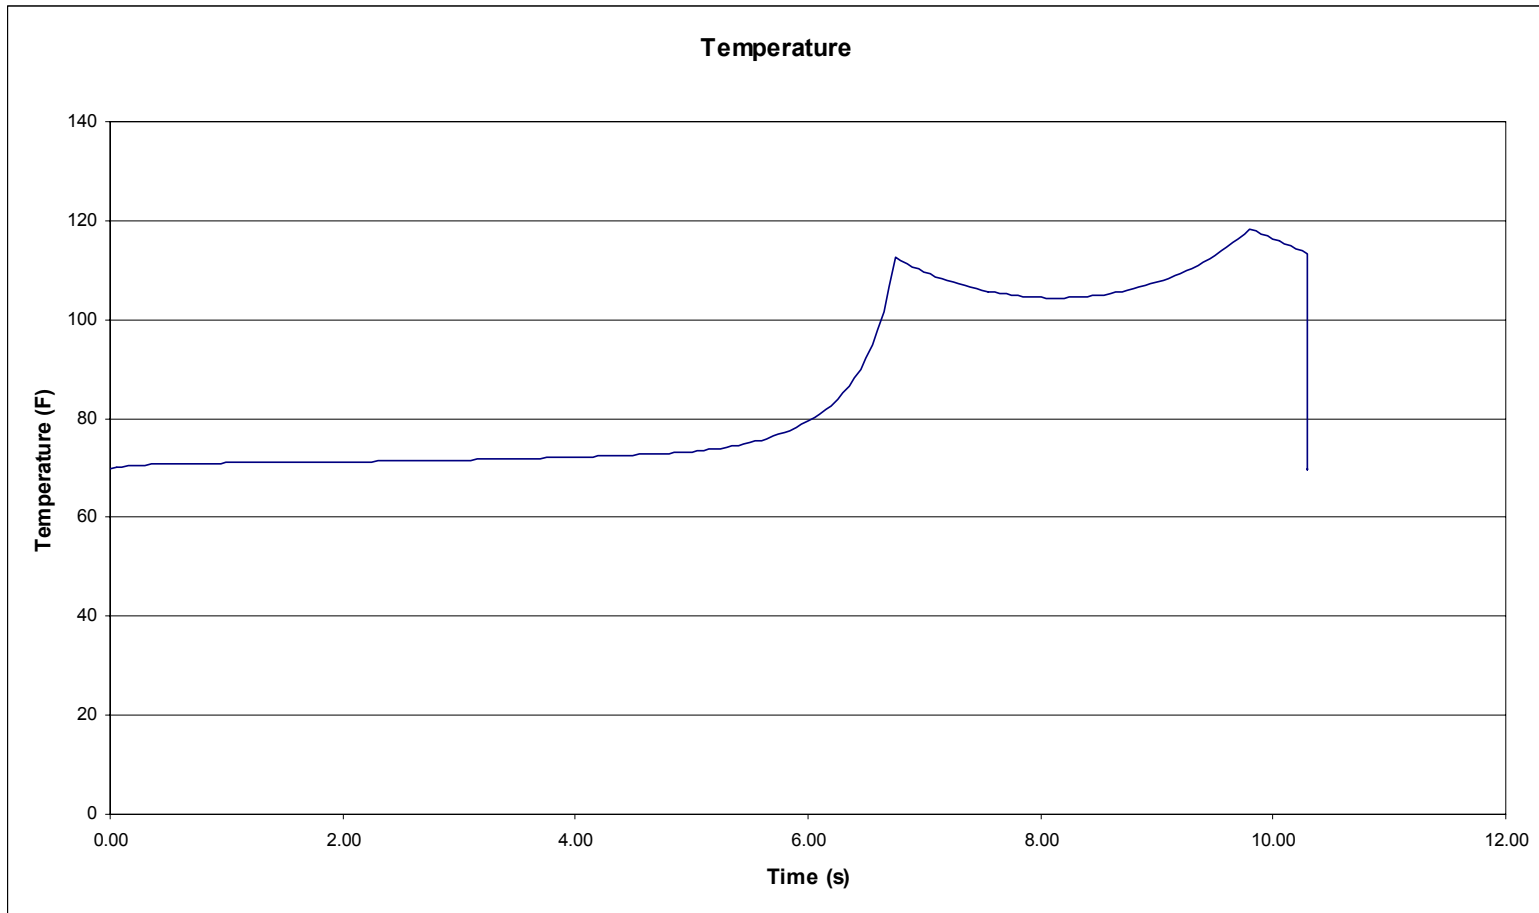

~ 50°F temperature rise for 140:1 compression ratio

Technical Accomplishments

Cylinder Pressure and Temperature

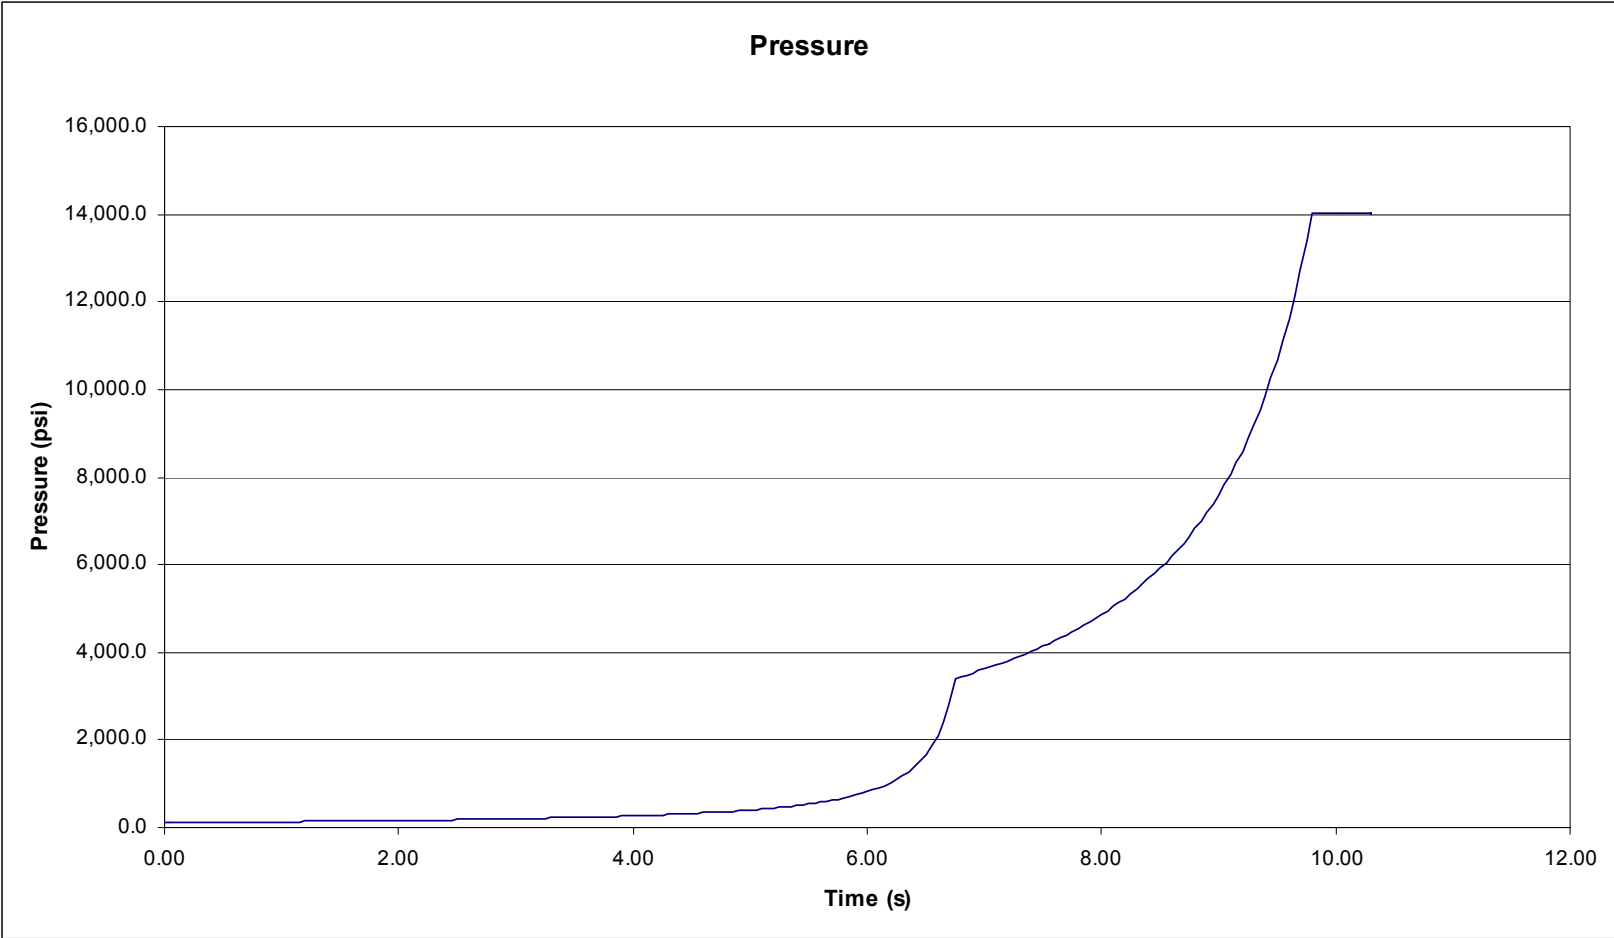

Technical Accomplishments

Dyanamic Simulation Results

- Identified key operational issues and design parameters:
 - Surface area requirements in heat exchanger and heat transfer coefficients for near isothermal operation
 - Liquid inventory management needs (pressure/flow regulation)
- Quantitative results on potential sources of inefficiency:
 - Hydraulic intensifier friction
 - Circuit DPs
 - Hydrogen solubility in compression fluid
 - Heat transfer limits and design of heat exchanger
- Process sensitivities to the following parameters studied:
 - Initial accumulator gas volume
 - Pump flow
 - Hydraulic intensifier flow
 - Valve flow coefficients

novel H₂ compressor unit is feasible

Technical Accomplishments

Pressure Analysis

- Automotive OEM's are pursuing 700 barg fueling to achieve US norm of 300 mile range.
- Fast fill (~ 4-6 minutes) is the method with the highest commercial potential.
- Cascade fueling is the most often used method of achieving a low cost, fast fill. This is not possible at 700 barg with steel storage cylinders due to cost.
- To achieve full fills, cascade filling requires a minimum of 25% overpressure to counter vehicle tank heating.
- Fast fill to 700 barg will require cooling of the hydrogen.
- ASME and Air Products requirements for relief valves (set at vessel MAWP) impose a maximum operating pressure of 90% of MAWP.

$$(700 \text{ Barg} * 125\%) / 90\% = 972 \text{ Barg MAWP (14100 psig)}$$

System pressure requirement is 14100 psig MAWP

Technical Accomplishments

Fueling Apparatus

- Air Products has developed hydrogen fueling systems up to 700 barg (10,000 psig).
 - Valves
 - Manual
 - Actuated
 - Pressure Control
 - Flexible Hose
 - Tubing
 - Fittings and Adapters
 - Controller
 - Packaging



Most components available today for 700 barg fueling

Responses to Questions

- **What fluid is used for a the compressor?**
 - **Krytox Fluorocarbon Oil**
 - **Patents are submitted and contract with DOE and DEP are now signed**

Future Work

- **Assemble and Test.**
- **Determine overall costs.**
- **Determine feasibility of future use.**
- **Long term prototype testing, if warranted.**
- **Final Report**

Interactions/Collaborations

- **Air Products and Chemicals, Inc.**
 - **Future Energy Solutions**
 - **Advanced Systems Machinery**
 - **Advanced Controls**
 - **Dynamic Modeling**
 - **Corporate Safety**
- **Tescom**
- **Spir Star**
- **Barksdale**
- **Ashcroft**
- **Weh**
- **OPW**
- **Walther**

Questions?

Thank you

tell me more

www.airproducts.com

Publications and Presentations

- **May 2003 – DOE Peer Review**
- **May 2004 – DOE Peer Review**

Hydrogen Safety

The most significant hydrogen hazard associated with this project is:

Drawing air into the compressor suction and compressing into the high pressure hydrogen storage vessels. Given the correct conditions, this could result in a high pressure flammable gas mix. Deflagration or detonation of this mixture could result in failure of the vessels.

Hydrogen Safety

- Our approach to deal with this hazard is:

We have completed a Level of Protection Analysis that takes all physical and operating conditions into consideration to determine the probability of the event occurring. We also utilize a low pressure switch on the compressor inlet (hard-wired to PLC power). This pressure switch is functionally tested every quarter.