



Dimensionally Stable Membranes™

Shelly Brawn, Han Liu, Cortney K. Mittelsteadt*
Giner Electrochemical Systems, LLC

Anna Flach, Fred Johnson, Israel Cabasso
SUNY-ESF

FC036

Dimensionally Stable Membranes for High Temperature Applications

Timeline

- Begin 4/3/2006
- Review 4/1/2011
- 80% Complete

Budget

- Total project funding (to 2009)
 - \$1.5 M DOE Funding (w/go)
 - \$589K Recipient
 - 35% Cost Share
 - \$300K received FY 2009
 - \$241K to be received in FY 2010
 - \$1100K DOE funds spent to date

Barriers Addressed

A. Durability

B. Cost

Technical Targets (DOE 2010 Targets)

- 0.10 S/cm at 1.5 kPa H₂O Air inlet
- <\$40/m²
- > 5000 h lifetime
- Stability in Condensing conditions

Partners

- General Motors
- SUNY-ESF

OVERVIEW


- OBJECTIVES
- APPROACH and ACCOMPLISHMENTS
 - Rationale
 - Two Dimensionally Stable Membranes™
 - Three Dimensionally Stable Membranes™
- CHALLENGES

OBJECTIVES

YEAR	OBJECTIVE
2006	Determine the effect of pore size and substrate thickness. Demonstrate polymerization of the PFSA.
2007	0.07 S/cm at 80% RH at room temperature.
2008	Go/No-Go Decision: Demonstrate, by the 3rd Quarter, membrane conductivity > 0.1 S/cm at 25% relative humidity at 120°C using non-Nafion [®] materials. Samples will be prepared and delivered to the Topic 2 Awardee.
2009	Demonstrate ability to generate these materials in quantities suitable for automotive stack. Prepare samples for Topic 2 Awardee
2010	Build short stack with optimized materials and demonstrate durability
2011	Demonstrate how these materials can be produced to meet DOE cost targets

OBJECTIVES: Ultimate Goal

Meet performance targets with film that can be generated in roll at DOE cost targets

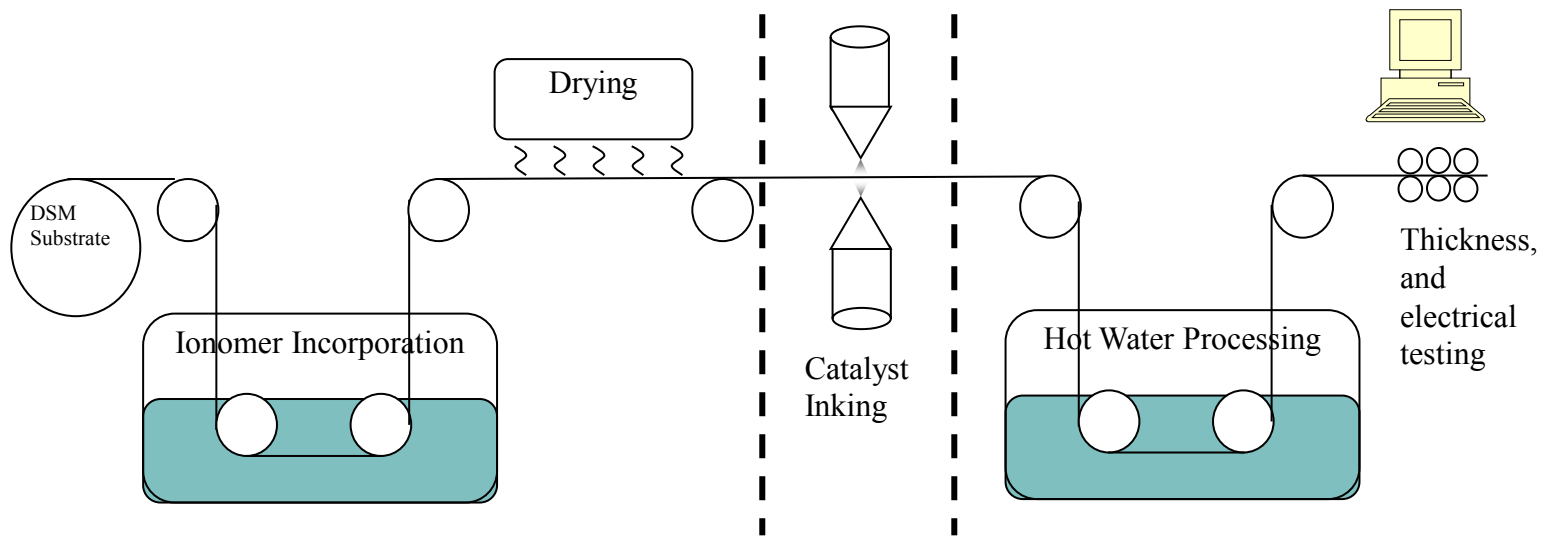

OVERVIEW


- OBJECTIVES
- APPROACH and ACCOMPLISHMENTS
 - Rationale
 - Two Dimensionally Stable Membranes™
 - Three Dimensionally Stable Membranes™
- CHALLENGES

APPROACH: Rationale

- Limitations of Ionomers based on $-\text{SO}_3\text{H}$ functionality
 - Water uptake/retention as a function of RH
 - Conductivity Limitations
 - Dependence on Water
 - Functionality

APPROACH: Rationale

Water Uptake of Ionomers based on $-\text{SO}_3\text{H}$ Moiety


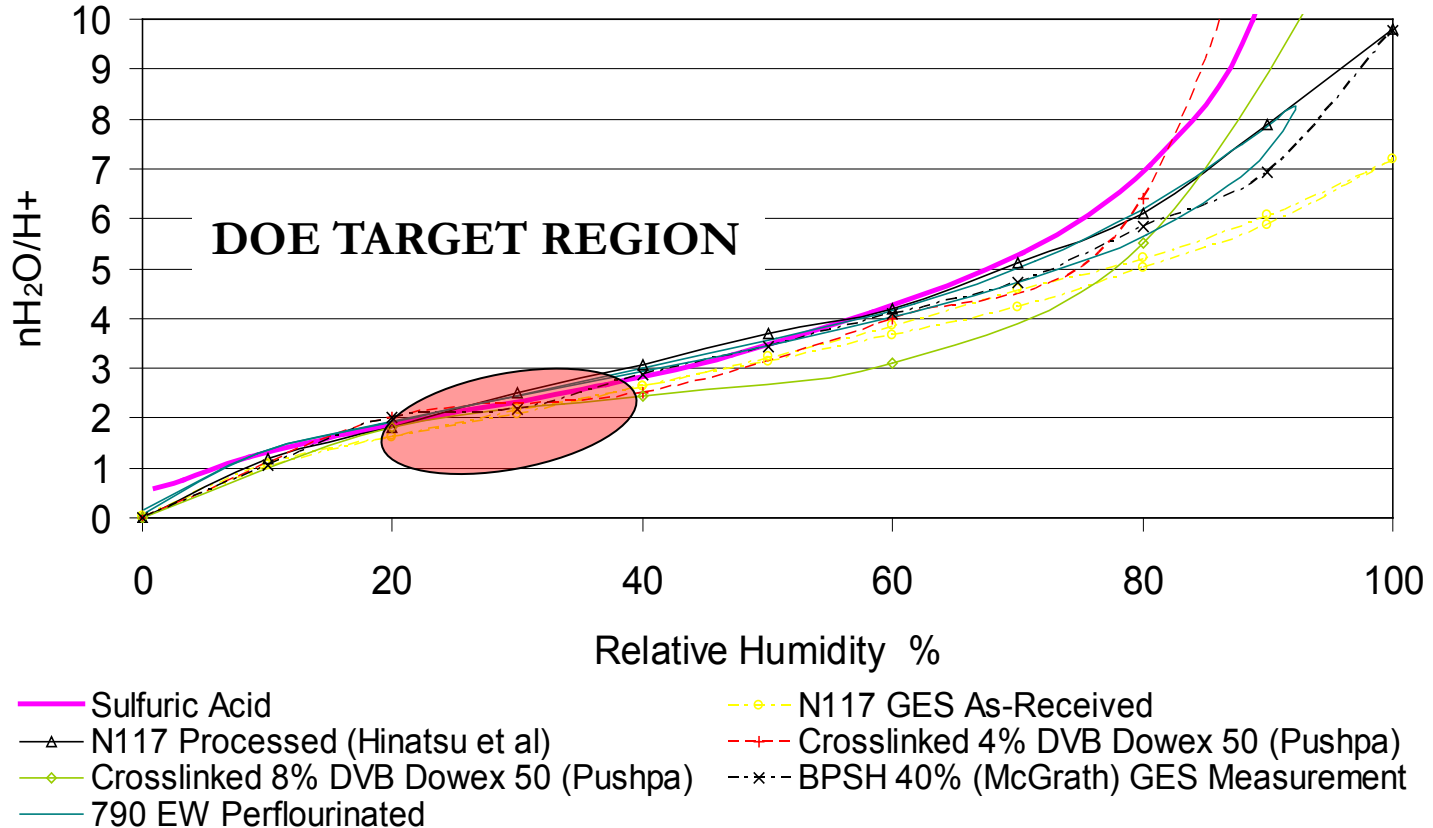


Water Content is the same regardless of pendant group

APPROACH: Rationale

Importance of Ionic Functional Group, Morphology

Conductivity of Various Ionomers and Model Compounds at 80°C

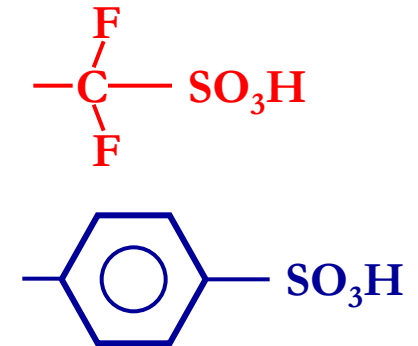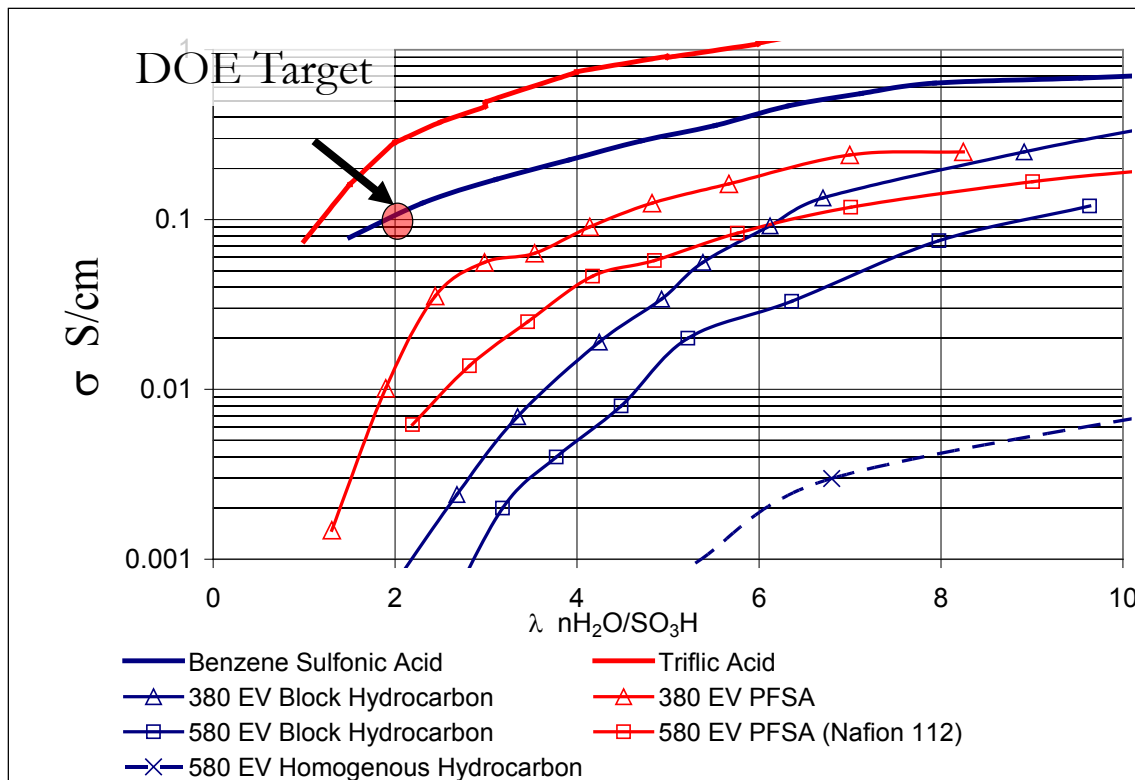


$$EV = \frac{EW}{Density}$$

APPROACH: Rationale

Limitations of Ionomers Based on $-\text{SO}_3\text{H}$ Moiety

Predicted Conductivity at 100°C for Various Perfluorinated Membranes

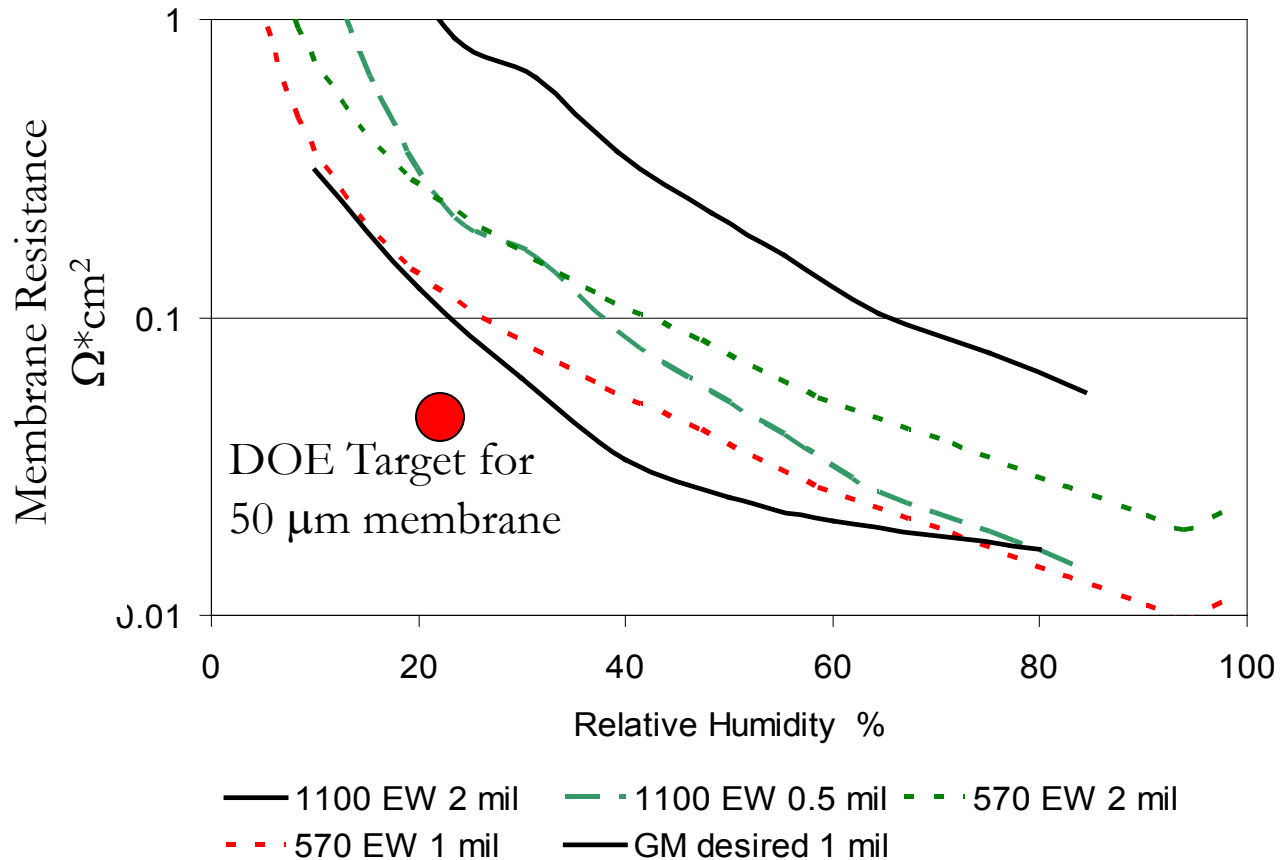

APPROACH: Rationale

CONCLUSIONS

SO₃H Polymers will need

- Very low EW
- Perfluorinated End Groups
- To be very thin

THESE THREE REQUIREMENTS LEAD TO POOR MECHANICALS

OVERVIEW

- OBJECTIVES
- APPROACH and ACCOMPLISHMENTS
 - Rationale
 - Two Dimensionally Stable Membranes™
 - Three Dimensionally Stable Membrane™
- CHALLENGES

APPROACH: Lower EW of perfluorosulfonic acid ionomers to increase low RH conductivity and support the ionomer with two and three-dimensional non-ionic materials

- Two Dimensionally Stable Membrane
 - Generate Supports
 - Thickness and Pore Size
 - Incorporate Ionomers
 - 700 to 1100 EW PFSA
 - Characterize
 - Performance
 - Durability
 - Cost/Manufacturability


- Three Dimensionally Stable Membrane
 - Develop Bulk Polymerization Methods
 - Polymerize in Selected Supports
 - Characterize
 - Performance
 - Durability
 - Cost/Manufacturability

Mag:700 kV:20 plasma clean, bottom surface 10 μm



ACCOMPLISHMENTS: 2DSM™

In-Plane Conductivity

700 EW Membrane with DSM™ Support, Conductivity as a function of RH

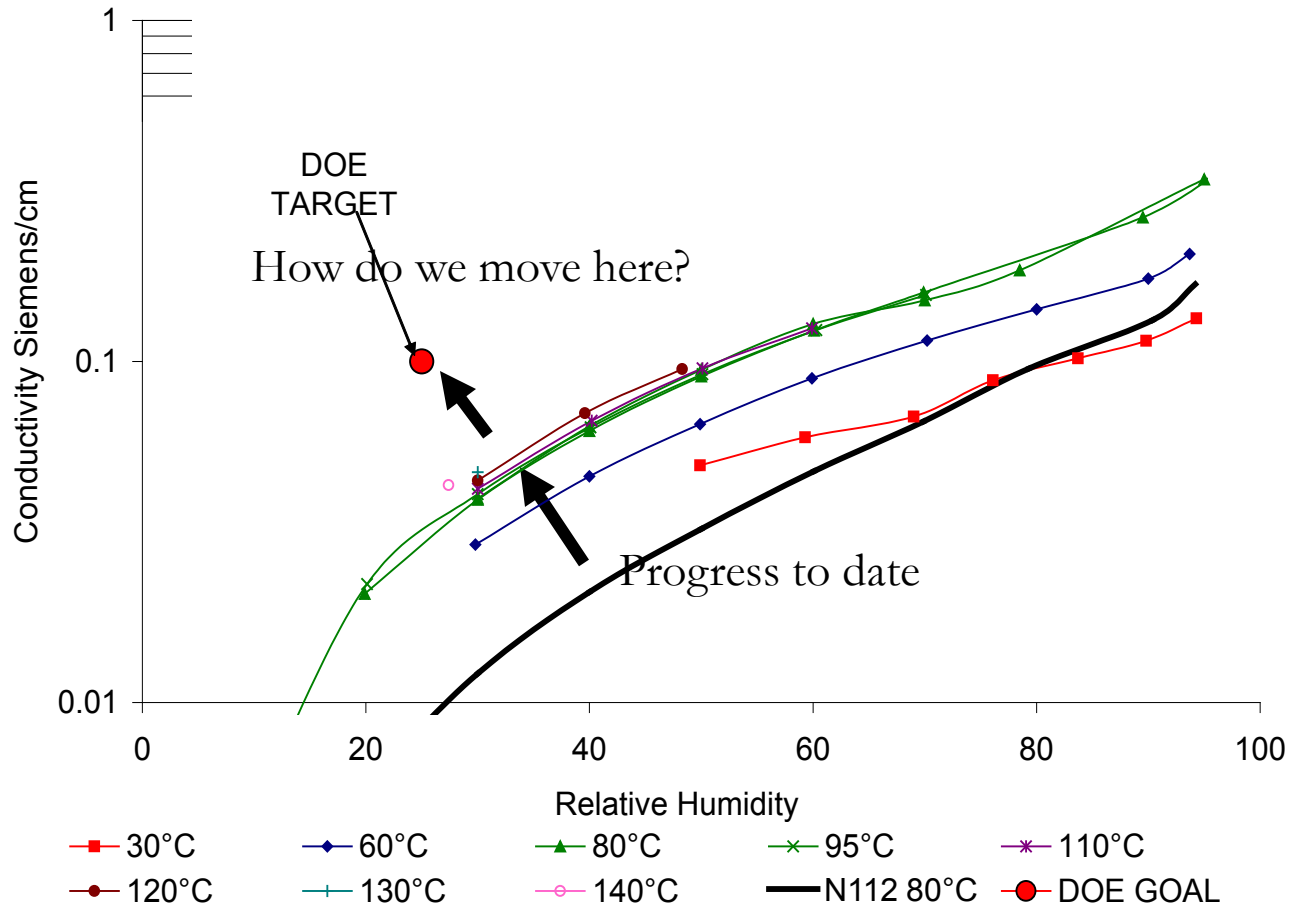

Challenges: 2DSM™

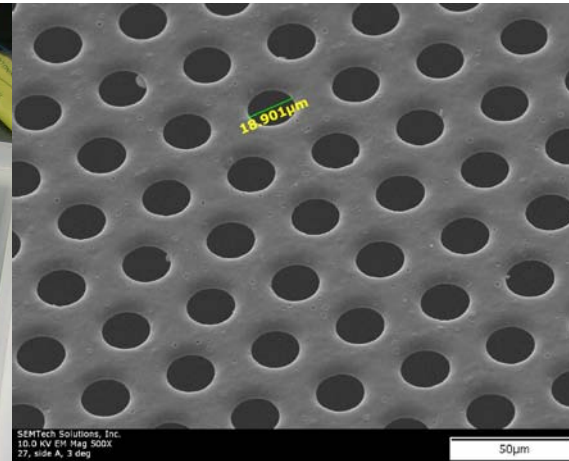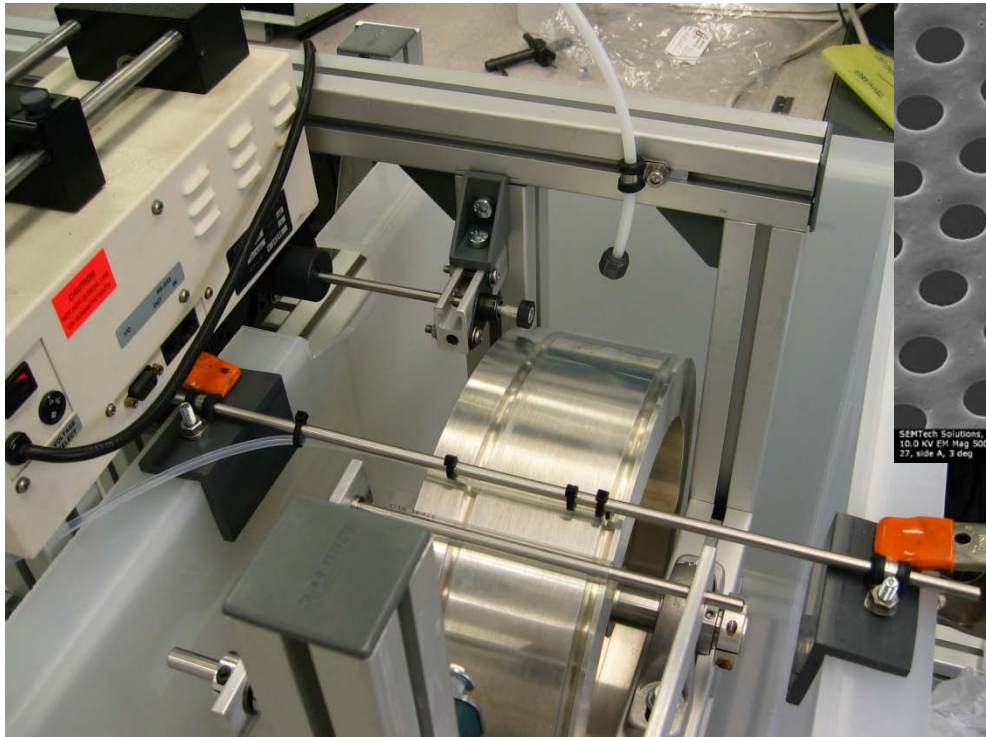

In Separate DOE Project
 Developing Low-Cost Casting
 Technique

(DE-FG02-05ER84322)

PI: Han Liu


- Automatic solution dispensing**
- Automatic speed control**
- Manual support collection**
- Solution recycling can be implemented**

OVERVIEW

- OBJECTIVES
- APPROACH and ACCOMPLISHMENTS
 - Rationale
 - Two Dimensionally Stable Membranes™
 - Three Dimensionally Stable Membrane™
- CHALLENGES

APPROACH: 3DSM™

- Cost of laser drilling prohibitively high
- three-dimensional supports commercially available
- Using conventional PFSA ionomers to meet cost targets
- Synthesizing new low-EW ionomers to meet performance targets
 - *Work being done by Israel Cabasso's Group at SUNY Syracuse Polymer Research Institute*

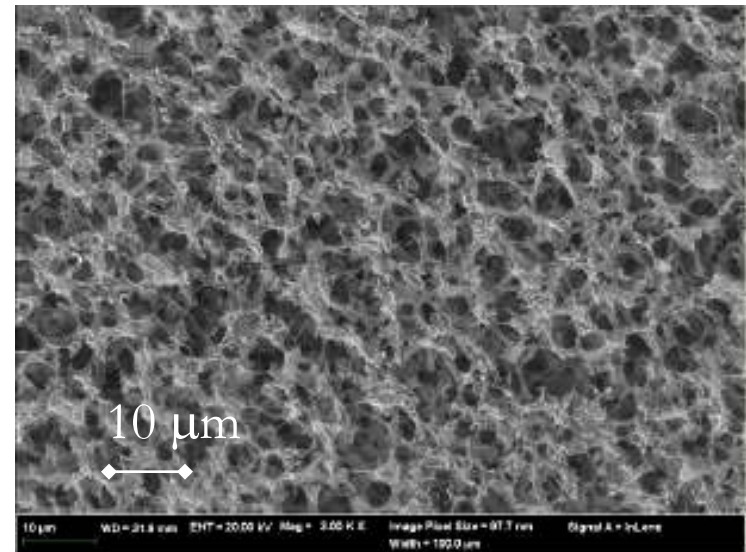



APPROACH: FOCUS OF PAST YEAR

- THINNER!
- Demonstrate Mechanical Durability Through RH Cycling
- Larger, More Consistent Membranes.
- Leave MEA/Fuel Cell Performance to Florida Solar Energy Center

ACCOMPLISHMENTS: 3DSMTM

-Previous results with 3-mil membrane


- Filled supports with commercial PFSA material
- Swelling is comparable to 2DSM
- Completely filling support was a major challenge
- ~33% conductivity penalty

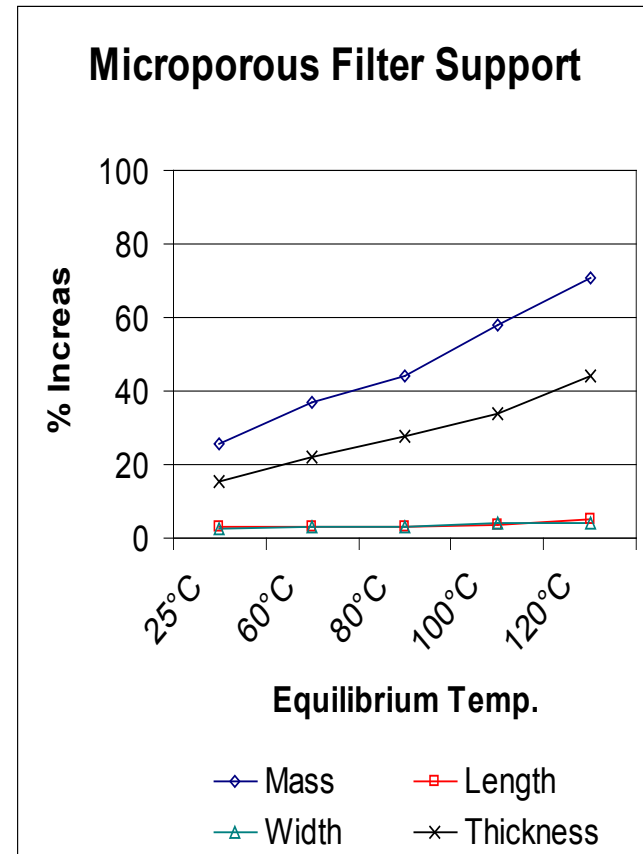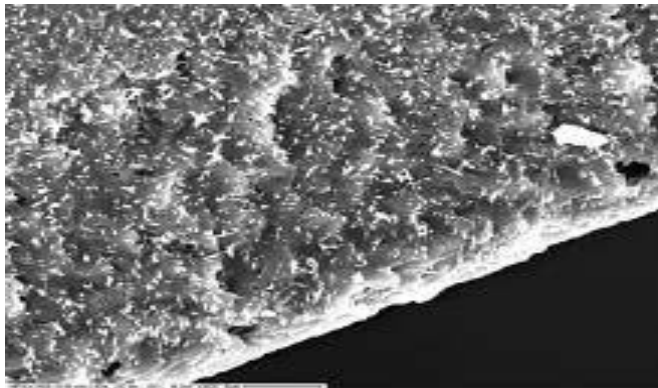

ACCOMPLISHMENTS: 3DSM™


Current Results with 1-mil membrane

- Custom membrane from Millipore
- Swelling is comparable to thick membrane
- Completely filling support was a major challenge
- Consistency through the plane was a challenge
- ~25% conductivity penalty

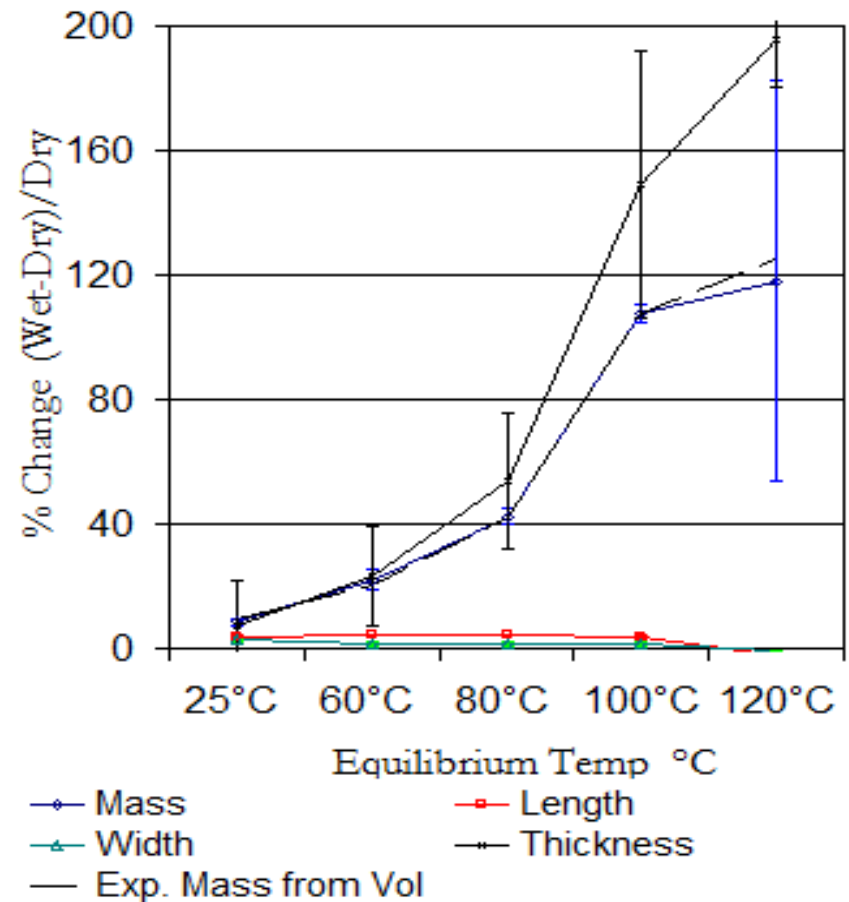

ACCOMPLISHMENTS: 3DSM™


RH Cycling Results

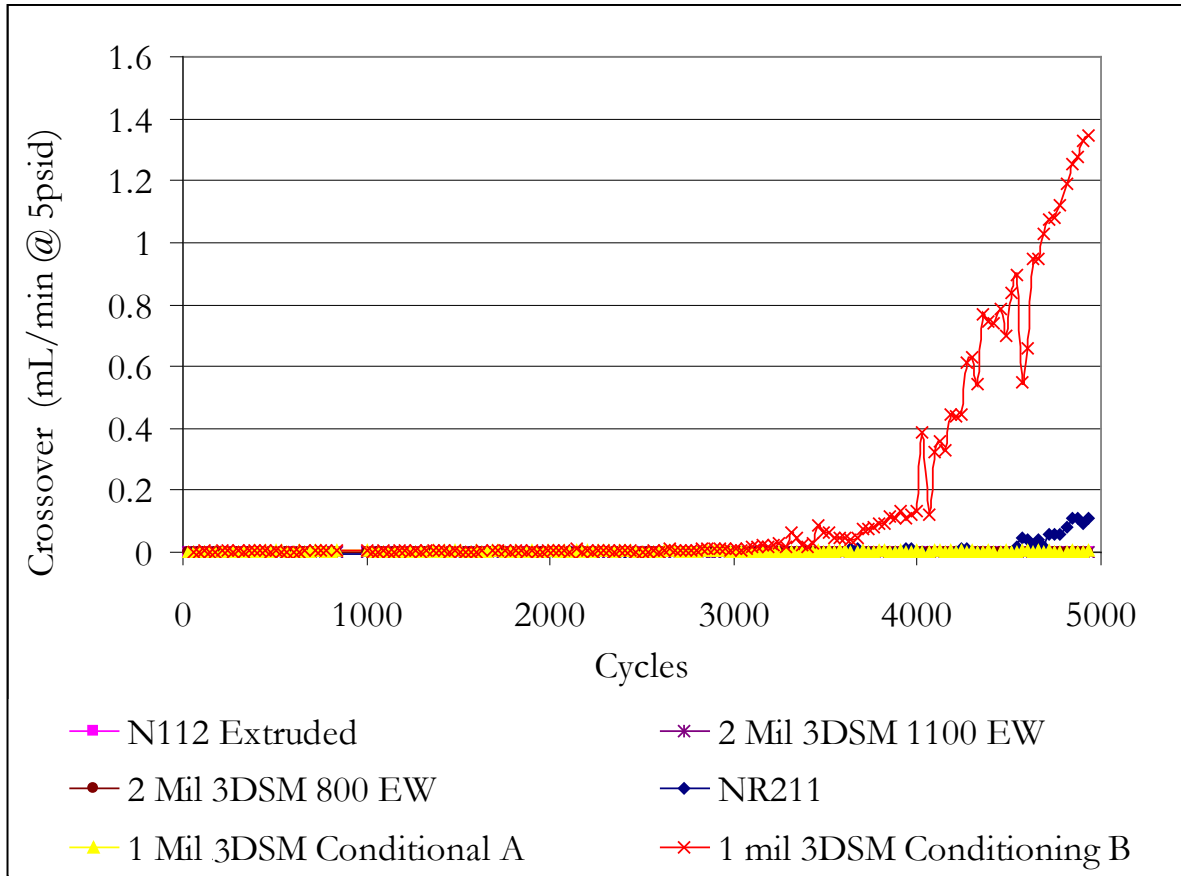

RH Cycling durability dependent on processing. 5000 Cycles demonstrated with 1-mil membrane.

ACCOMPLISHMENTS: 3DSM™

Conductivity at 80°C

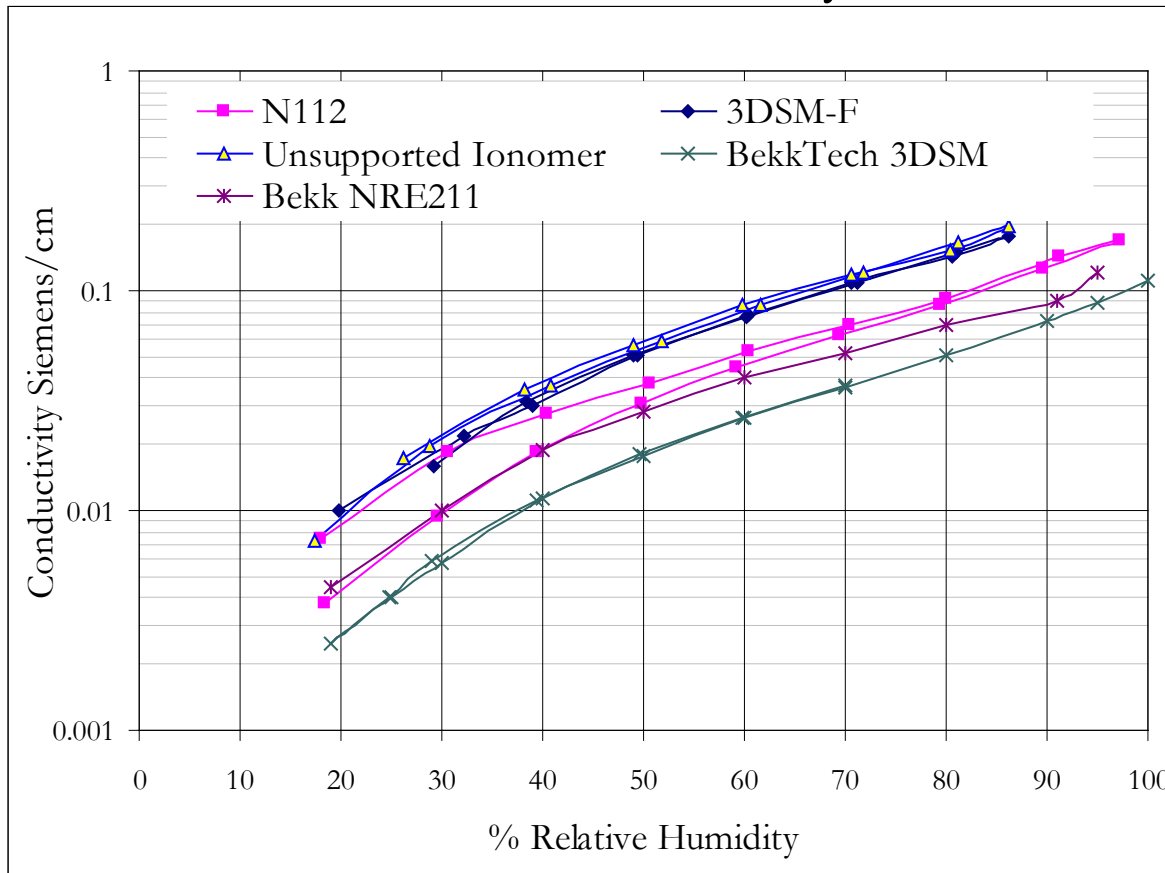


Discrepancy between Bekktech and GES data may have been pretreatment, washing of solvent

Have not yet matched best 2DSM data, but have not yet found a way to incorporate lowest EW PFSA in supports

ACCOMPLISHMENTS: 3DSM™

Alternative Synthesis: Homopolymer

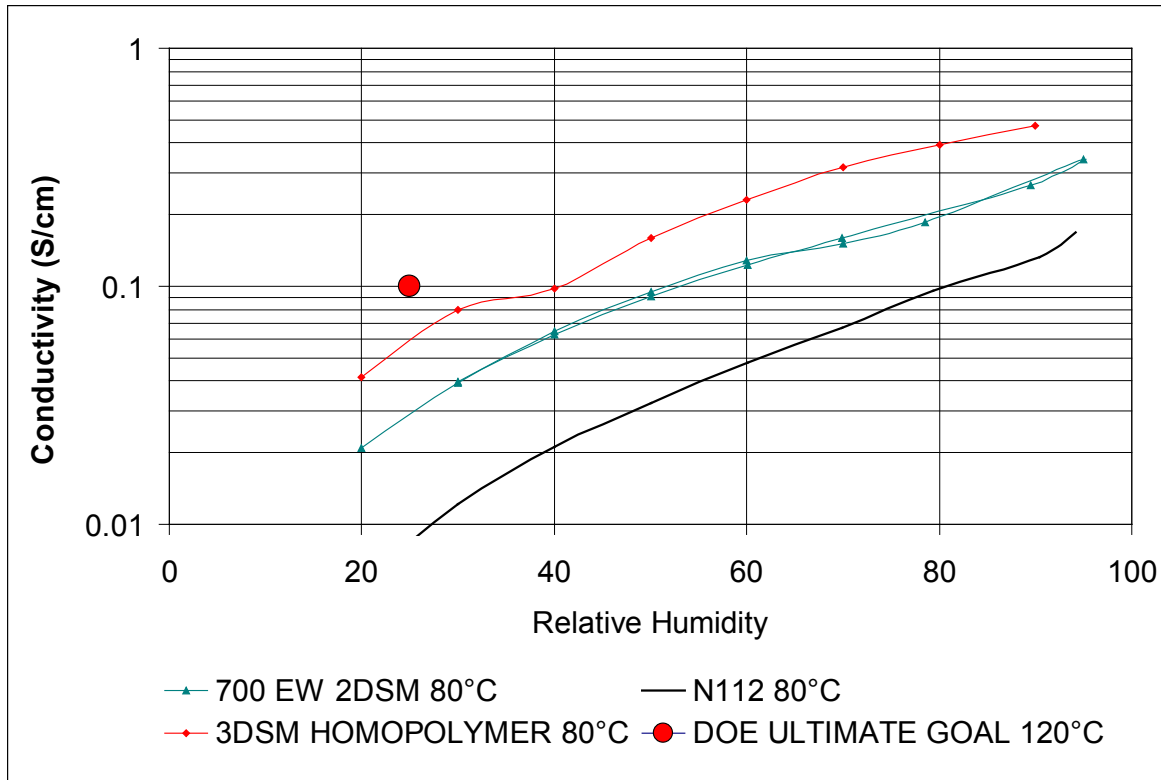

Synthesis of new PFSA Monomers
Working with SUNY-ESF to make
new copolymers and homopolymer




+ ?

Three non-PTFE copolymers
successfully synthesized. EW
from 500-1300.

Getting closer to DOE target! This polymer is water soluble is DOE target reachable?

ACCOMPLISHMENTS: 3DSM™


New Insoluble low EW PFSA

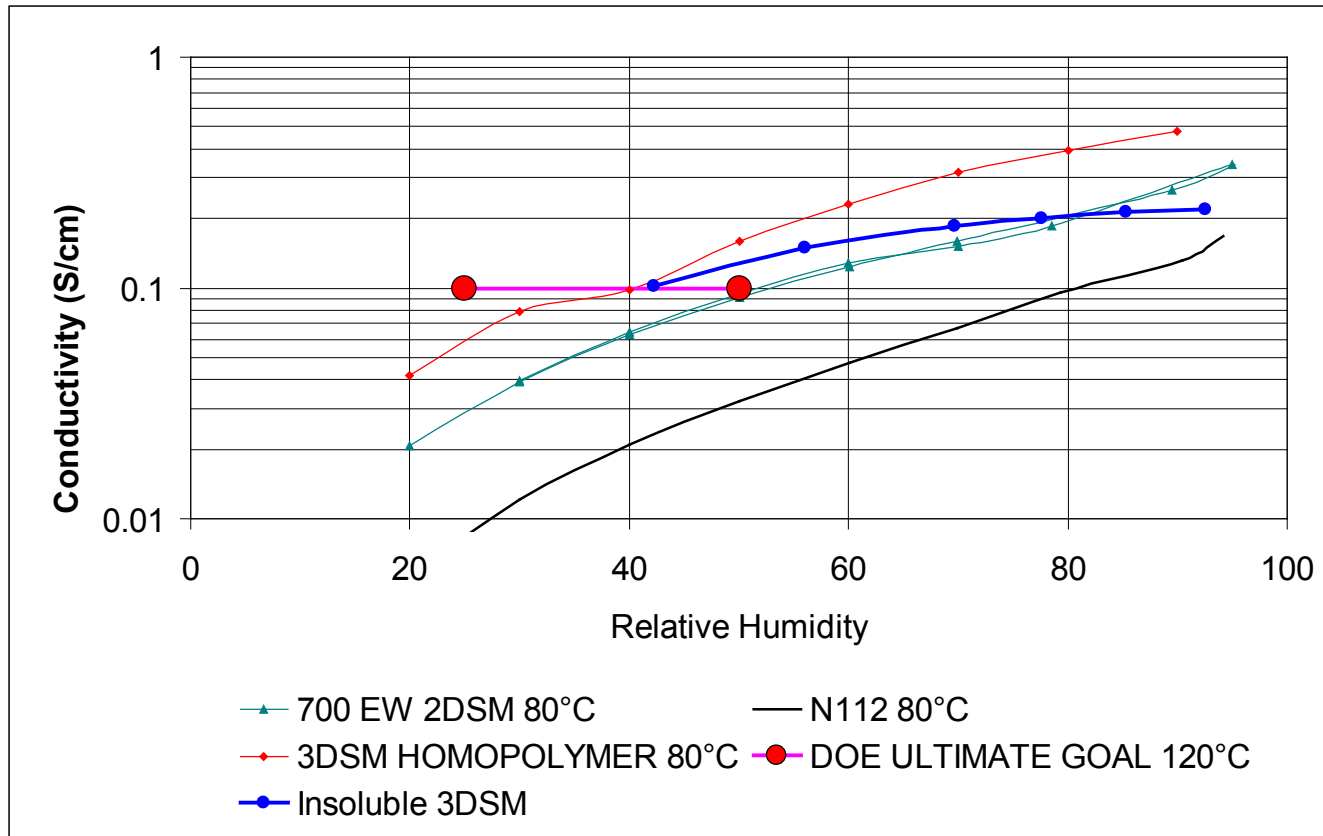

Last year successfully generated an insoluble highly conductive polymer, but have had difficult making large, supported films and MEAs

ACCOMPLISHMENTS: 3DSM™


Florida Solar Energy Center Testing

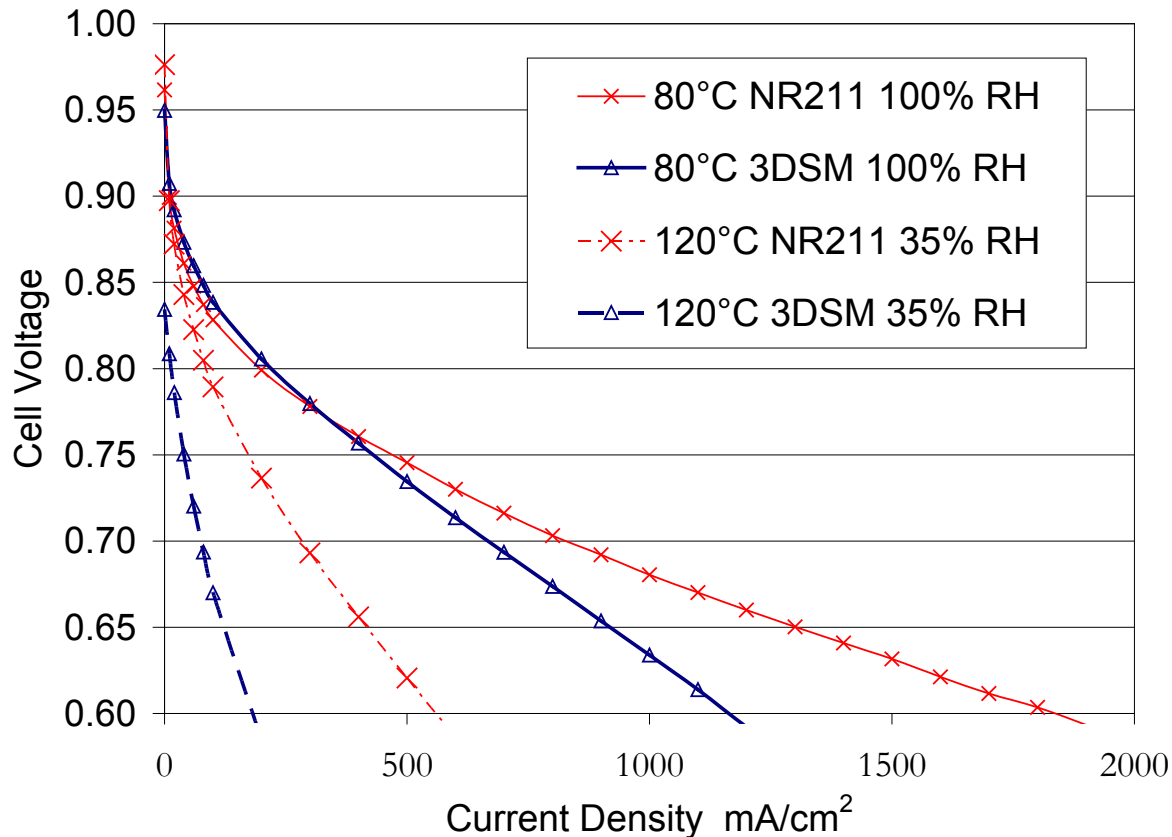

Poor performance is seen for the 3DSM™ MEA, however 1100 EW ionomer used in the catalyst layer.

ACCOMPLISHMENTS: 2DSM™

Fuel Cell Performance 95°C

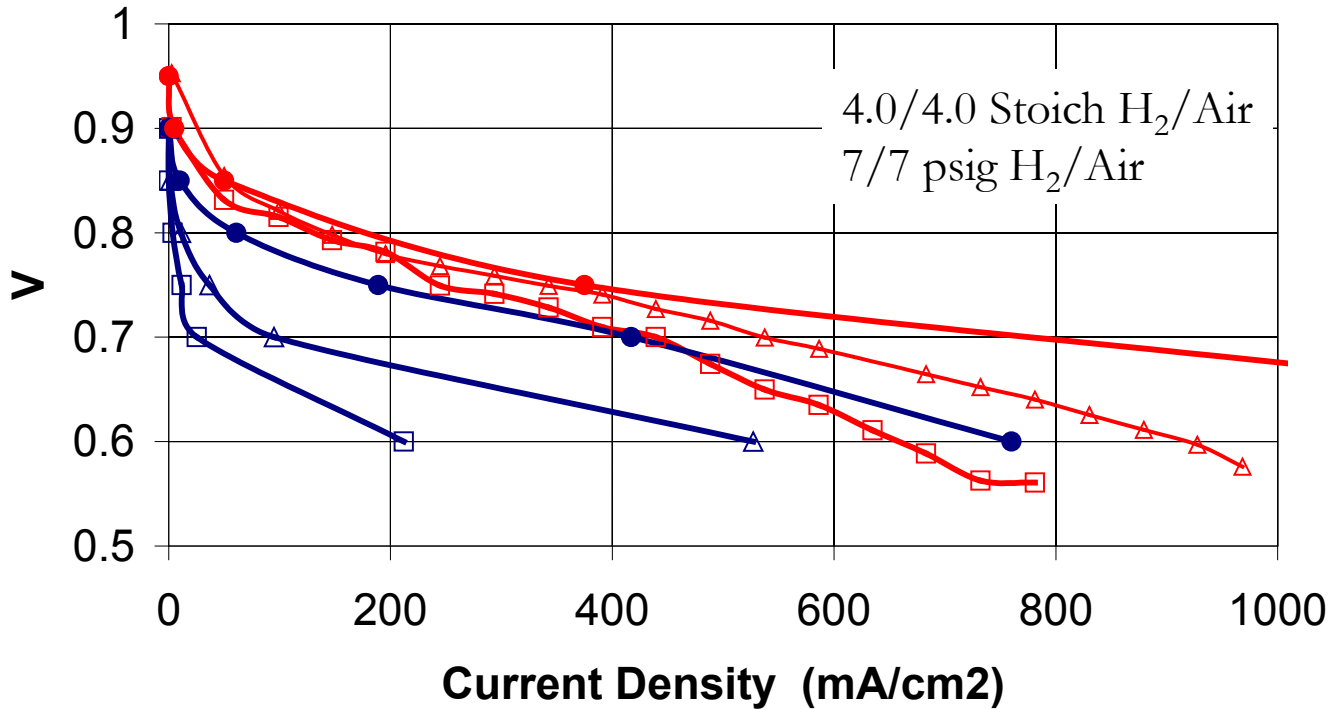


- 700 EW Supported 25% RH
- ▲ 700 EW Supported 50% RH
- 700 EW Supported 100% RH
- 700 EW DSM 25% RH II
- ▲ 700 EW DSM 50% RH II
- 700 EW 2DSM 100% RH II

Reformulating the catalyst layer with same ionomer led to large improvement in performance

ACCOMPLISHMENTS: 3DSM™

Electrolyzer Testing

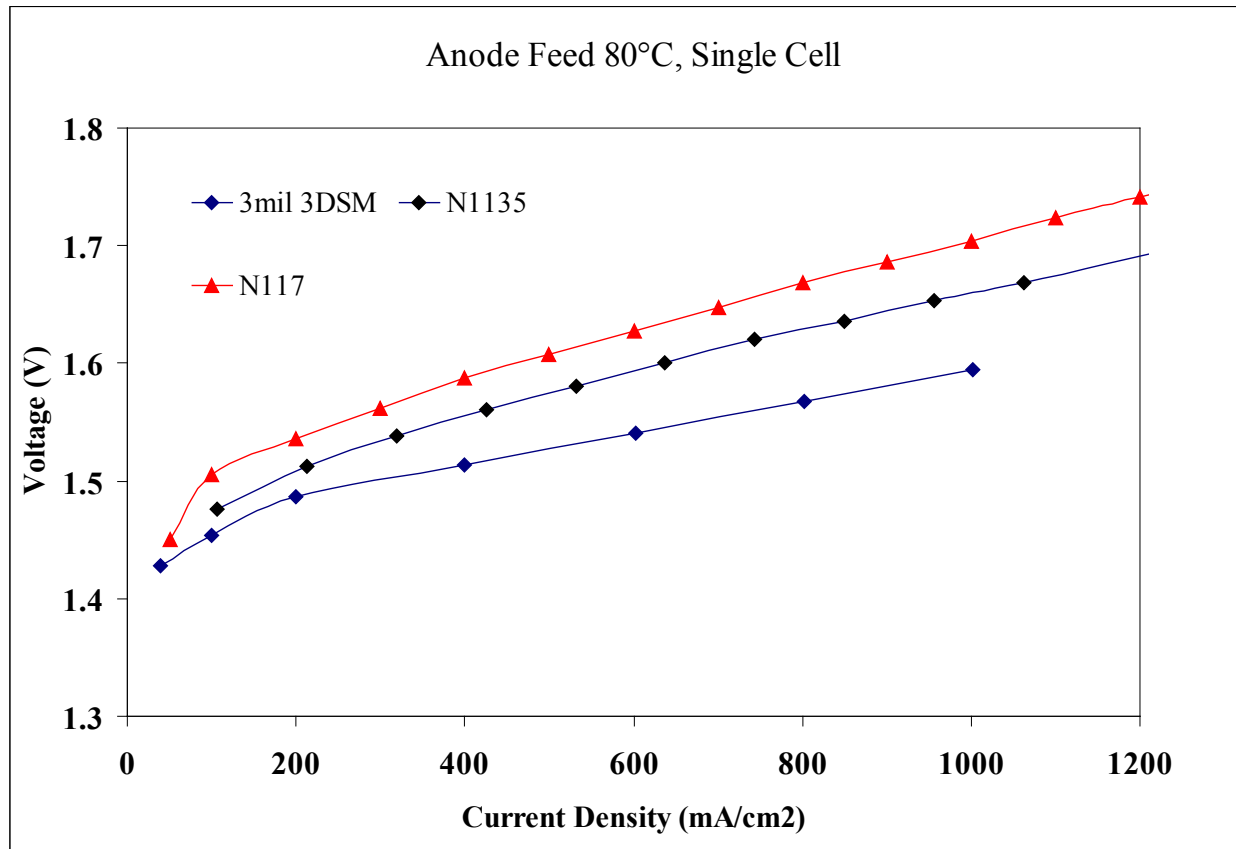

3DSM shows significant improvement to 1100 EW of comparable thickness

OVERVIEW

- OBJECTIVES
- APPROACH and ACCOMPLISHMENTS
 - Rationale
 - Two Dimensionally Stable Membranes™
 - Three Dimensionally Stable Membrane™
- CHALLENGES

Challenges: 3DSM

- Incorporate lower EW ionomers into support
- Demonstrate improved fuel cell performance
- *This will be the focus for the last year of the program*
 - *Catalyst layer improvement*
 - *RH cycling of thinner membranes*
 - *Short Stack Testing*

SUMMARY

- Year 1 Milestones Achieved
 - DSMs with a wide range of pore size and thickness restrain x-y swelling
 - Polyimide and polysulfone both shown to be effective supports
 - Effective methods of generating new PFSA polymers have been generated
- Year 2 Milestones Achieved
 - Conductivity targets have been met
 - Discrepancy between Bekktech and GES results
 - Fuel Cell Performance Improvements Shown
 - Electrode Improvements
- Durability demonstrated through RH cycling
- Realistic Pathways for Meeting Cost Targets Seen for both Paths.
 - Millipore estimates \$10/m² for support and processing.
 - Toll-coaters contacted and adding PFSA to membrane is ¢/m²
 - Key question is cost of PFSA
- To reach ultimate DOE Goals we will need to continue improving the low EW materials that have been developed at SUNY

OBJECTIVES: Ultimate Goal

Meet performance targets with film that can be generated in roll at DOE cost targets

