

Hydrogen Safety Training for Researchers and Technical Personnel

**Salvador Aceves, Francisco Espinosa,
Guillaume Petitpas, Tim Ross,
Vernon Switzer**

Lawrence Livermore National Laboratory

May 11, 2011

**Project ID #
SCS017**

This presentation does not contain any proprietary, confidential, or otherwise restricted information



Overview

Timeline

- Start date: **October 2007**
- End date: **Sept. 2013**
- Percent complete: **60%**

Budget

- Total project funding
 - DOE: **\$550k**
- Funding for FY10:
 - **\$50k**
- Funding for FY11:
 - **\$150k**

Barriers

- **H. Lack of H₂ knowledge**
- **I. Lack of H₂ training facilities**

Partners

- **Detailed class peer review in collaboration with Hydrogen Safety Panel and Lab Safety Managers**



Relevance: Appropriate H₂ safety instruction is key to avoiding accidents




- **Laboratory researchers handling small amount of hydrogen need basic information on pressure, cryogenics, flammability, asphyxiation, and other risks and precautions for using hydrogen**



- **Technical personnel in charge of operations need comprehensive instruction on components, system design, assembly, and leak testing**



Approach: minimize risk of accidents & maximize productivity through improved knowledge of H₂ properties and procedures

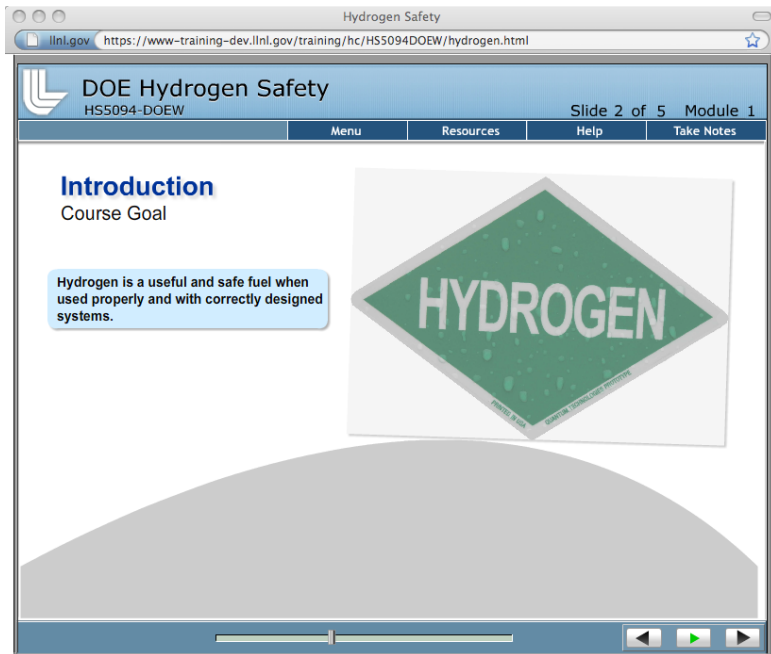

The screenshot shows a web browser window displaying a slide from a DOE Hydrogen Safety course. The slide title is "DOE Hydrogen Safety" with the course ID "HS5094-DOEW". It is identified as "Slide 2 of 5" in "Module 1". The slide content includes a "Course Goal" section with the text: "Hydrogen is a useful and safe fuel when used properly and with correctly designed systems." To the right of this text is a green diamond-shaped hazard label with the word "HYDROGEN" in white capital letters. The slide also features a navigation menu with "Menu", "Resources", "Help", and "Take Notes" options, and a progress bar at the bottom.

- **Web-based class** (4 hours) developed for laboratory researchers handling hydrogen




- **Hands-on safety class** (3 days) developed for technical personnel in charge of designing, assembling, and testing H₂ systems




Accomplishments: we have produced and peer reviewed a web-based hydrogen safety class for researchers

- Four hours long
- Six modules:
 - Introduction
 - Hydrogen properties
 - Pressure safety
 - Cryogenic safety
 - Emergency response
 - Codes and standards
- End of module quizzes (passing grade 85%)
- Web address: www.h2labsafety.org

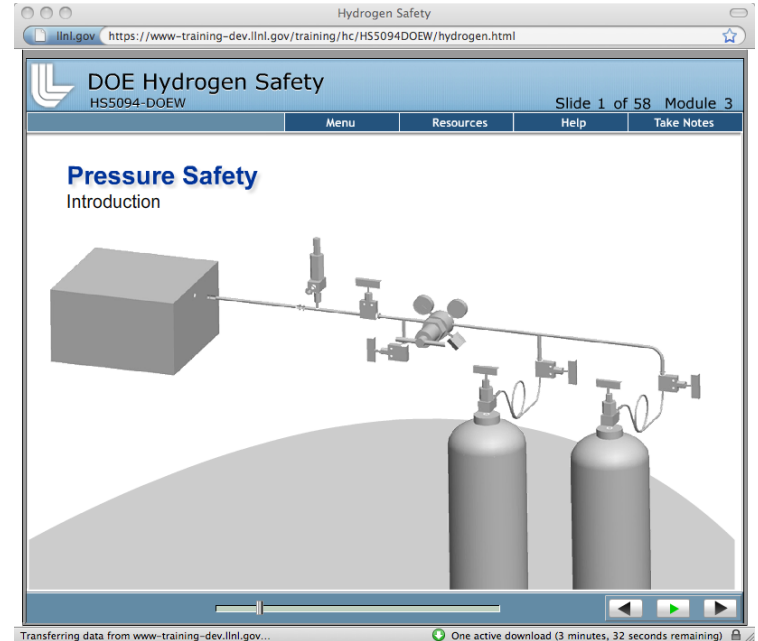

We have registered ~100 class completions during the year, but face declining number of monthly completions

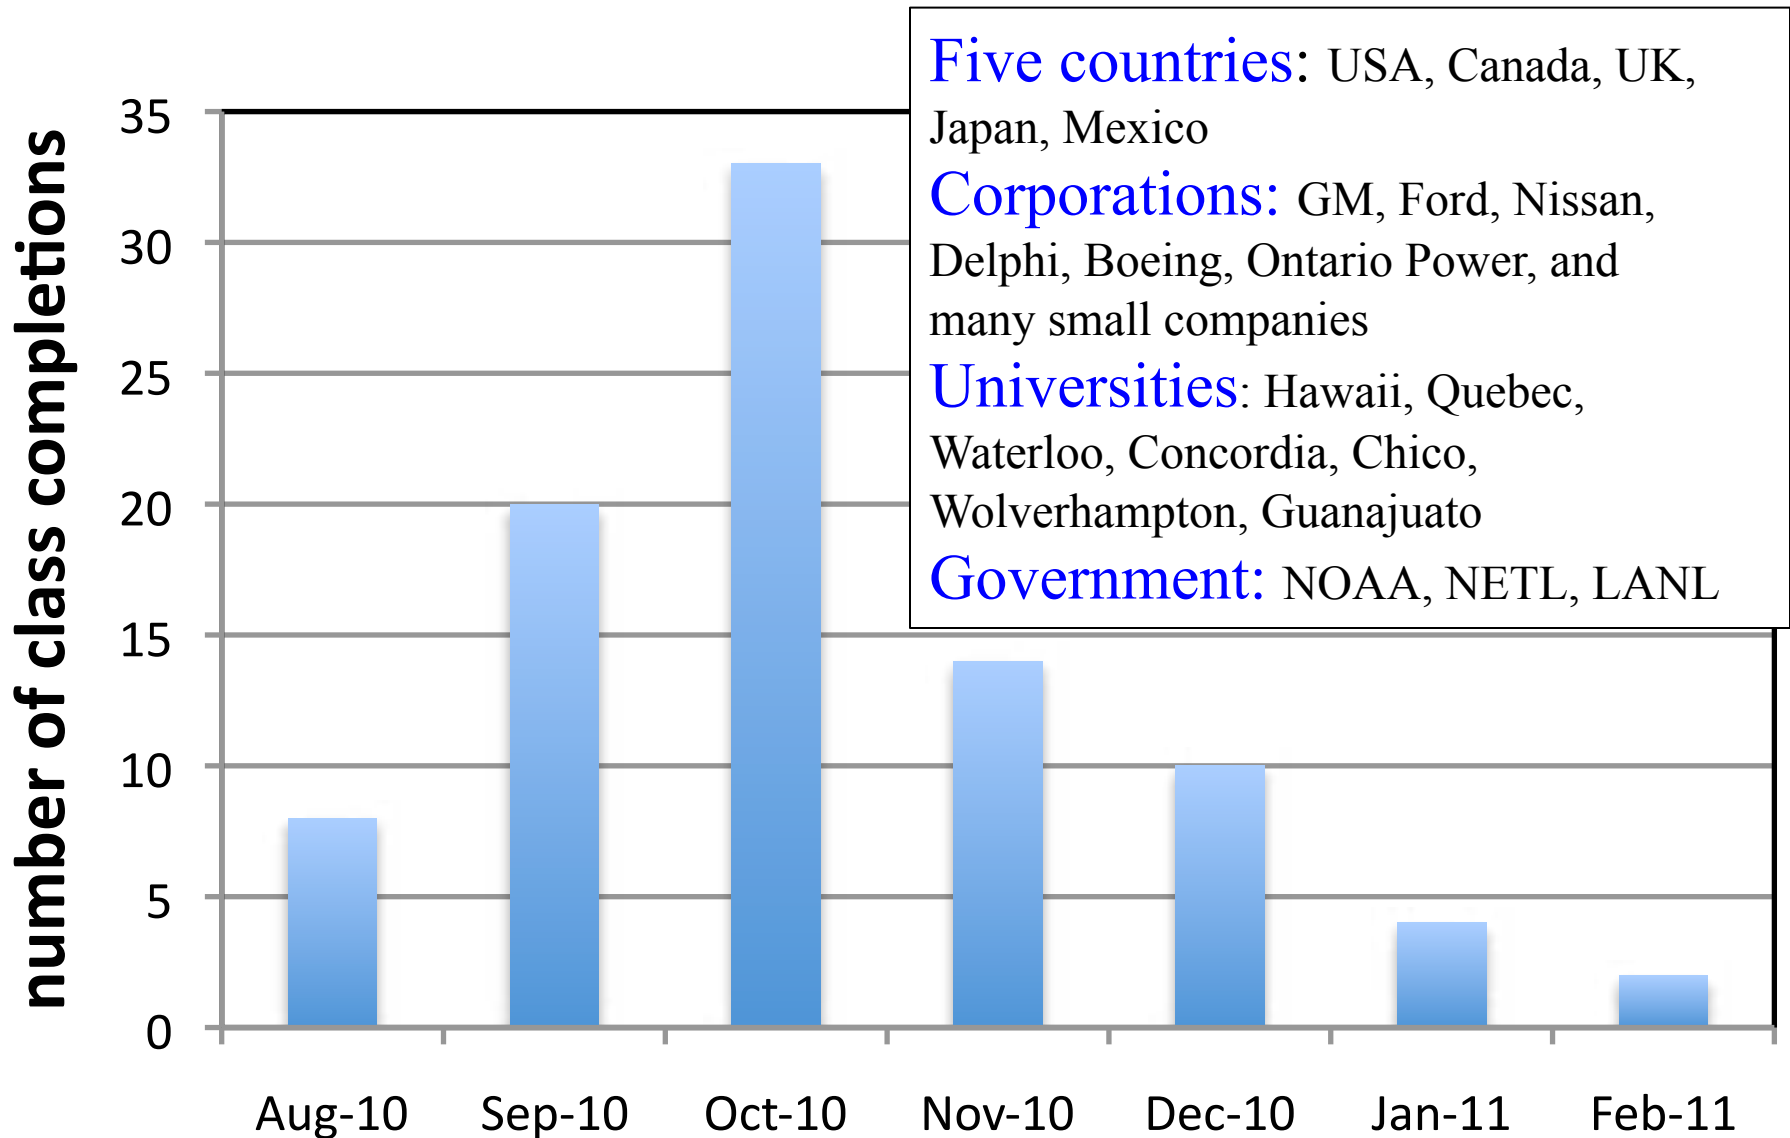

We are developing 3-day hands-on hydrogen safety class



Working board



pressure vessels



regulator



Relief device



pressure gauge



CGA fitting



First day: Classroom discussion on detailed component characteristics

- 1. Definitions**
- 2. Hazards**
- 3. Personal Protective Equipment (PPE)**
- 4. Gas Cylinders**
- 5. Gas Cylinder Manifold**
- 6. Pressure Reducing Regulators**
- 7. Gauges/Pressure Transducers**
- 8. Regulator Safety Manifold**
- 9. Relief Devices**
- 10. Valves**
- 11. Fittings**
- 12. Tubing and Piping**
- 13. Flash Arrestors**
- 14. Quiz**



First day: Classroom discussion on detailed component characteristics

1. Definitions
2. Hazards
3. Personal Protective Equipment (PPE)
4. Gas Cylinders
5. Gas Cylinder Manifold
6. Pressure Reducing Regulators
7. Gauges/Pressure Transducers
8. Regulator Safety Manifold
9. Relief Devices
10. Valves
11. Fittings
12. Tubing and Piping
13. Flash Arrestors
14. Quiz

Example:
class materials for
pressure reducing
regulators



Pressure Reducing Regulators

- Regulator Types
 - Single stage
 - Two-stage
 - Back pressure
 - Dome loaded




Pressure Reducing Regulators

- Single Stage Regulator


Two Typical Applications:

- High Pressure
 - Manifold Regulator
 - High Flows
- Low Pressure
 - Line Station Regulator
 - Low Flows

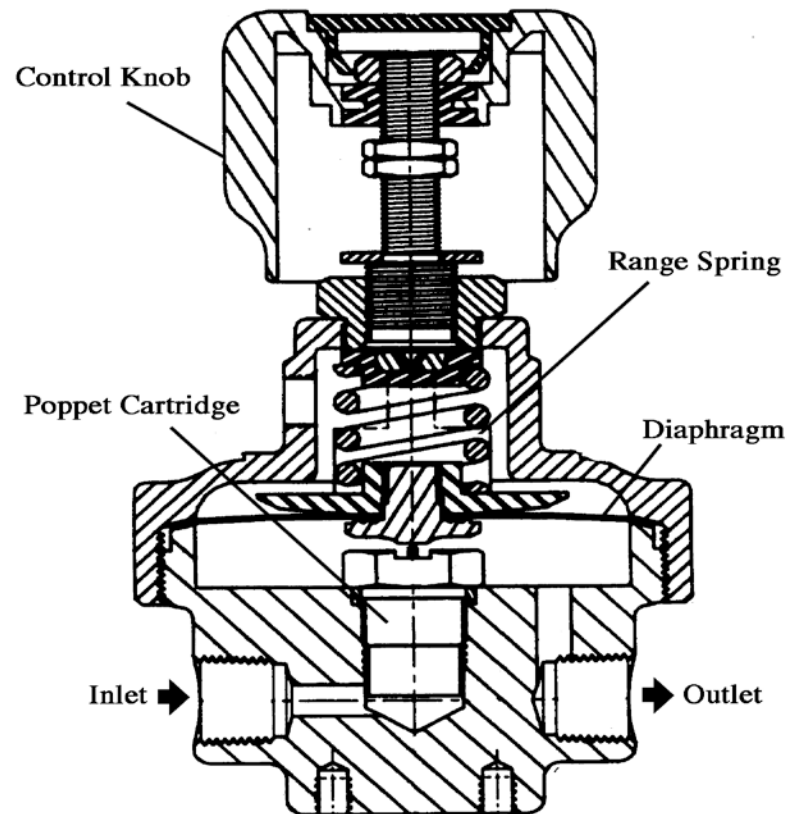

Pressure Reducing Regulators

SINGLE STAGE REGULATOR
WITH SELF-RELIEVING OPTION

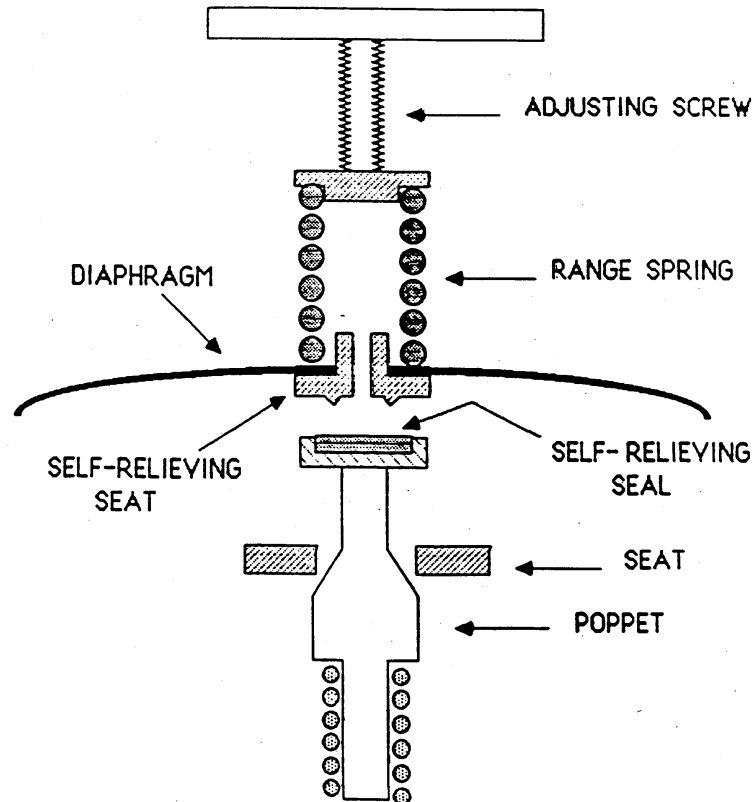


Pressure Reducing Regulators

- Two Stage Regulator

Applications:

- Precise Control
- Lower Pressures
- Lower Flows
- Minimal Supply Pressure Effect

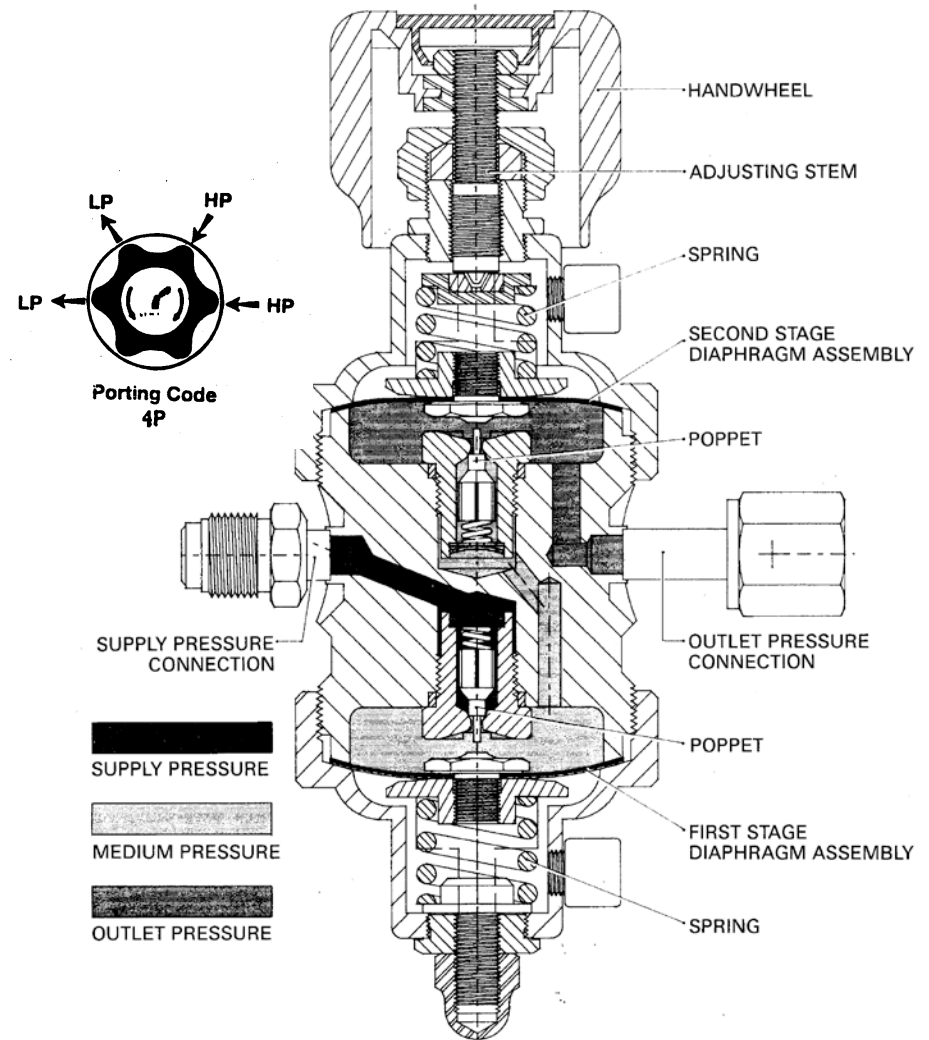


Pressure Reducing Regulators


- Back Pressure Regulator

Applications:

- Controlling Pump Pressures
- Fluid Sampling
- Industrial Controls
- Adjustable Relief for Test Consoles



VESSEL MOUNTED

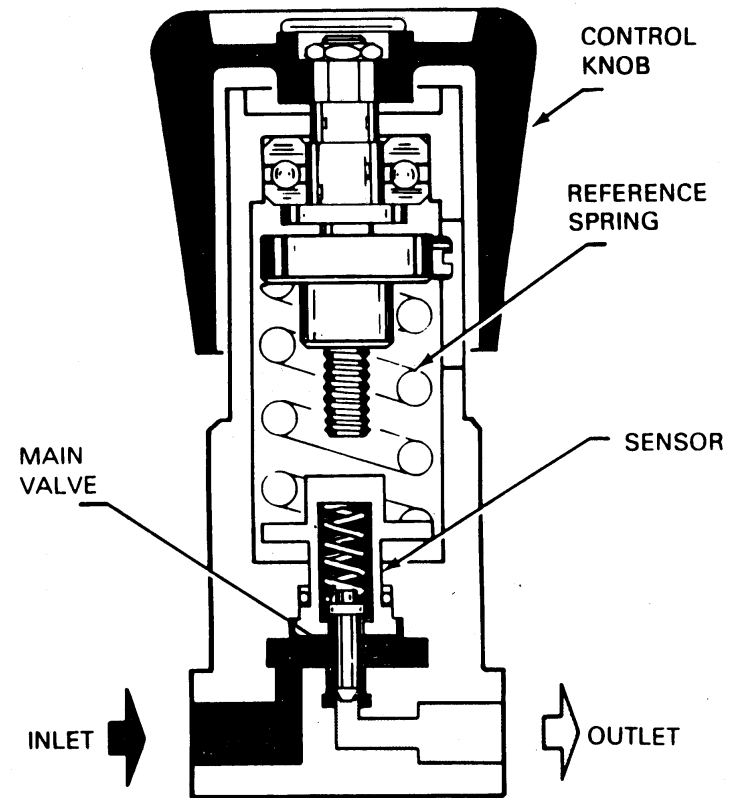

FUNCTIONAL SCHEMATIC




Pressure Reducing Regulators


- Dome Loaded Regulator

Applications:

- High Pressure
- High Flow Purge
- Manifold Regulator
- Test Consoles



LOADING DOME

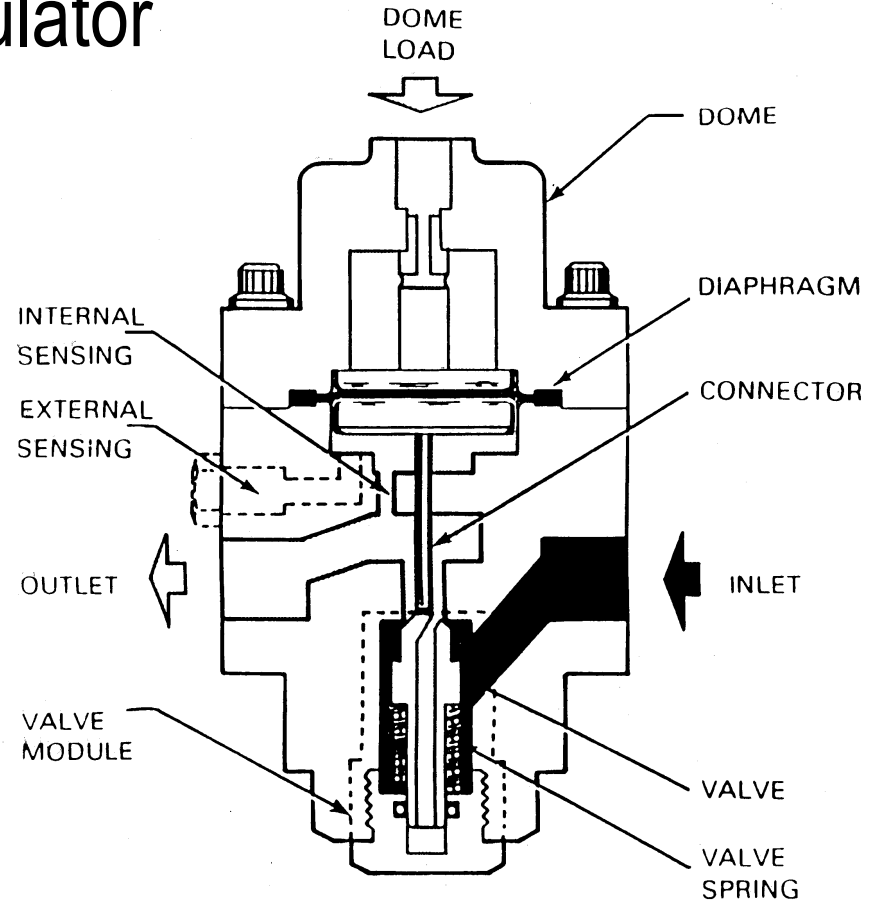

Pressure Reducing Regulators

Cylinder Connection Listing

Gas	CGA Valve Outlet & Conn. No.	Gas	CGA Valve Outlet & Conn. No.	Gas	CGA Valve Outlet & Conn. No.	Gas	CGA Valve Outlet & Conn. No.
Acetylene	510	2-2 Dimethylpropane	510	Halocarbon 1113	510	Nitrogen-6000 psig	677
Air, Breathing	346	Ethane	350*	(Chlorodifluoroethylene	510	Nitrogen Dioxide	660
Air, Industrial	590*	Ethyl Chloride	300*	Helium-3500 psig	680***	Nitrogen Trioxide	660
Allene	510**	Ethylene	350*	Helium	580*	Nitrous Oxide	320*
Ammonia, Anhydrous	705†	Ethylene Oxide	510†	Hexafluoropropylene	660*	Octafluorocyclobutane	660*
Ammonia, Electronic	660	Fluorine	678	Hydrogen	330*	Oxygen	540*
Argon	580*	Germane	350	Hydrogen-3500 psig	695***	Oxygen Mixtures	540*
Argon-3500 psig	680***	Halocarbon 12	660*	Hydrogen Bromide	330†	Over 23%	296
Argon-6000 psig	677	(Dichlorodifluoromethane)	660*	Hydrogen Chloride	330**	Perfluoropropane	660*
Arsine	350/	Halocarbon 13	660	Hydrogen Fluoride	660†	Phosgene	660
Boron Trichloride	632	(Chlorotrifluoromethane)	660	Hydrogen Iodide	330†	Phosphine	350/
Boron Trifluoride	660†	Halocarbon 13B1	660	Hydrogen Selenide	330	Propylene	632
1-3 Butadiene	330†	(Bromotrifluoromethane)	660	Hydrogen Sulfide	330**	Phosphorus Pentafluoride	660†
Butane	510*	Halocarbon 14	660	Isobutane	510*	Propane	510*
Butenes	510*	(Tetrafluoromethane)	320*	Isobutylene	510*	Propylene	510*
Carbon Dioxide	320*	(Chlorodifluoromethane)	660*	Krypton	580	Silane (High Pressure)	350/
Carbon Monoxide	350*	Halocarbon 23	660	Manufactured Gas B*	350	Silicon Tetrafluoride	632
Carbonyl Fluoride	660	(Fluorocloromethane)	660	Methane	330	Sulfur Dioxide	660**
Carbonyl Sulfide	330†	Halocarbon 114	660	Methyl Bromide	330	Sulfur Hexafluoride	590*
Chlorine	660**	(2,2	660*	3-Methyl Butane-1	660*	Sulfur Tetrafluoride	330†
Cyanogen	660	Dichlorotetrafluoroethane)	660*	Methyl Fluoride	330	Trimethylamine	705†
Cyanogen Chloride	660	Halocarbon 115	660	Methyl Mercaptan	330**	Vinyl Bromide	510
Cyclopropane	510*	(Chloropentafluoroethane)	660*	Monomethylamine	705†	Vinyl Methyl Ether	510
Deuterium	350*	Halocarbon 116	660	Neon	580*	Xenon	580**
Dichlorosilane	678	(Hexafluoroethane)	660	Nitric Oxide	660		
Dimethylamine	705†	Halocarbon 142B	510	Nitrogen	580*		
Dimethyl Ether	510*	(Chloro-1,1-Difluoroethane)	510	Nitrogen-3500 psig	680***		

*Lecture bottles use CGA No. 170

†Lecture bottles use CGA No. 180

**Lecture bottles use CGA No. 111

All drawings are arranged in numerical order according to the valve connection number. The accurate diameter of the valve outlet is given below each drawing along with the thread designation. For ease of measurement and identification, approximate fractional dimensions may be found on each drawing.


The left hand portion of each drawing marked "OUTLET" represents the cylinder valve, while the right hand portion marked "CONNECTION" represents the mating connection normally found in regulators, control valves, and manifolds.




CONNECTION 110
LECTURE BOTTLE OUTLET—CORROSIVE GASES
5/16"-32 RH INT. using Flat Seal with Washer




CONNECTION 170
LECTURE BOTTLE OUTLET—NON-CORROSIVE GASES
9/16"-18 RH EXT. and 5/16"-32 RH INT. using Flat Seal with Washer



CONNECTION 180
LECTURE BOTTLE OUTLET—CORROSIVE GASES
5/8"-18 RH EXT. and 5/16"-32 RH INT. using Flat Seal with Washer



CONNECTION 290
.745"-14 LH EXT. accepting a Bullet Shaped Nipple




CONNECTION 296
.803"-14 RH INT. accepting a Bullet Shaped Nipple


Cylinder Connection Listing




CONNECTION 320
.825"-14 RH EXT. used with Flat Seat and Washer




CONNECTION 326
.825"-14 RH EXT. accepting a Round Shaped Nipple




CONNECTION 330
.825"-14 LH EXT. used with Flat Seal and Washer




CONNECTION 350
.825"-14 LH EXT. accepting a Round Shaped Nipple



CONNECTION 510
.885"-14 LH INT. accepting a Bullet Shaped Nipple



CONNECTION 540
.903"-14 RH EXT. accepting a Round Shaped Nipple




CONNECTION 580
.965"-14 RH INT. accepting a Bullet Shaped Nipple



CONNECTION 590
.965"-14 LH INT. accepting a Bullet Shaped Nipple




CONNECTION 632
1.033"-14 NGO RH EXT. With Washer and Wire Clip.




CONNECTION 660
1.030"-14 RH EXT. using Flat Seal with Washer




CONNECTION 677
1.030"-14 LH EXT. accepting a Round Shaped Nipple



CONNECTION 678
1.030"-14 LH EXT. (Short Nipple) using Flat Seal with Washer



CONNECTION 679
1.030"-14 LH EXT. using Small Flat Seal with Washer



CONNECTION 705
1.125"-14 RH INT. Flat Seal with Washer



Pressure Reducing Regulators

- Cylinder Relief Devices

- Type:


- Spring loaded
 - Frangible disc
 - Fusible plug
 - Frangible disk backed by fusible metal
 - No relief device

- Use:


- propane, mapp gas
 - CO₂, N₂, O₂, argon, He
 - acetylene, chlorine
 - hydrogen, methane
 - arsine, fluorine, phosgene

Types of Cylinder Valves

These valves and their subcomponents come in various materials to resist the corrosive properties of various gases.

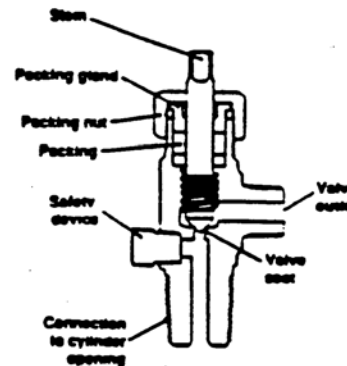

Packed valve

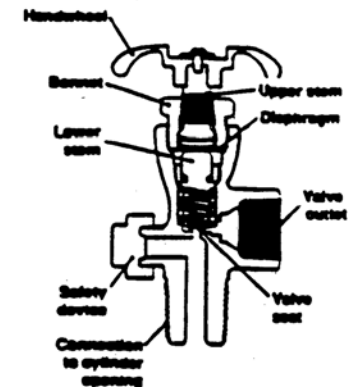

Packless diaphragm valve




Pressure Reducing Regulators

- Compressed Gas Cylinder Handling
 - DOT cylinder identification
 - *,+, Hydro test date
 - Cylinder status tag
 - Use proper discharge controls
 - Keep cylinders away from heat

Important Features Common to Gas Cylinders

1. Valve: (a) handwheel, (b) CGA outlet connection (c) pressure relief device
2. Valve outlet cap
3. Cylinder collar
4. DOT specification (3AA) and service pressure (2265 psig)
5. Serial number
6. Manufacturer's symbol
7. Test date (3/82), original tester's symbol (), hydrostatic retesting extension allowance (*), and permission to overpressure by 10%→
8. Cylinder cap

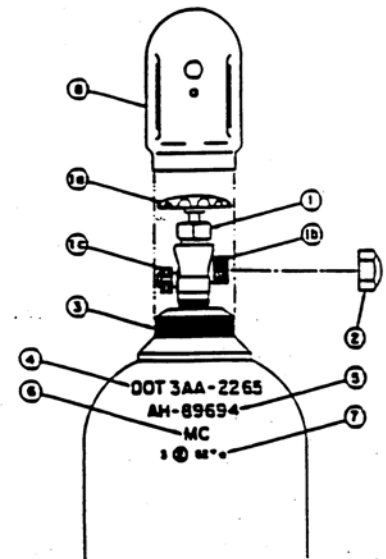

Pressure Reducing Regulators

- Always
 - Read the shoulder label on the cylinder, verify gas
 - Select the proper regulator for the gas being used
 - Secure the cylinder before installing the regulator
 - Inspect the cylinder valve and regulator for damage



Pressure Reducing Regulators

- Always (continued)
 - Make sure the cylinder valve and regulator connections are free of dirt, oil, grease, and foreign material
 - Close the regulator by turning the pressure control knob counterclockwise until the knob turns freely without tension before opening the cylinder valve
 - Open the cylinder valve slowly



Pressure Reducing Regulators

- Never
 - Use a damaged regulator
 - Adjust, remove, or plug relief devices
 - Change CGA or inlet connection
 - Lubricate any part of the regulator or cylinder valve



Pressure Reducing Regulators

- Never (continued)
 - Force threaded connections
 - Stand in front of the regulator while opening the cylinder valve
 - Attempt to perform any type of repair to the regulators, consult an authorized repair shop



Pressure Reducing Regulators

- Glossary
 - Droop
 - This is the amount of outlet pressure decrease with respect to increasing flow demand on a pressure reducing regulator. It can be expressed in percentage change of the set point or can be shown as pounds per square inch change with respect to flow increases
 - Lockup
 - This is the amount of outlet pressure increase beyond the set pressure with respect to decreasing flow demand on a pressure reducing regulator.
 - Critical Flow
 - This is also sometimes referred to as sonic flow and is the maximum flow which can pass through a regulator or an orifice



Pressure Reducing Regulators

- Glossary (continued)
 - Creep
 - This is an increase in outlet pressure occurring after lockup. Creep normally appears as a gradual rise in outlet pressure over a period of time. The usual cause of creep is contamination in the regulator seat causing the regulator to remain slightly open henceforth additional outlet pressure.
 - Bubble Tight Shutoff
 - Determined by connecting the outlet of a regulator with a piece of tubing and submerging the end under an inch or two of water. With inlet pressure applied and the regulator in an off condition, there should not be any bubbles within a time period of one minute. This constitutes “Bubble Tight Shutoff”.
 - Set Point
 - This is the control point desired for operation of a regulator.




Pressure Reducing Regulators

- Glossary (continued)
 - CGA Fittings
 - Compressed Gas Association (CGA) is the group that has established standards in the gas industry for fittings which are used to attach to gas cylinders.
 - DIN Fittings
 - Deutsches Institut für Normung (DIN), English translation would be German Industrial Standard. The DIN system was developed by Germans and is used in Europe.
 - Coefficient of flow (C_v)
 - For a valve is the volume of water in U.S. gallons per minute at room temperature...which will flow through the valve with the stem fully open...with a pressure drop of 1 psi across the valve. C_v is the valve sizing factor that permits selection of the appropriate valve to meet the flow requirements of a given fluid system.




Second day: assemble pressure system described in engineering safety note

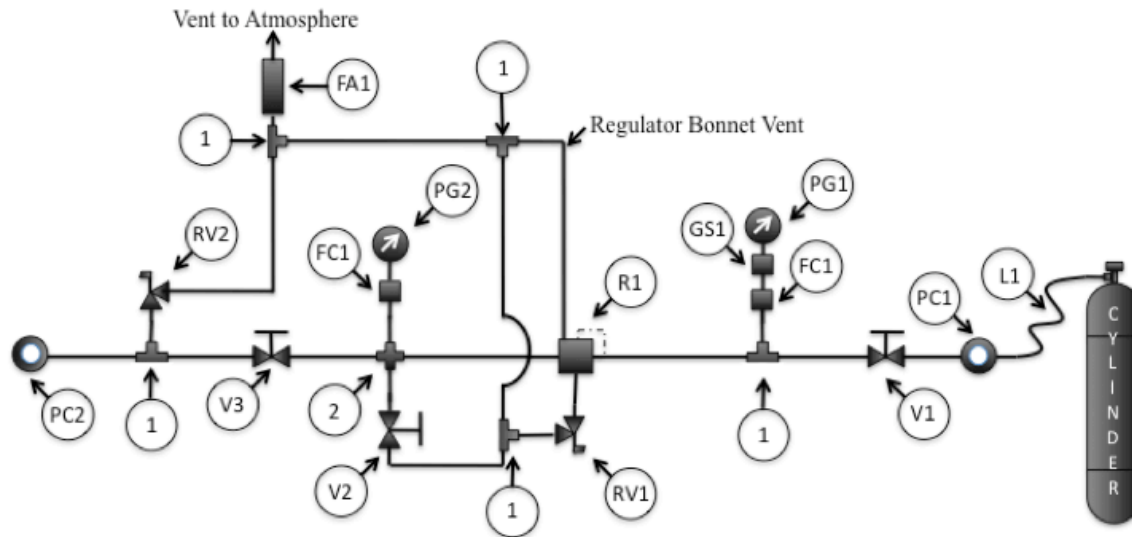


Line Item	Manufacturer	Description	Part #	M A W P
1	Swagelok	Tee Fitting Quarter Inch	SS-400-3	7000 PSIG
2	Swagelok	Union Cross	SS-400-4	7000 PSIG
PC1-PC2	Swagelok	Bulkhead Union	SS-400-61	7000 PSIG
PG1	Swagelok	Gauge 5000 PSIG	PGI-83C-PG5000-CAOX	5000 PSIG
PG2	Swagelok	Gauge 400 PSIG	PGI-83C-PG400-CAOX	400 PSIG
R1	Swagelok	Single Stage Regulator	KPR1GRH412E6000 0 Flow Coefficient .06	3600 IN 250 OUT PSIG
RV1	Swagelok	Relief Valve	KVV11DL1 Flow Coefficient .1	Set at 300 PSIG
RV2	Swagelok	Relief Valve	SS-4R3A Flow Coefficient .16	Set at 250 PSIG
V1	Swagelok	Needle Valve	SS-1VS4	5000 PSIG
V2-V3	Hoke	Needle Valve	D371264Y	5000 PSIG
GS1	Swagelok	Gauge Snubber	SS-4-SA-EG	6600 PSIG
FC1	Swagelok	Female Connector	SS-400-7-4	6600 PSIG
Misc	Swagelok	SS Tubing 1/4" X .049 Wall	Seamless	7000 PSIG
L1	Western Enterprises	350 CGA Pigtail 580 CGA Pigtail	PH83CV PH92CV	3000 PSIG
FA1	Matheson Tri-Gas	Flash Arrestor	6103A	50 PSIG



Second day: video illustrates planning, component installation, tube cutting and bending, compression fittings, and leak testing using mass spectrometer leak detector



Third day: video illustrates data acquisition setup, pressure test, leak test at MAWP, and system operation



Future work: maintain web-based class and complete hands-on class

- ***Maintain and continuously improve web-based class*** by collecting comments and suggestions and incorporating them into the class
- ***Complete preparation of hands-on class*** by developing student's workbooks, class notes, reference materials, and work tables.
- ***Peer review hands-on class*** by inviting members of the safety panel and other H₂ safety experts to review class materials, class activities, facilities, and teaching approach
- ***Teach hands-on class.*** We envision 3-day sessions with up to 6 students. Instruction at other institutions possible if appropriate facilities exist



Collaborations

- **Extensive peer review (two rounds of reviews and 40 pages of comments) conducted by the [Hydrogen Safety Panel](#) and the [Laboratory Safety Managers](#).**
- **We look forward to collaborating with the hydrogen community for continuously improving class materials**



Summary

- ***We are contributing to safe hydrogen operations*** by developing instructional materials for researchers and operators
- ***Web-based class*** (now complete) addresses the need of laboratory researchers handling small amounts of hydrogen www.h2labsafety.org
- ***Hands-on class*** (in process) will present in-depth information for technical personnel tasked with installing and testing hydrogen systems
- ***Participation from the hydrogen community*** will improve the class through suggestions, bug reports, etc.

