

Market Segmentation Analysis of Medium and Heavy Duty Trucks with a Fuel Cell Emphasis

Chad Hunter, Michael Penev, Evan Reznicek
National Renewable Energy Laboratory
May 31, 2020

DOE Hydrogen and Fuel Cells Program
2020 Annual Merit Review and Peer Evaluation Meeting

Project ID SA169

Overview:


Fuel Cell M/HD Vehicle Market Segmentation

Timeline	Barriers (4.5)
<p>Start: September, 2017 End: September, 2020</p> <p>80% complete</p>	<p>A. Future Market Behavior</p> <ul style="list-style-type: none">Assessing competitiveness of fuel cell M/HDVs <p>C. Inconsistent Data, Assumptions & Guidelines</p> <ul style="list-style-type: none">Consistent modeling methodology using established DOE cost/price and performance targets <p>D. Insufficient Suite of Models and Tools</p> <ul style="list-style-type: none">Expand spatial and temporal analysis tools to M/HDV sector
Budget	Partners
<p>Total Project Funding: \$450k</p> <ul style="list-style-type: none">FY18: \$250kFY19: \$100kFY20: \$100k <p>Total DOE funds received to date: \$350k</p>	<p><i>Modeling</i> (FY18) University of South Carolina - Dr. Yuche Chen</p> <p><i>External Peer Reviewers</i> (alphabetical) Argonne National Laboratory, Bosch, California Air Resources Board (CARB), Center for Transportation and the Environment (CTE), Cummins, Eaton, Energy Independence Now (EIN), FedEx, Toyota, DOE Vehicle Technologies Office</p>

Relevance (1/2): FCTO Systems Analysis Framework

Fuel Cell M/HDV Market Segmentation Integrates System Analysis Framework:

- Leveraging and expanding existing systems analysis models
- Systems analysis approach using DOE cost and performance targets

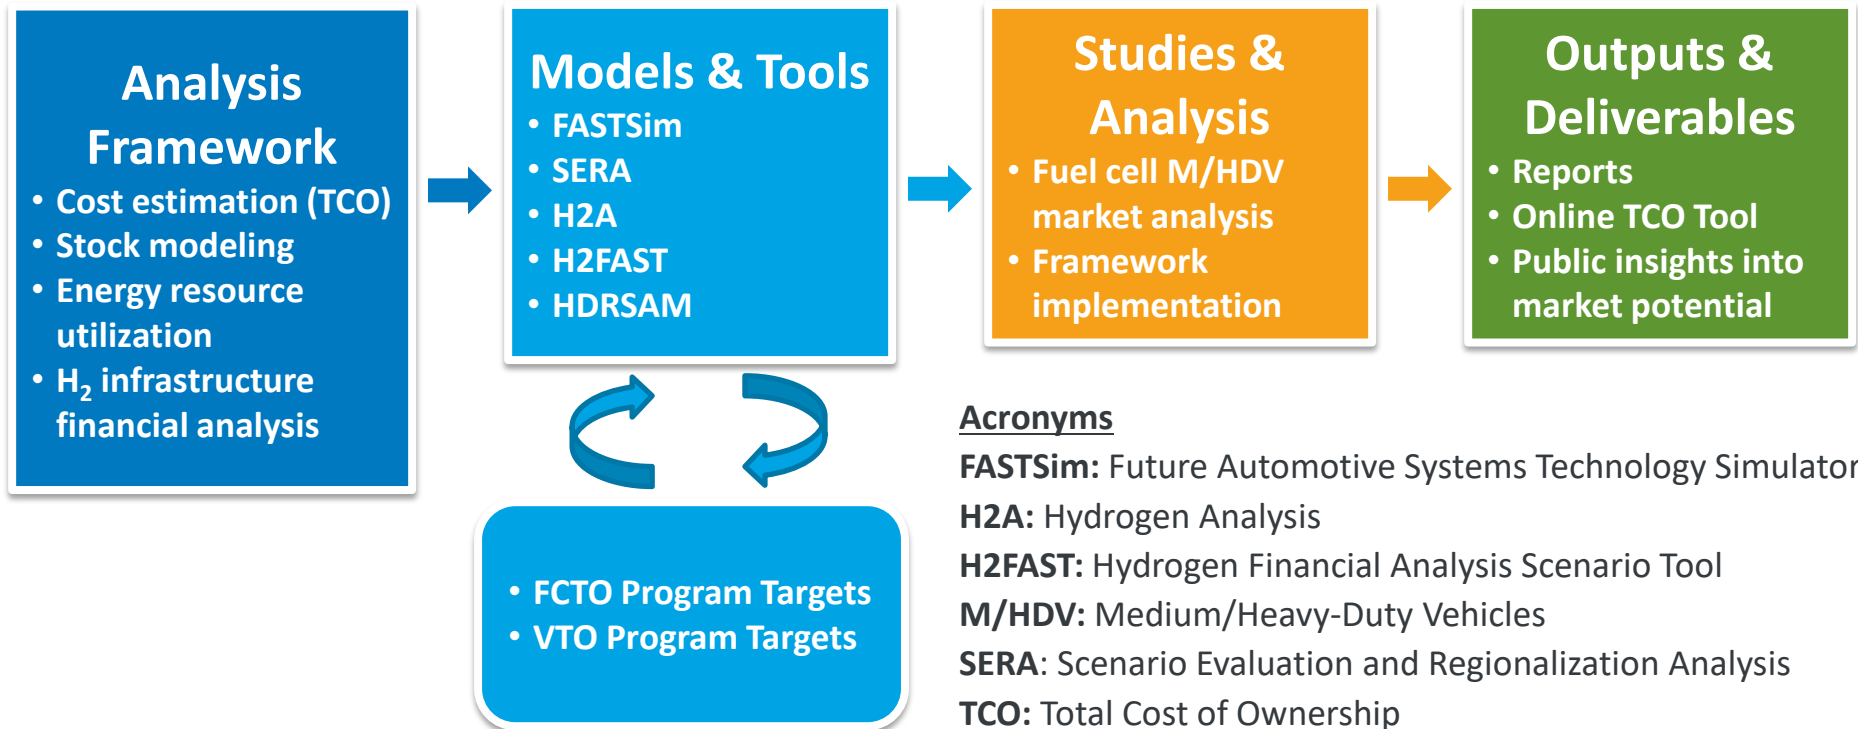

FCEV Market Segmentation Objectives

Project Objectives:

1. To provide industry, government, and non-government **stakeholders** a broad scoping **assessment** of medium/heavy duty fuel cell vehicle **market opportunities** across different classes, vocations, regions, and time
2. Assess technical **barriers and opportunities** for improvement in the medium/heavy duty fuel cell vehicle technology space to guide DOE **investment** in advanced technologies (MYRDD Milestone 1.16, 1.17)


Approach (1/3): Analysis Approach Overview



FASTSim



SERA

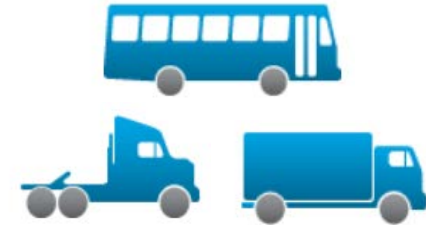

Vehicle Powertrain Cost Modeling

Total Cost of Ownership Modeling

Market Assessment

Inputs:

- Vehicle attribute data
- Drive cycle data
- Powertrain technology cost and performance data

Constraints:

- Powertrains meet target acceleration and gradeability

Outputs:

- Vehicle fuel economy, weight
- Component costs & MSRP

Inputs:

- Cost data
 - Vehicle MSRP (FASTSim)
 - Regional fuel prices
 - Operating & Maintenance cost
 - Payload opportunity cost
 - Dwell (refueling) time cost
- Vehicle data
 - Miles travelled, lifetime
 - Fuel economy, weight
- Financial data (discount rate)

Outputs:

- Total cost of ownership

Impact on FCTO Barriers:

- Identify key drivers to fuel cell truck competitiveness
- Assess fuel cells for commercial applications

Integration with Other

Projects:

- Coordinated with VTO/FCTO/BETO total cost of ownership analysis (ongoing)
- Potentially provide results to future H2@Scale analysis


Regional TCO analyzed using established models and OEM specifications

Approach (2/3): FASTSim used for powertrain optimization

Current and Future (2025, Ultimate) Performance and Cost Data¹

Target year	2018	2025	Ultimate
Batteries			
Battery pack mass [kg/kWh]	4.70	4.03	2.50
HEV battery pack cost [2016\$/kWh]	389	275	80
PHEV battery pack cost [2016\$/kWh]	389	275	80
PEV battery pack cost [2016\$/kWh]	389	275	80
Power Electronics (PE)			
Power electronics with boost & motor [2016\$/kW]	53	46	26
FCEV			
Fuel cell specific power [kW/kg]	0.96	1.02	1.02
Fuel cell cost [2016\$/kW]	(160-200) 181	113	60
Fuel cell system peak efficiency [% LHV]	63.6%	66%	72%
Storage specific mass [kWh-LHV/kg]	1.48	1.80	2.20
Storage cost [2016\$/kWh-LHV]	15.7	11.4	8.0
CNG			
Engine efficiency improvement (absolute)	0%	0%	0%
Engine cost [\$/kW]	55	55	55
Fuel storage cost [\$/usable kWh NG-LHV]	7.47	4.70	3.82
Fuel storage specific mass [kWh/kg]	4.21	4.47	5.10
Conventional			
Engine specific power [kW/kg]	0.27	0.27	0.27
Engine fixed cost [\$/kW]	5000	5000	5000
Engine power cost [\$/kW]	50	50	50
Engine efficiency improvement (absolute)	0%	2%	10%
Fuel storage specific mass [kWh/kg]	9.88	9.88	9.88

FASTSim models vehicle fuel economy, weight, and cost for each year and powertrain for direct comparison

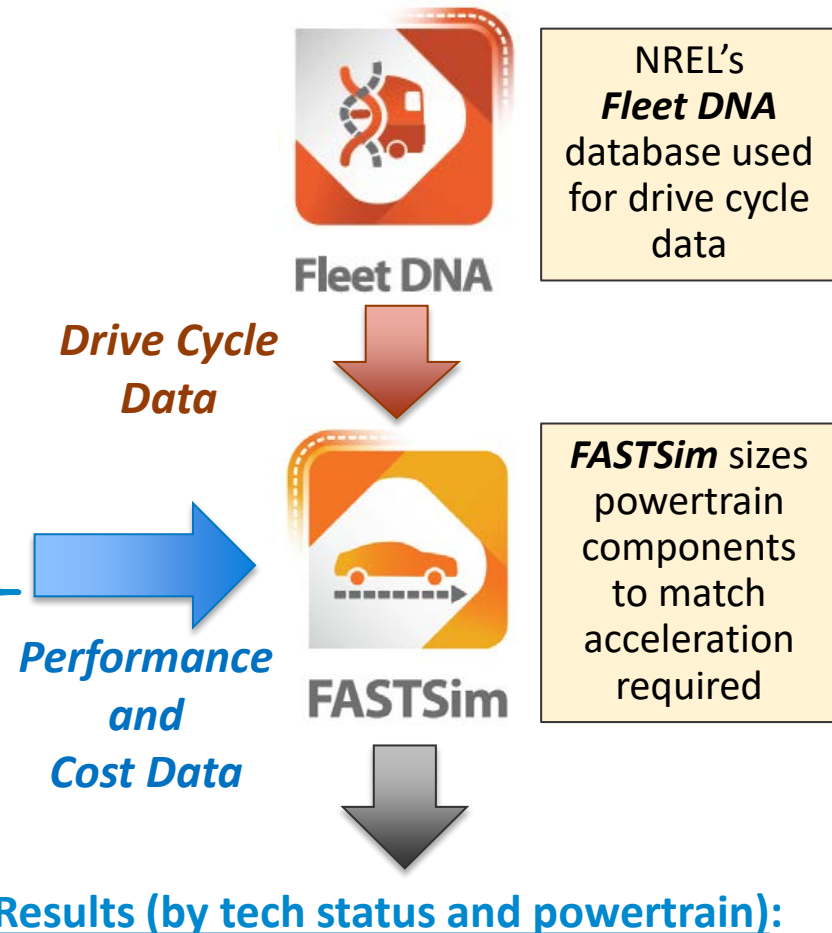

Results (by tech status and powertrain):

- **Output:** Fuel economy, weight, costs, MSRP
- **Status:** Current (2018), Tech Targets (2025, ultimate)
- **Powertrains:** Diesel, compressed natural gas (CNG), hybrid-electric (HEV), plug-in hybrid electric (PHEV), battery electric (BEV), fuel cell electric (FCEV)

Approach (3/3):

Total cost of ownership modeling in SERA

Cost Data



Vehicle Price
FASTSim



Fuel Price
AEO Outlook, EPRI, Tesla,
HDRSAM, FCTO Targets



O&M Cost
Literature survey, fuel-cell
bus evaluations



Payload Opportunity Cost
Equivalent TL rate, National
Research Council, VIUS data



Dwell* Time Cost
ATRI, FMCSA, OOIDA, Nikola,
Tesla

*Dwell time = down time for refueling/recharging

Financial Data



Discount Rate
US Market Data

Vehicle Data



Fuel Economy & Weight
FASTSim



Vehicle Miles Traveled
Transportation Energy Data
Book, Fleet DNA



Lifetime
Transportation Energy Data
Book, Industry Feedback



Total Cost of Ownership for:

Status	Powertrains
2018	Diesel
2025	Diesel Hybrid (HEV)
Ultimate	Compressed Natural Gas (CNG) Battery Electric (EV) Fuel Cell Electric (FCEV) Plug-in Hybrid (PHEV)

*Low/med/high estimates used for sensitivity analysis

Total Cost of Ownership calculated for all Low/Med/High estimates of all input vehicle data and cost data

Accomplishments and Progress (1/13): FASTSim updates from 2019 AMR at a glance



FASTSim

FASTSim Vehicle Modeling Updates

1. Adjusted the interim analysis year from 2020 to 2025
2. Improved vehicle component cost data
 1. Leveraged the latest VTO-Target Setting work (Lustbader, et al., 2019) to update the current battery pack and electric machine costs for heavy-duty vehicle applications
 2. Improved CNG tank cost estimates based on recent FCTO project by SA Inc.
 3. Improved the hydrogen tank cost based on the recent FCTO Program Record (#19008)
3. Improved vehicle performance data
 1. Updated baseline diesel vehicle projections based on the latest VTO-Target Setting work (Lustbader et al., 2019) and FCTO Program Record (#19006)
 2. Updated fuel cell system peak efficiency and specific power based on recent FCTO Program Record (#19006)
4. Added FASTSim runs with regulatory drive cycles for easier fuel economy comparisons with other projects and public data
5. Completed preliminary FASTSim runs for Class 8 drayage, Class 8 transit bus, Class 8 refuse, Class 6 parcel delivery, Class 6 box truck, and Class 5 van

	Class	Vocation
FY18-20	Class 4	Parcel Delivery
	Class 5	Van, Basic Enclosed
	Class 6	Box Truck
FY19-20	Class 6	Parcel Delivery
	Class 8	Transit Bus
	Class 8	Refuse, Garbage Pickup
FY18-20	Class 8	Drayage
	Class 8	Short Haul
	Class 8	Long Haul

Vocations with large share of fuel consumption in each Class per VIUS

This project incorporates the latest work from multiple other DOE projects and peer-reviewed papers

Accomplishments and Progress (2/13): SERA TCO updates from 2019 AMR at a glance



SERA TCO Modeling Updates


1. Updated CNG fuel prices based on discussion with AFDC data with DOE VTO Clean Cities team
2. Updated HEV O&M costs to better match conventional vehicles and observed data
3. Improved dwell time calculations for PHEV powertrains
4. Updated payload opportunity cost calculations to reflect potential incurred costs rather than lost revenue
5. Added General Operations costs (insurance, permits/licenses, tolls, tires) to allow comparison of TCO across other external studies
6. Added 2,000 lb Federal weight limit exemption for advanced powertrain trucks (up to 82,000 lbs)

Numerous discussions with industry stakeholders, research institutions, and the DOE have improved the modeling data and assumptions

Accomplishments and Progress (3/13): Class 8 Long Haul (750 mile) Vehicle Fuel Economy




Class 8 Tractor Drive Cycle

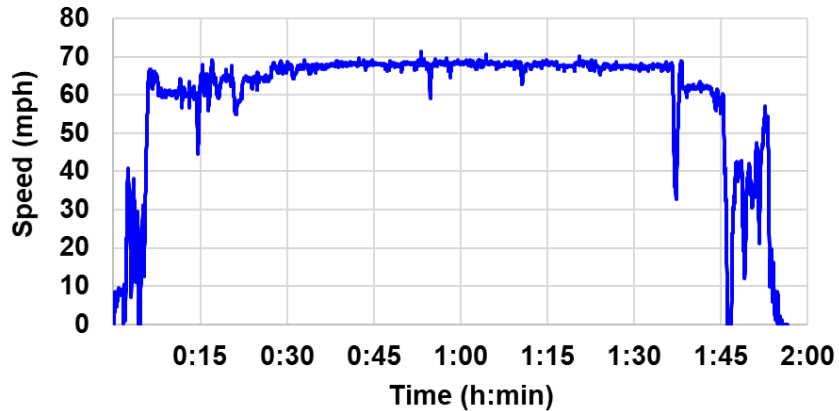

- Updated baseline diesel vehicle projections based on the latest VTO-Target Setting work (Lustbader et al., 2019) and FCTO Program Record (#19006)
- Updated fuel cell system peak efficiency and specific power based on recent FCTO Program Record (#19006)
- Resulting fuel economy values are shown below for the Fleet DNA real-world drive-cycle with these updated data

Class 8 Long Haul

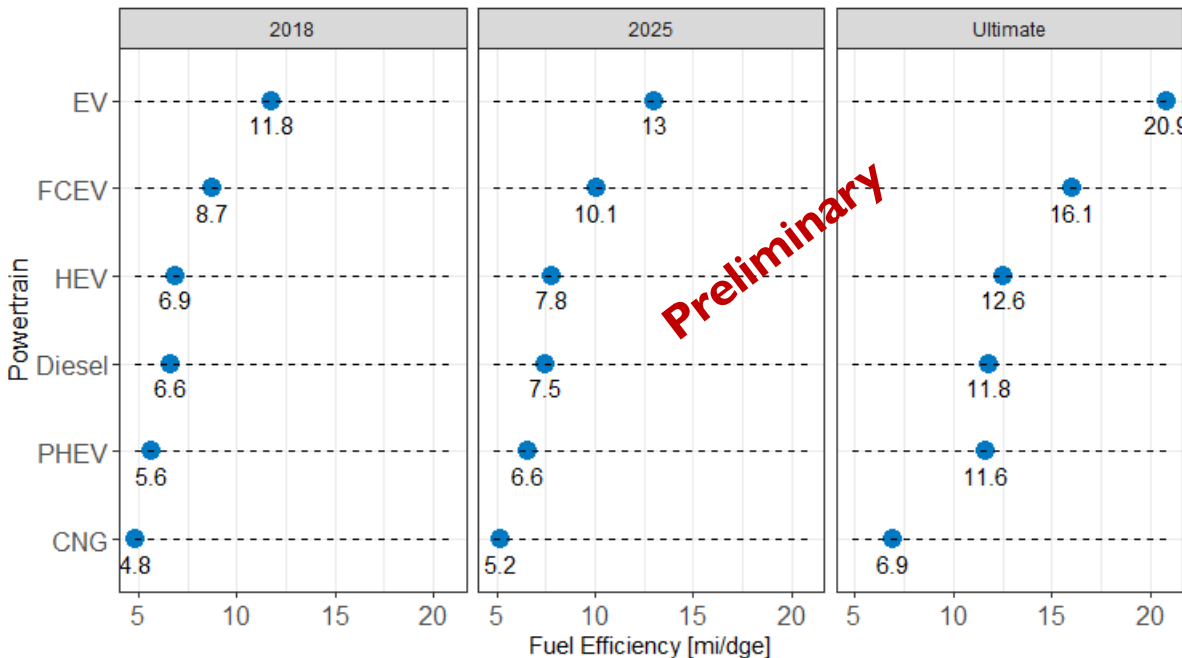


Updated fuel economy estimates better match future diesel truck projections

Accomplishments and Progress (4/13): Class 8 Long Haul (750 mile) Vehicle MSRP Modeling



FASTSim


- Powertrain components sized to meet acceleration needs (0-60 mph, ~60 sec)
- Class 8 Long Haul required range of 750 miles between refueling/recharging
- Vehicle cost/MSRP driven by H₂ storage, H₂ fuel cell stack, and battery

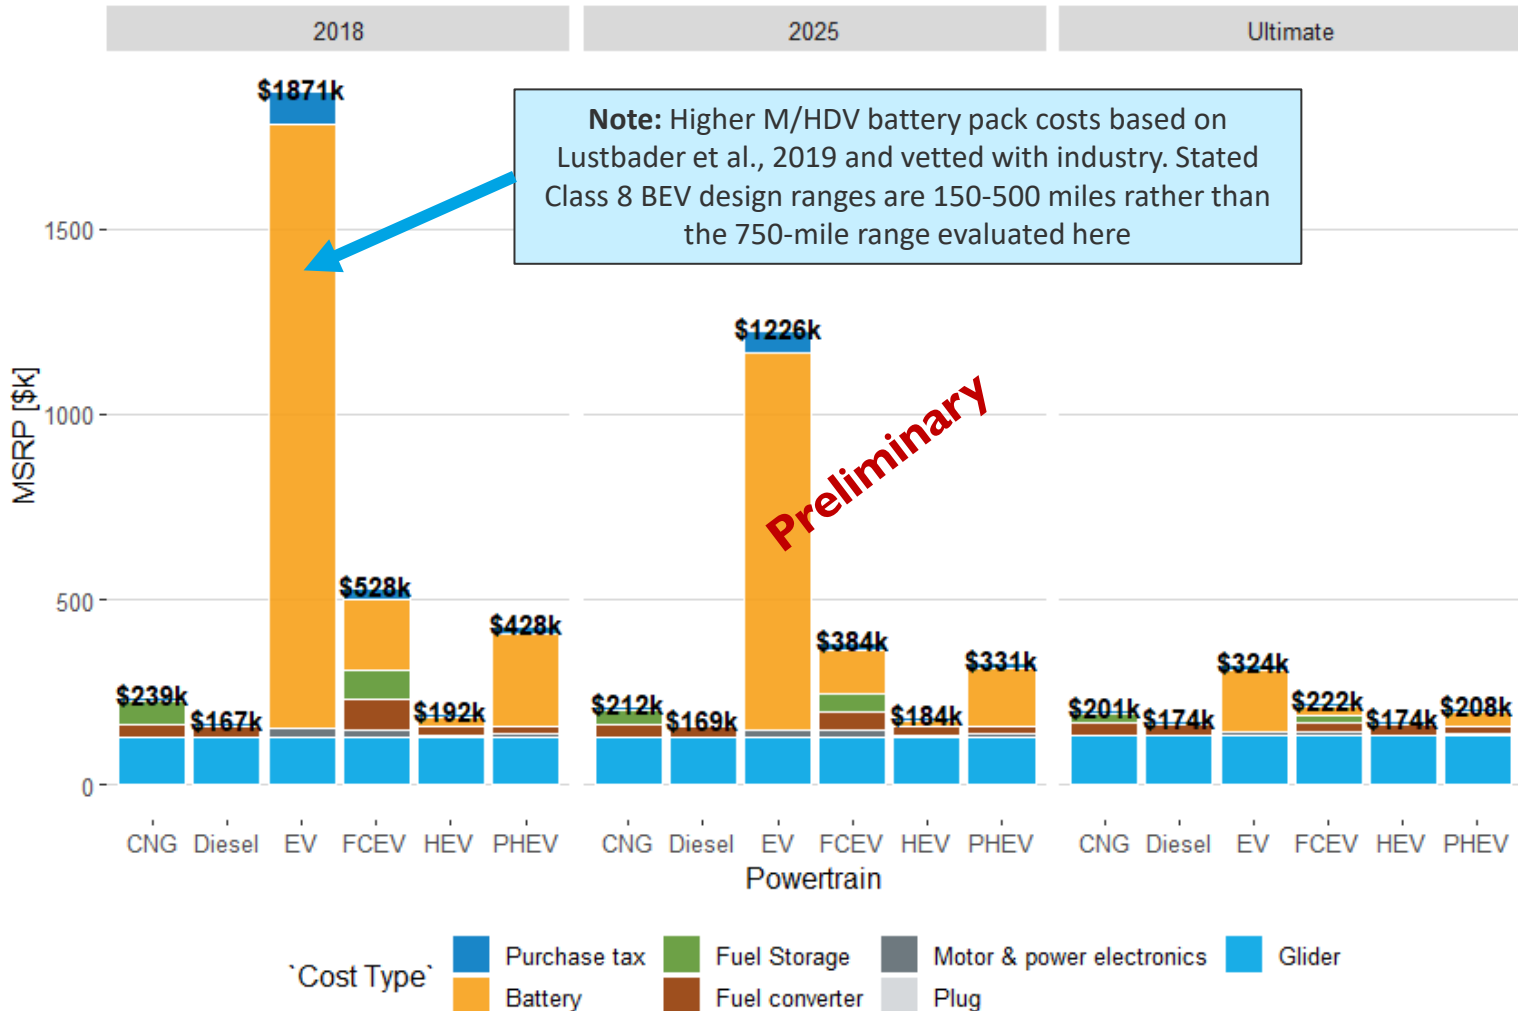

Accomplishments and Progress (5/13): Class 8 Drayage (300 mile) Vehicle MSRP Modeling



- Powertrain components sized to meet acceleration needs
- Class 8 Drayage required range of 300 miles between refueling/recharging

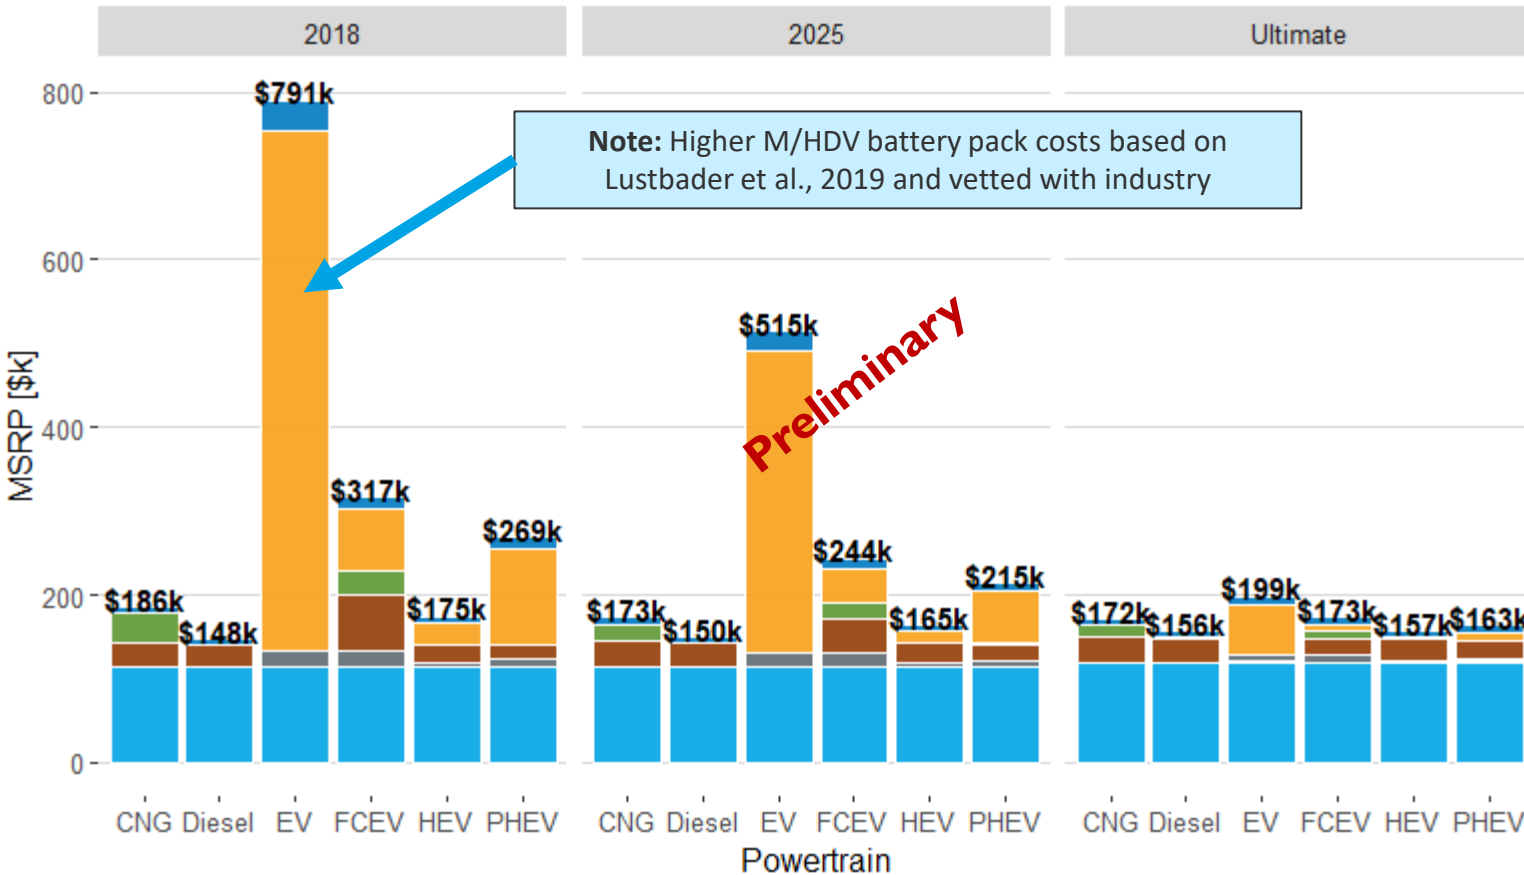


Note: Higher M/HDV battery pack costs based on Lustbader et al., 2019 and vetted with industry

Note:
Fuel Converter =
Engine or Fuel Cell

Preliminary


HDV battery costs is also significant for FCEV powertrains



Accomplishments and Progress (6/13): Class 8 Transit Bus (300 mile) Vehicle MSRP Modeling



- Powertrain components sized to meet acceleration needs
- Class 8 Transit Bus required range of 300 miles between refueling/recharging
- Vehicle cost/MSRP driven by the glider based on limited diesel bus data

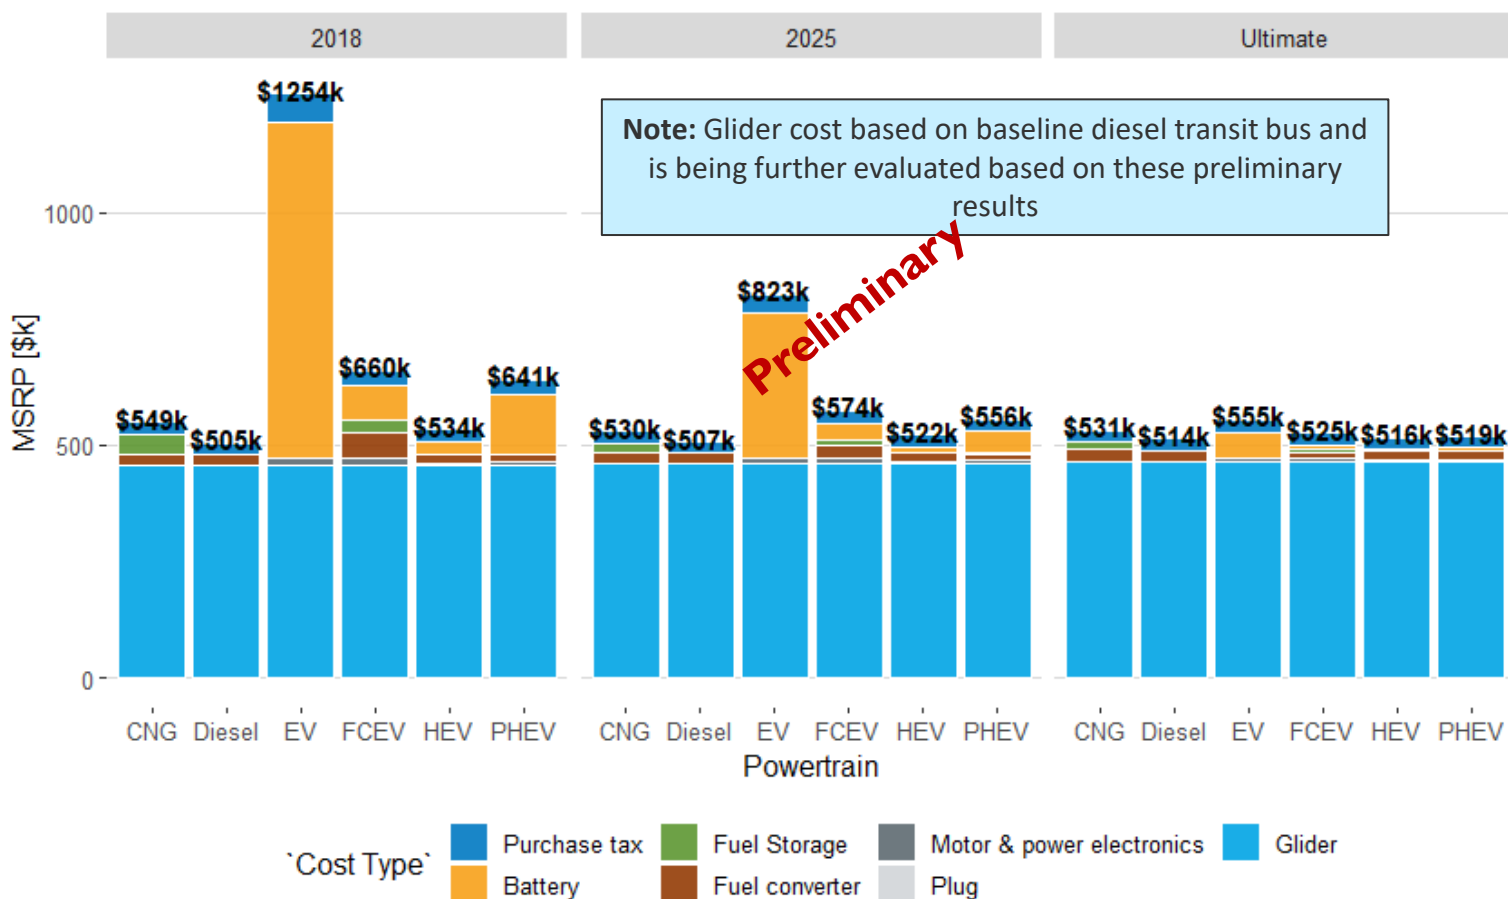

**Class 8
Transit Bus
costs driven
primarily by
glider costs**

**FCEV near
parity if the
2025 cost
targets are
met**




FASTSim

Accomplishments and Progress (7/13): Class 8 Refuse (200 mile) Vehicle MSRP Modeling

- Powertrain components sized to meet acceleration needs (0-60 mph, ~60 sec)
- Class 8 Long Haul required range of 750 miles between refueling/recharging
- Vehicle cost/MSRP driven by H₂ storage, H₂ fuel cell stack, and battery

Note:
Fuel Converter =
Engine or Fuel Cell

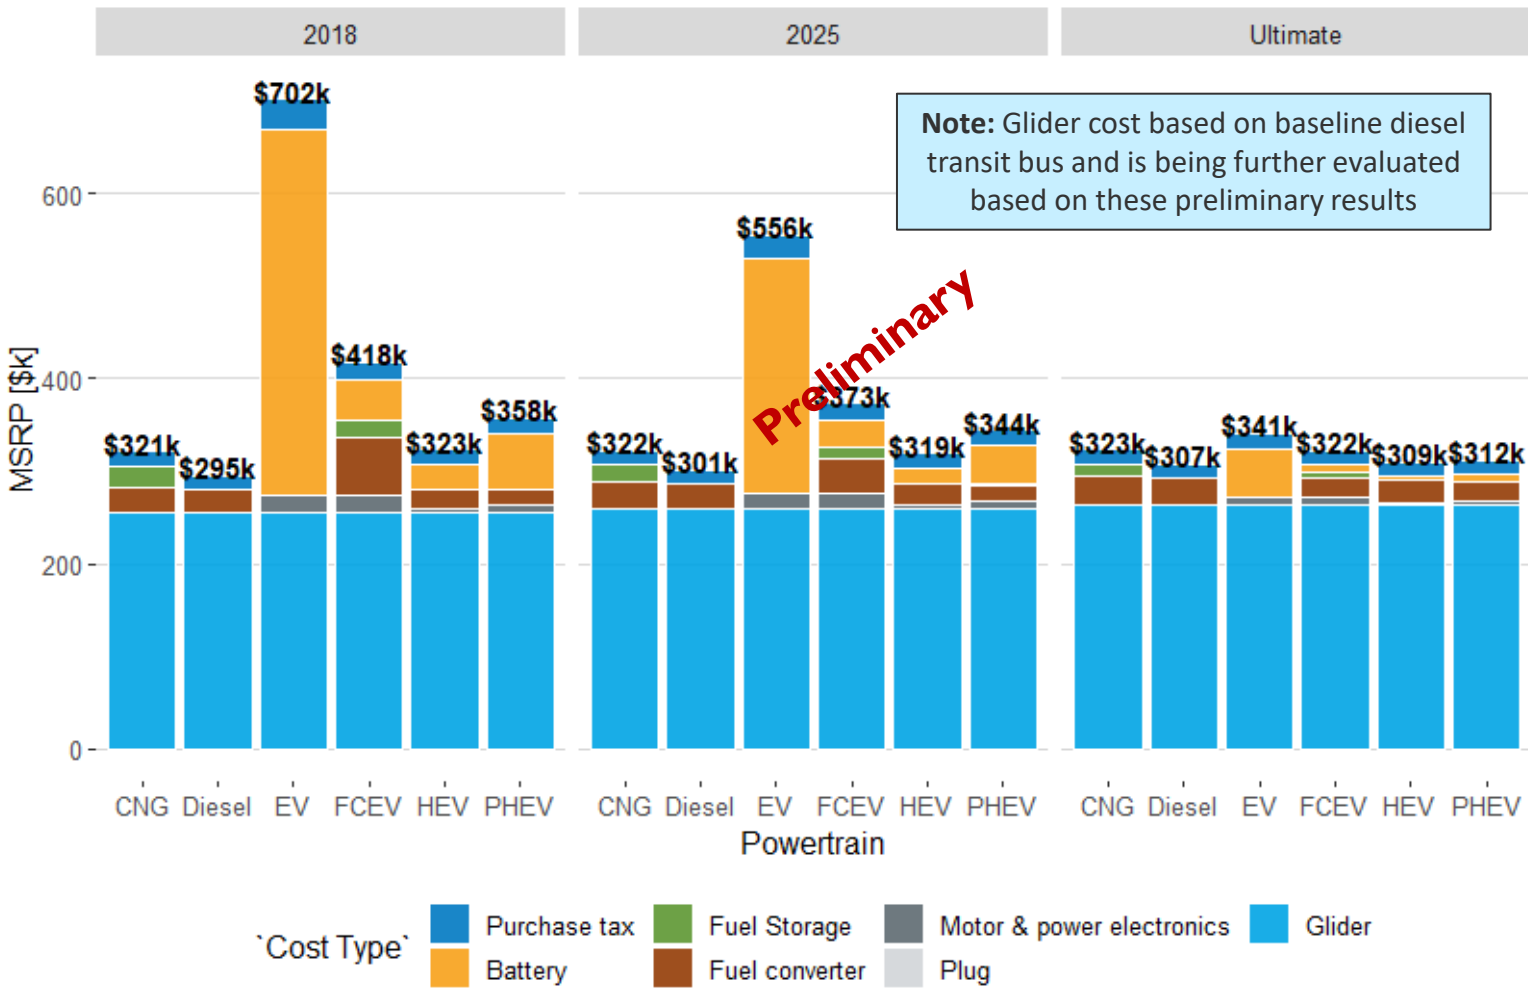

Class 8 Refuse costs are driven by the glider

FCEV is within ~5% of cost parity with diesel if Ultimate targets are achieved

Accomplishments and Progress (8/13): Total Cost of Ownership Scenario Definition



Operating Shift (Single vs Multi)

Payload Limitation (Vol vs Wt)

Single Shift,
Volume
Limited

Multi-Shift,
Volume
Limited

Single Shift,
Weight
Limited

Multi-Shift,
Weight
Limited

*Focus of the Class 8 Long Haul
results in this presentation*

Scenario regimes were defined in the AMR 2019 slides.
Regimes validated since then with conversations with industry

Accomplishments and Progress (9/13): Updated the approach to valuing lost payload



Lost payload* value based on minimum cost of fleet's four options:



- Quantify as if fleet would buy a similar truck to meet the needs of the fleet
- Compute levelized cost to purchase additional trucks for the fleet
- E.g. if 10 diesel trucks are needed, and an EV truck has 10% less payload, the fleet would need to buy 11 trucks total

- Quantify as if fleet would rent a similar truck to meet the needs of the fleet
- Mathematically similar to **Buy** option but there are differences in capital depreciation, overhead charges, and taxes

- Buying cargo capacity services on the TL/LTL market
- TL rates for marginal cargo capacity are significantly higher than the levelized cost of ownership of a fully-loaded truck

- Do nothing and potentially not meet the needs of the fleet/business
- Immediate revenue losses, reduced customer lifetime

Data: Levelized TCO
Cost: ~\$0.03/klb-mi

Rental Firm Survey
~\$0.04/klb-mi

LTL Rate Survey
~0.3 \$/klb-mi

Assumed Infeasible
>> ~\$0.3/klb-mi

Approach used in these
2020 AMR Slides

Approach used in the
2019 AMR Slides

*Only applies for lost payload above 2,000lb federal exemption, incremental fuel economy impact accounted for within the 2,000lb Federal limit

Accomplishments and Progress (10/13): Total Cost of Ownership Scenario Analysis




SERA

Scenario Parameters

- Class 8 Long Haul in Mid-Atlantic Region
- 100,000 mi/yr, 10 year life
- Payload Cost = **High**, Dwell Cost = **High**
- Fuel, O&M Costs = Mid
- Discount Rate = 7%

FCET costs driven by fuel (\$7/gge H2 in this scenario), while payload and dwell costs are insignificant for FCEV

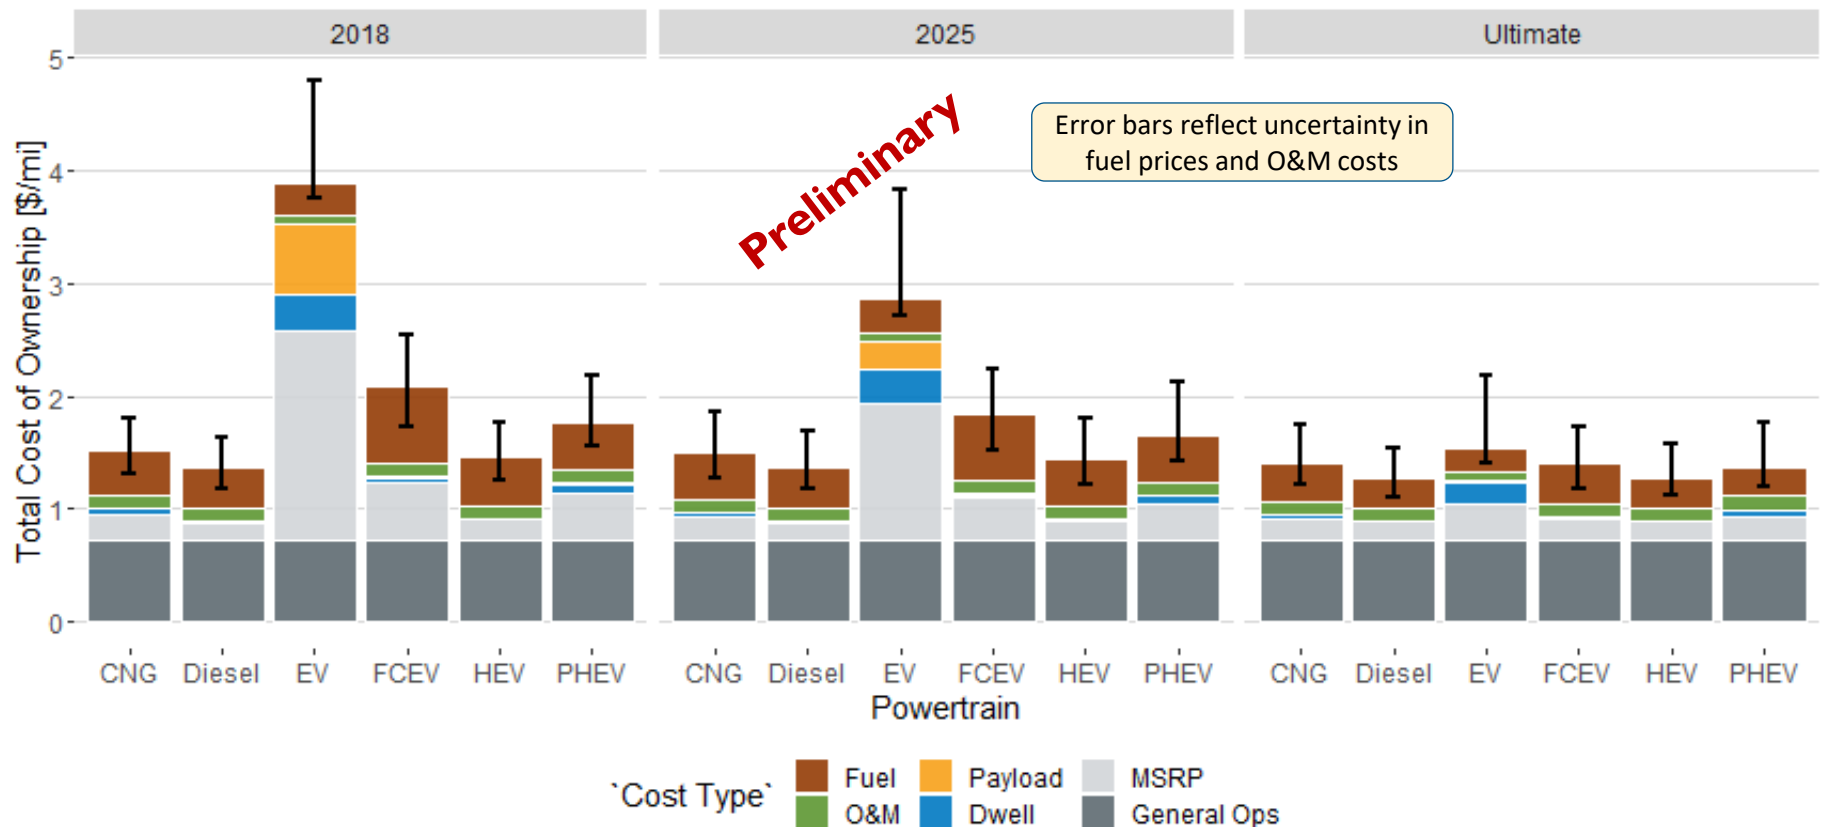


Accomplishments and Progress (11/13): Total Cost of Ownership Scenario Analysis



SERA

Breakeven Fuel or Electricity Price (\$/gge)


At Diesel Price of \$4/gal

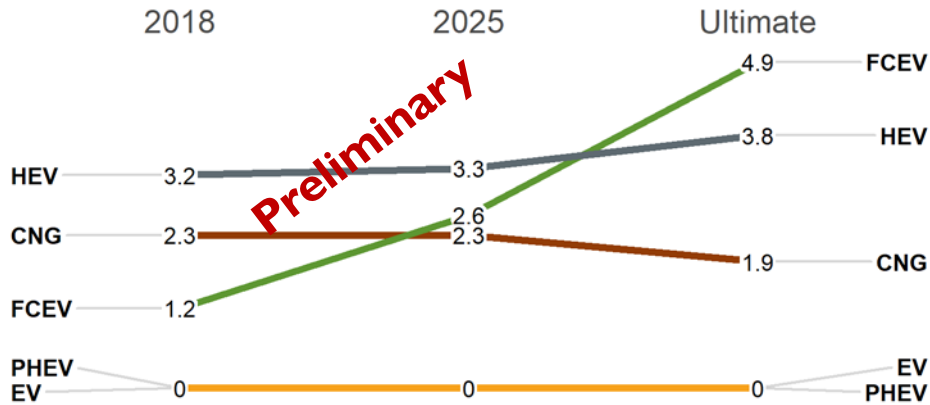

Updated since 2019 AMR Slides. In this scenario, the EERE Ultimate targets must be achieved for FCEVs to achieve TCO parity with diesel


Breakeven Fuel or Electricity Price (\$/gge)

At Diesel Price of \$3/gal

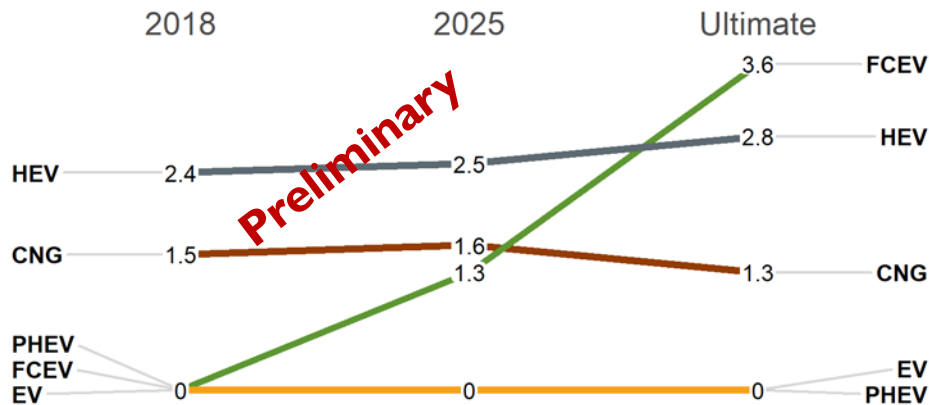

Breakeven Fuel or Electricity Price (\$/gge)

At Diesel Price of \$2/gal

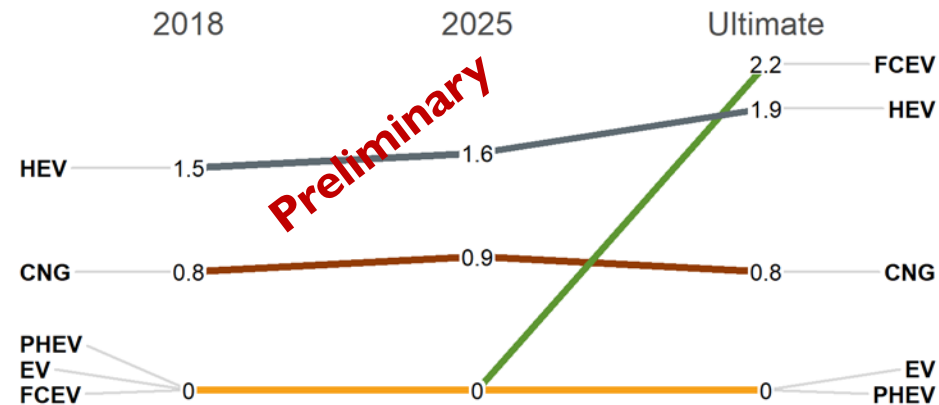


Accomplishments and Progress (12/13): Updated TCO waterfall chart with latest data



SERA

Scenario Parameters

- Class 8 Long Haul
- Mid Atlantic Region
- 2018 Technology
- 100,000 mi/yr
- 10-year life
- Discount Rate = 7%

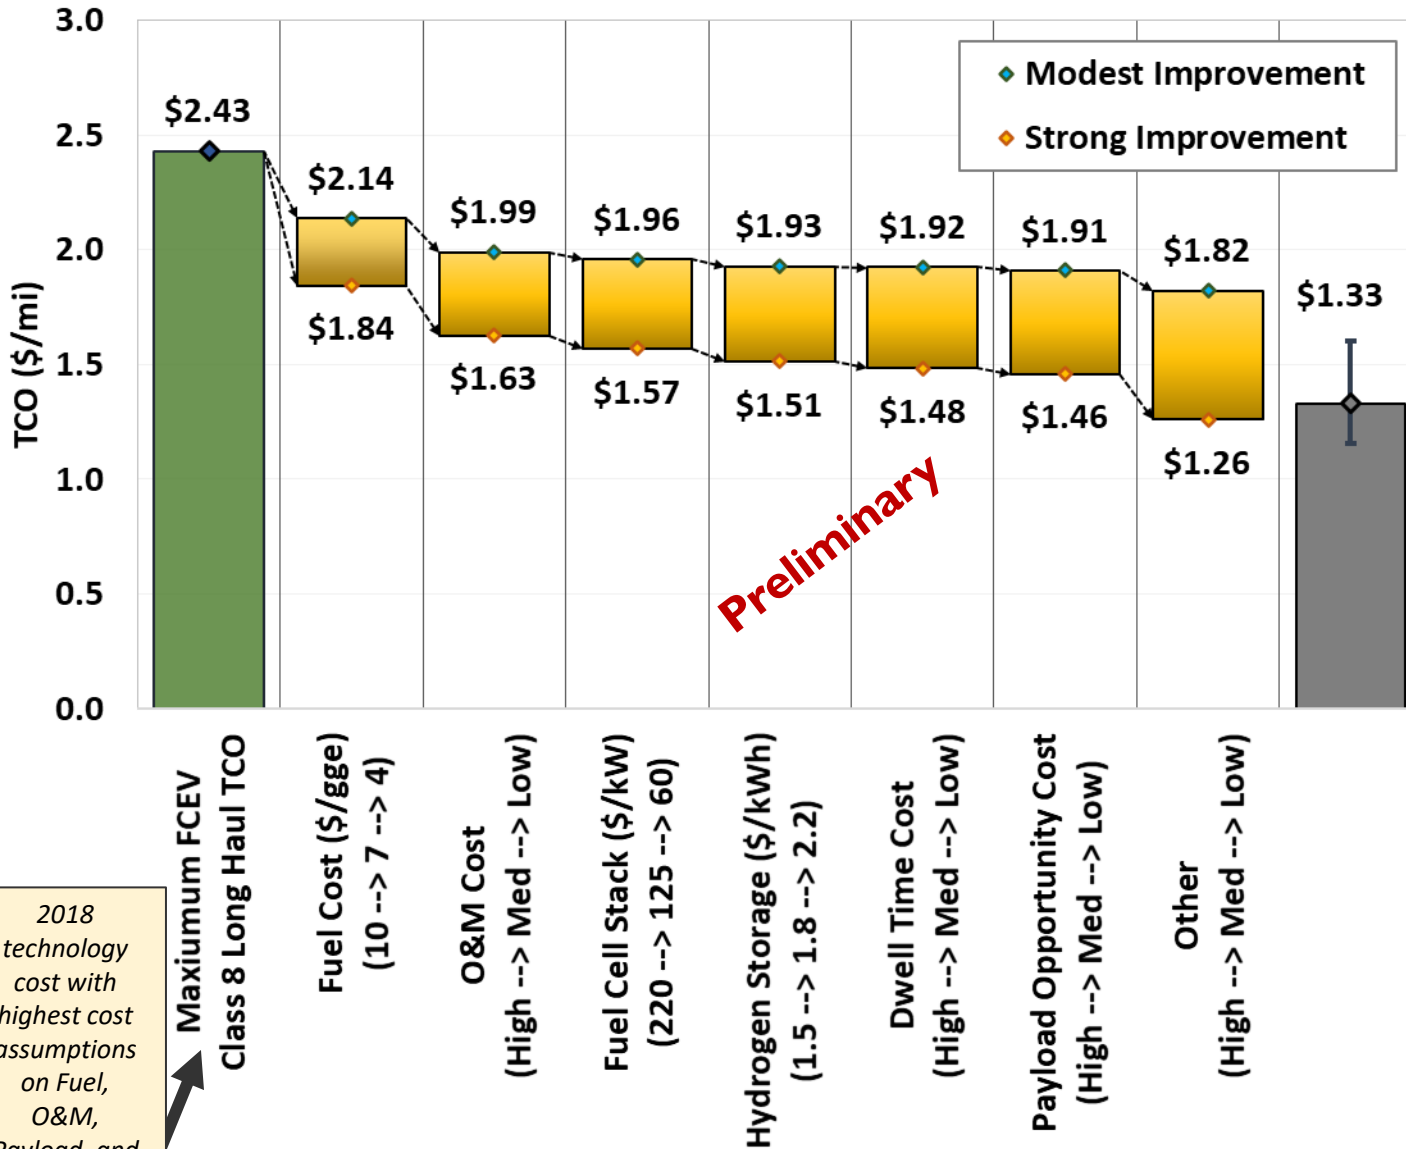

Strong improvements in just hydrogen fuel cost and O&M costs allows the FCEV to achieve cost parity with diesel

2018 technology cost with highest cost assumptions on Fuel, O&M, Payload, and Dwell Costs

Accomplishments and Progress (13/13)

Responses to Reviewers' Comments

Fuel Cell Stack Costs: The text suggests that the values are from DOE targets, but the peak fuel cell system efficiency shown for 2020 and the ultimate efficiency do not match the DOE Fuel Cell Technologies Office (FCTO) targets for fuel cell system peak efficiency.

This has been updated based on the 2019 FCTO Program Record for Hydrogen Class 8 Long Haul Truck Targets (#19006).

Fuel and Refueling Infrastructure Costs: It is recommended the team reach out to infrastructure providers to better understand these costs.

Explicit, detailed infrastructure analysis is outside the scope of this current project and being completed by other DOE FCTO Projects.

Industry Peer Reviewers: An expanded list of fleet users in the collaborators and reviewers could be beneficial

The team has engaged with additional fleet stakeholders (e.g. NACFE) and DOE collaborators investigating M/HD TCO aspects since the 2019 AMR. Those conversations have informed the development of this project, but they have not officially reviewed the project/report and thus are not listed in this deck.

Online Tool: The project team is strongly, strongly encouraged to publish a version of this model that any stakeholder can use.

While an online tool was originally being developed, the team is working with other national labs and the DOE Vehicles Technology Office to support a more wholistic TCO tool for all on-road vehicles. It is expected that this tool will be publicly available near the end of 2020.

Collaboration and Coordination

DOE	National Labs
<p>Fuel Cell Technologies Office</p> <p>Vehicle Technologies Office</p> <ul style="list-style-type: none">• Jake Ward• Madhur Bloor• Clean Cities Team<ul style="list-style-type: none">• Dennis Smith• Mark Smith• Linda Bluestein	<p>ANL</p> <ul style="list-style-type: none">• Ram Vijayagopal• Amgad Elgowainy• Aymeric Rousseau <p>NREL</p> <ul style="list-style-type: none">• Jason Lustbader• Matteo Muratori• Mike Lammert

Other Peer Reviewers

Bosch
California Air Resources Board (CARB)
Center for Transportation and the Environment (CTE)
Cummins
Eaton
Energy Independence Now (EIN)
FedEx
SA, Inc.
Toyota

The mix of industry, state agency, and non-profit organizations has been very helpful in defining the scenarios and visualizations that are the most useful to see

Remaining Challenges and Barriers

Data Certainty

- There is limited public, robust data on many of the total cost of ownership parameters
- Large uncertainty ranges impacts the ability to segment the M/HD market as multiple powertrain technologies can compete under different conditions

Modeling Actual Vehicle Ownership Behavior

- Total cost of ownership over the lifetime of the vehicle may not represent how industry owns vehicles. For example, Class 8 Long Haul first owners typically own them for ~2-4 years before selling in secondary market. Resale value of Battery and Fuel Cell powertrains is unknown and difficult to estimate

Future Work and Potential Work

FY20 Project Plan

FASTSim Cost Modeling

- Complete modeling for remaining vehicles

SERA TCO Modeling

- Integrate remaining vehicle FASTSim outputs into SERA
- Complete TCO sensitivity and scenario analysis

Knowledge Transfer

- Obtain feedback on Online Tool
- Publish NREL report on FY18 vehicles
- Publish NREL report for FY19 vehicles

FASTSim Cost Modeling (FY20)

- Complete FASTSim vehicle modeling for remaining vehicles in this study (Class 4 Delivery and Class 8 Short/Long Haul completed)

SERA TCO Modeling (FY20)

- Integrate FASTSim outputs for remaining FY20 vehicles into SERA for TCO analysis
- Complete TCO analysis including Sensitivity and Scenario analysis for all vehicles/vocations

Knowledge Transfer (FY20)

- Publish the NREL Report on Class 4 Parcel Delivery and Class 8 Short/Long Haul
- Publish NREL Report on remaining vehicles/vocations

Potential Future Scope (FY20+)

- Integrate with **H2@Scale** through temporal and spatial supply, demand, and storage requirements
- Integrate TCO data into ADOPT-HD vehicle choice model
- Evaluate other vehicle segments (rail, marine)

Technology Transfer Activities

- **FASTSim** is currently available (LDV) and the updated version (with M/HDV capabilities) will be made available after project completion
 - <https://www.nrel.gov/transportation/fastsim.html>
- Licensing of **SERA** model is being considered. Please inquire if you are interested in using it.
- Two NREL Reports will be published detailed the modeling methods, assumptions, and results

Summary



SERA



FASTSim

Relevance

- Completed analysis of program performance and cost status for the potential use of fuel cells for commercial applications and to help enable them (MYRDD Milestone 1.16, 1.17)

Approach

- FASTSim for vehicle optimization to obtain vehicle cost, fuel economy, and weight
- SERA TCO modeling direct costs (MSRP, fuel, O&M) and indirect costs (payload, dwell)

Accomplishments and Progress since FY19

- Improved vehicle component cost data (battery costs, electric machine costs, CNG tank costs, H2 tank costs) based on the most recent data available to improve the integrity of the results
- Improved vehicle performance data (baseline diesel vehicle improvements, fuel cell system peak efficiencies, fuel cell specific power) based on the most recent data available
- Completed preliminary FASTSim runs for Class 8 drayage, Class 8 transit bus, Class 8 refuse, Class 6 parcel delivery, Class 6 box truck, and Class 5 van
- Updated relevant TCO data (CNG fuel prices, HEV O&M costs, general operations costs) and TCO calculations (dwell time, payload valuation) to more accurately estimate the TCO of advanced powertrains
- Coordinated and collaborated with stakeholders across industry, DOE, non-profits, and the national labs

FY20 Ongoing and Planned Work

- Publish NREL Report on Class 4 Parcel Delivery and Class 8 Long/Short Haul vehicles
- Complete vehicle modeling and TCO scenario/sensitivity analysis on remaining M/HD vehicles (Class 8 drayage, Class 8 transit bus, Class 8 refuse, Class 6 parcel delivery, Class 6 box truck, and Class 5 van)
- Publish NREL Report on Class 8 drayage, Class 8 transit bus, Class 8 refuse, Class 6 parcel delivery, Class 6 box truck, and Class 5 van

Thank You

www.nrel.gov

This work was authored by the National Renewable Energy Laboratory, operated by Alliance for Sustainable Energy, LLC, for the U.S. Department of Energy (DOE) under Contract No. DE-AC36-08GO28308. Funding provided by the U.S. Department of Energy Office of Energy Efficiency and Renewable Energy Fuel Cell Technologies Office. The views expressed in the article do not necessarily represent the views of the DOE or the U.S. Government. The U.S. Government retains and the publisher, by accepting the article for publication, acknowledges that the U.S. Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for U.S. Government purposes.



Technical Back-Up Slides

Acronyms

ATRI: American Transportation Research Institute

BETO: Bioenergy Technologies Office

BEV: Battery Electric Vehicle

CNG: Compressed Natural Gas

EPRI: Electric Power Research Institute

FASTSim: Future Automotive Systems Technology Simulator

FCEV: Fuel Cell Electric Vehicle

FCTO: Fuel Cell Technologies Office

FMCSA: Federal Motor Carrier Safety Administration

H2A: Hydrogen Analysis

H2FAST: Hydrogen Financial Analysis Scenario Tool

HDRSAM: Heavy-Duty Refueling Station Analysis Model

HEV: Hybrid-Electric Diesel Vehicle

LTL: Less than truckload

M/HDV: Medium/Heavy-Duty Vehicles

MSRP: Minimum Suggested Retail Price

MYRDD: Multi-Year Research, Development, and Demonstration Plan

OOIDA: Owner Operator Independent Drivers Association

PHEV: Plug-in Hybrid Electric Vehicle

SERA: Scenario Evaluation and Regionalization Analysis

TCO: Total Cost of Ownership

VIUS: Vehicle Inventory and Use Survey

VTO: Vehicle Technologies Office

Assumptions

FASTSim Modeling

- Cost and Performance Data – Slide 30
- Acceleration Target: Slide 31 for Class 8 Tractors
- Vehicle Weight based on Sum of Component Weights multiplied by 1.2 factor (EPA M/HDV Final Rulemaking)¹
- Vehicle Price (MSRP) based on Sum of Component Costs multiplied by 1.5 factor (peer-reviewed FASTSim value)

SERA TCO Modeling

- Fuel Prices – Slide 32
- Payload Opportunity Cost – Slide 35-36
- O&M Cost – Slide 33
- Dwell Cost – Slide 34
- Vehicle Miles Traveled – Based on Transportation Energy Data Book and Fleet DNA
- Vehicle Lifetime – Based on Transportation Energy Data Book and Industry Feedback
- Discount Rate – Based on Long Term Treasury Rates (3%), historical S&P 500 Performance (7-10%)

General

- Designed new powertrains to meet the performance of conventional (diesel) technology so a 1-1 vehicle displacement is implicitly assumed
- Durability and longevity of new powertrains is assumed to be the same as diesel technology which assumes vehicle manufacturers will create products that meet these requirements
- Assumed no incentives for zero or near-zero emission vehicles
- Assumed no value for emission reductions

1. "Final Rulemaking to Establish Greenhouse Gas Emissions Standards and Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles," Office of Transportation and Air Quality U.S. Environmental Protection Agency and National Highway Traffic Safety Administration, Policies and Guidance EPA-420-R-11-901, Aug. 2011

Key Market Segmentation Assumptions

Target year	2018	2025	Ultimate	References	Notes	
Batteries						
Battery pack mass [kg/kWh]	4.70	4.03	2.50	ARB 2016 (Lustbader, et al. 2019)	2018 values based on the 2019 VTO Truck Target Setting Work completed by Lustbader et al. (Advance Scenario)	
HEV battery pack cost [2016\$/kWh]	389	275	80		Ultimate value \$80/kWh (pack) are based on VTO's suggestion to use LDV targets while M/HDV targets are being set (email on 5/22/20). Interim set by calculating a constant %4.8 YoY improvement rate between 2018 and 2050	
PHEV battery pack cost [2016\$/kWh]	389	275	80		VTO LDV Targets	Original source does not have dollar year so reported as nominal. Assume equal to 2016\$
PEV battery pack cost [2016\$/kWh]	389	275	80		Assumed: Pack Costs = System Costs (includes all cooling/structural components included for vehicle glider integration)	
Power Electronics (PE)						
Power electronics with boost & motor [2016\$/kW]	53	46	26	Lustbader, et al. 2019	2019 VTO Truck Target Setting Work completed by Lustbader et al. (Advance Scenario)	
FCEV						
Fuel cell specific power [kW/kg]	0.96	1.02	1.02	SA Inc. 2018, Supplemental data	Ultimate uses 2025 value since reference did not propose an Ultimate value	
Fuel cell cost [2016\$/kW]	(160-200) 181**	113	60	2019 FCTO Record #19006 (Class 8 Truck Targets)	**Assumes \$170/kW in 2019 based on 1,000 units/yr (237,000 kW/yr)	
Fuel cell system peak efficiency [% LHV]	63.6%	66%	72%		Uses High Target for System Peak Efficiency	
Storage specific mass [kWh-LHV/kg]	1.48	1.80	2.20	2019 FCTO Record #19008 (Onboard Storage Cost)	Consistent with 2019 FCTO Record #19006 Assumes 100,000 systems/yr mfg vol (560,000 kg/yr which is ~7,000 systems for HD trucks)	
Storage cost [2016\$/kWh-LHV]	15.7	11.4	8.0			
CNG						
Engine efficiency improvement (absolute)	0%	0%	0%	FASTSim (multiple data sources)		
Engine cost [\$/kW]	55	55	55			
Fuel storage cost [\$/usable kWh NG-LHV]	7.47	4.70	3.82	SA Inc. 2017 estimate (currently unpublished)	Uses 1k, 30k, 500k systems/year production volumes	
Fuel storage specific mass [kWh/kg]	4.21	4.47	5.10	FY15 GPRA Benefits Analysis	Limited data available	
Conventional						
Engine specific power [kW/kg]	0.27	0.27	0.27	FASTSim (multiple data sources)		
Engine fixed cost [\$]	5000	5000	5000			
Engine power cost [\$/kW]	50	50	50			
Engine efficiency improvement (absolute)	0%	2%	10%	(Lustbader, et al. 2019)	Applies to Class 8 trucks, consistent with 2019 FCTO Record #19006	
Fuel storage specific mass [kWh/kg]	9.88	9.88	9.88	FASTSim (multiple data sources)		

FASTSim designs alternative powertrains to match the performance of the diesel vehicle



FASTSim

Diesel - acceleration (0-60 mph) based on public data and industry feedback

Diesel hybrid (HEV) – designed to have 75% of propulsion power from the engine to reduce reliance on its battery for extended road grade climbs

Fuel cell (FCEVs) - designed to be able to fully power the motor for grade operation while the hybrid battery was used for regenerative braking



Plug-in hybrid (PHEV) – (Class 4 only) powertrain sized proportionally to Workhorse E-Gen

Vehicle	Drivetrain	Motor (kW)	Engine (kW)	Fuel Cell (kW)	Max weight (lb)	Acceleration 0-60 mph (s)
Class 8 truck	Diesel		317		80,000	60
Class 8 truck	CNG		327		80,000	58
Class 8 truck	HEV	79	235		80,000	60
Class 8 truck	EV	361			80,000	49
Class 8 truck	FCEV			328	80,000	55
Class 4 parcel delivery	Diesel		155		16,000	30
Class 4 parcel delivery	CNG		155		16,000	30
Class 4 parcel delivery	HEV	38	115		16,000	30
Class 4 parcel delivery	EV	146			16,000	30
Class 4 parcel delivery	FCEV			144	16,000	30
Class 4 parcel delivery	PHEV	68	82		16,000	30

Fuel prices based on various sources including EIA Energy Outlook, Tesla, DOE Targets, HDRSAM, H2FAST, and EPRI

Fuel	Low	Mid	High
Diesel	AEO Low Oil	AEO Reference	AEO High Oil
Natural Gas	Anchored to Diesel prices and adjusted by reported CNG/Diesel price spread based AFDC data from 2016-2020*		
Electricity	Tesla quoted electricity price (\$0.07/kWh)	AEO Reference - Transportation	EPRI Reported DCFC Prices
Hydrogen	DOE Hydrogen Price Target (\$4/kg)	HDRSAM/H2FAST (\$7/kg)	HDRSAM/H2FAST (\$10/kg)

EPRI Reported DCFC Charging Prices

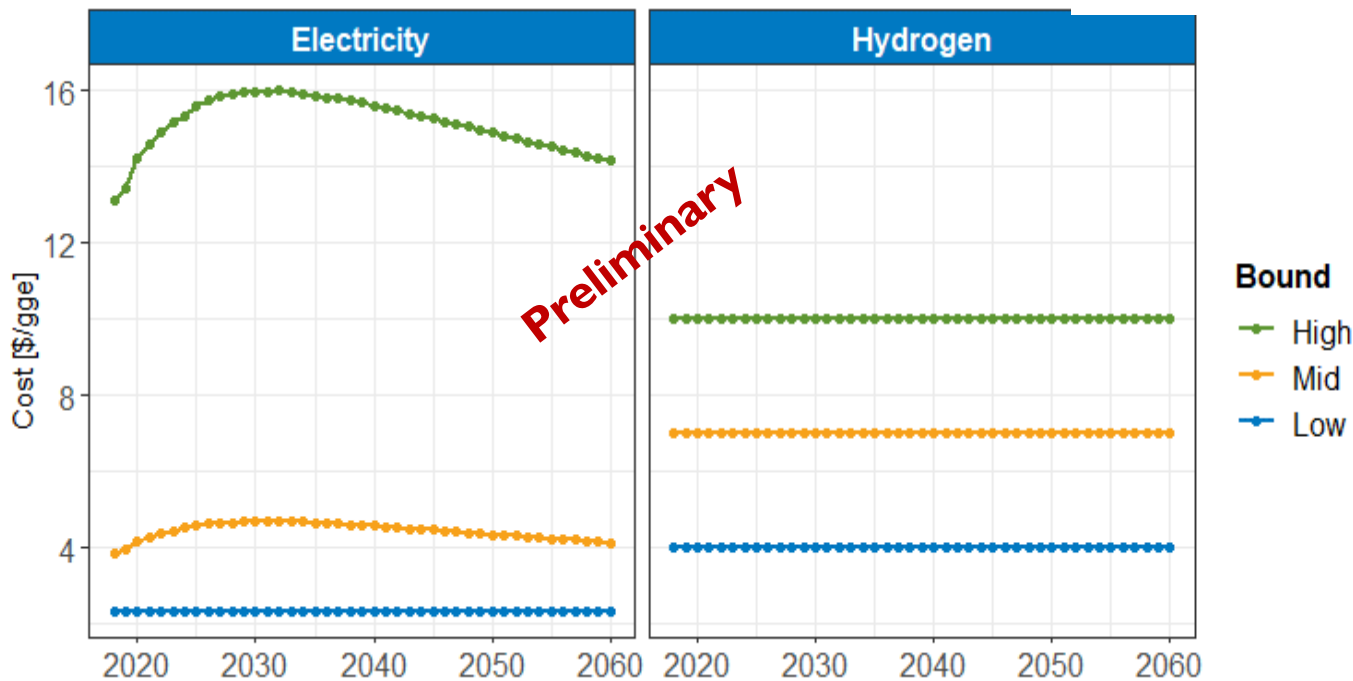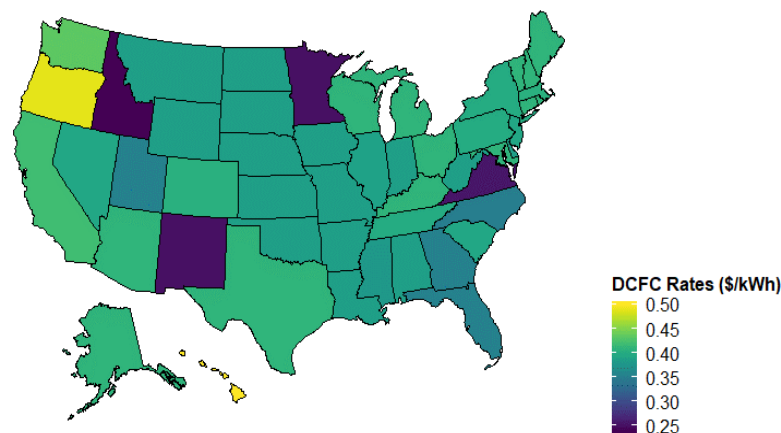

AEO Outlook CNG prices are ~25-30% lower than reported in AFDC for the same location

An actual-market-conversion-multiplier of 1.25 is used to scale the AEO Outlook CNG prices

*Recommended approach from VTO Clean Cities team that oversees AFDC database and CNG fuel prices


Operating and Maintenance costs based on extensive literature survey and NREL FC Bus Evaluations

Cost (\$/mi)	Bound	Diesel, HEV, PHEV	CNG	EV	FCEV
Class 4 Parcel Delivery	Low	0.057	0.049	0.046	0.046
	Mid	0.118	0.117	0.076	0.118
	High	0.233	0.231	0.111	0.270
Class 8 Tractor	Low	0.075	0.064	0.060	0.060
	Mid	0.152	0.151	0.098	0.152
	High	0.301	0.301	0.143	0.349

O&M costs based on literature data as available

Alternative powertrain costs scaled based on ratio between Diesel Bus and the alternative powertrain Bus if no data was available

Diesel, HEV, PHEV set to be the same based on comparative studies

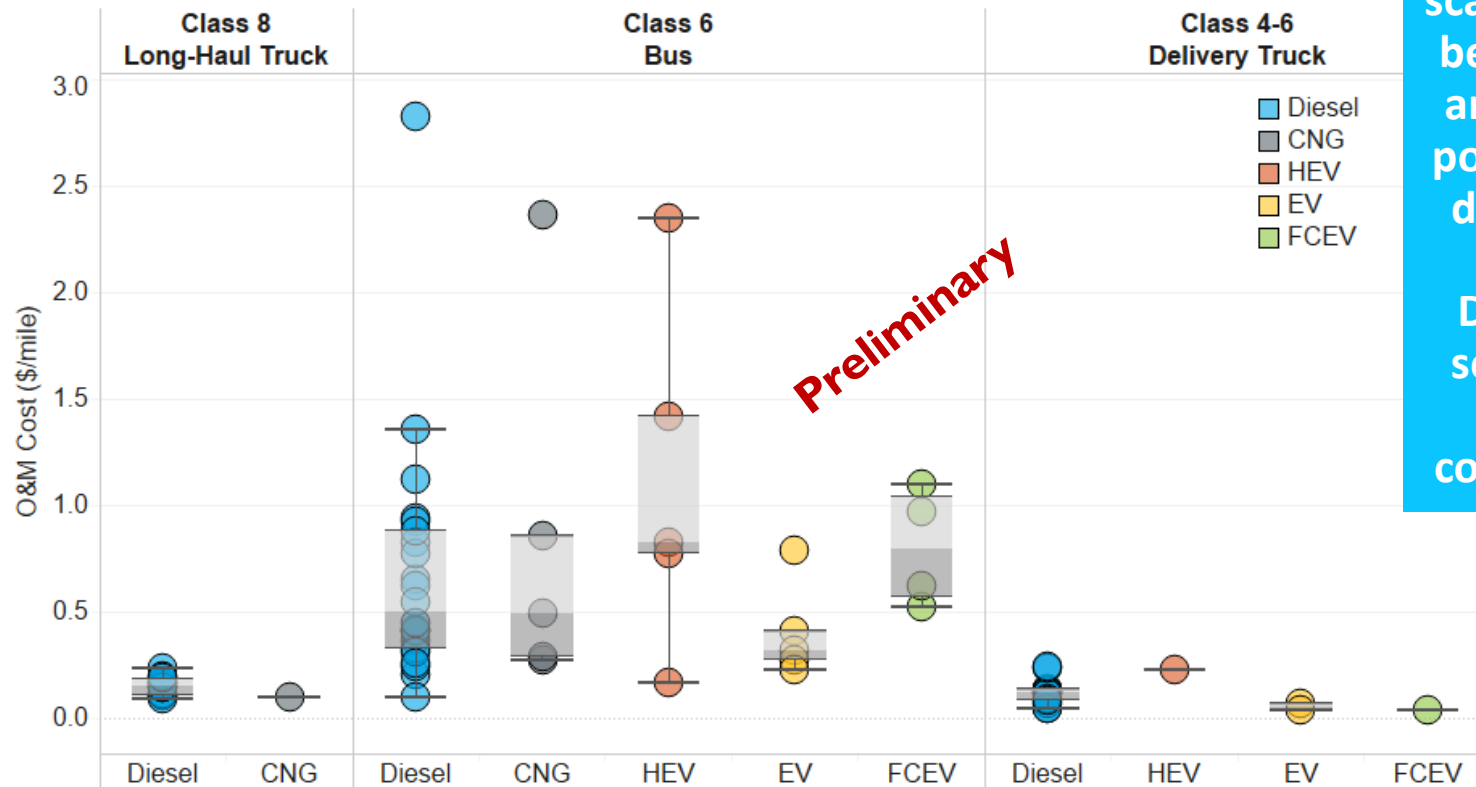

Dwell time cost based on refueling rates, fuel storage size, and hourly dwell time cost

Refueling Rates for CNG, FCEV, and EV

	CNG (gge/min)	FCEV (kg/min)	EV (kW)	Industry Scenario
Low	-	-	-	Day trip with refueling/recharging overnight
Mid	8	10	1000	Continuous (team) driving, refueling/recharging as needed. Ideal refueling/recharging rate
High	4	5	500	Continuous (team) driving, refueling/recharging as needed. Unideal refueling/recharging rate

Lower Limits on Refueling Times

	Diesel, HEV, CNG, FCEV (min)	EV and PHEV (min)
Low	-	-
Mid	5	30
High	10	60


Dwell (refueling or recharging) time based on industry reported values, NREL research, and claimed targets (Nikola, Tesla).

A constant rate of \$75/hr was used in this analysis.

Payload opportunity costs estimated to account for lost cargo capacity from heavier powertrains

Bound	Industry Scenario
Low	No cost, volume limited LTL shipment
Mid	Typical freight class, origin/destination, and weight break
High	High freight class, unattractive origin/destination, and low weight break

2002 VIUS showing VMT fraction by typical payload indicates strong possibility of being weight-limited

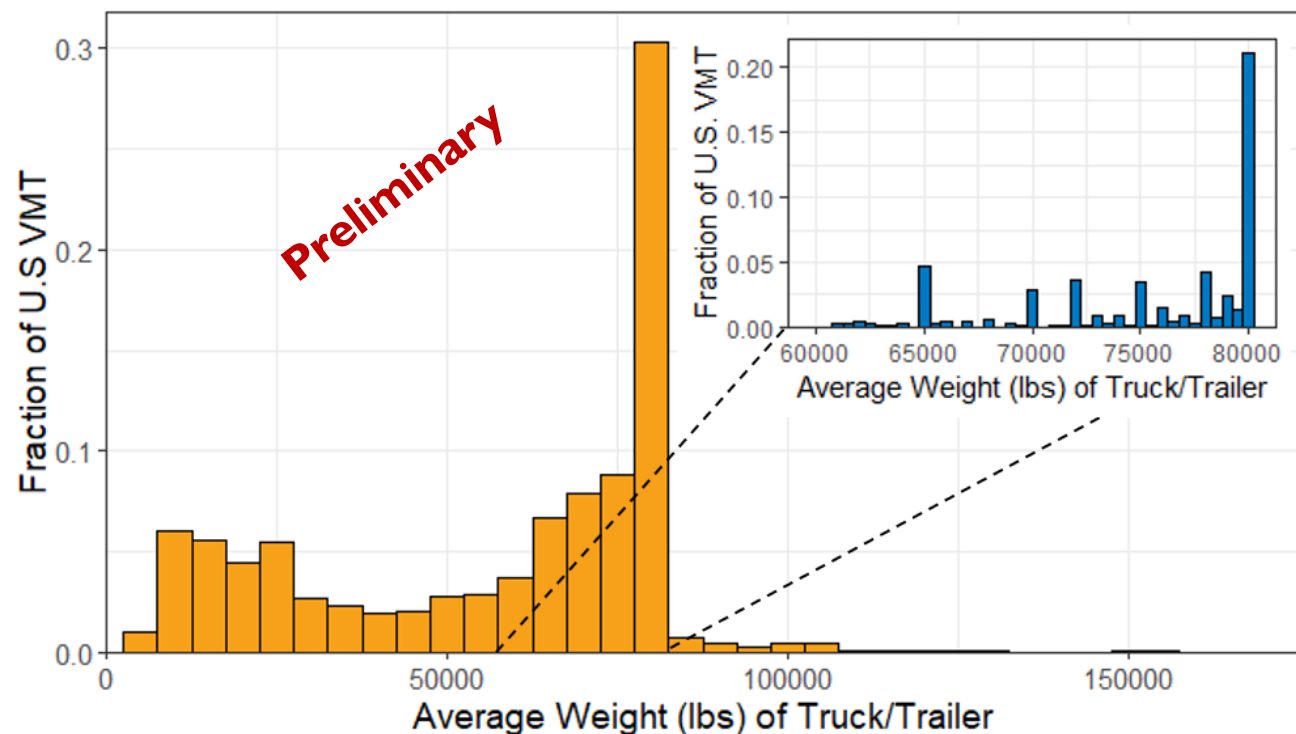

Payload costs account for Federal Law allowing 2,000lb capacity exceedance on Class 8 GVWR (up to 82,000lbs)

Cost of lost payload based on \$/lb-mi costs estimated for each vehicle based on that vehicle's total operating cost

Levelized cost of “buying” an additional, equivalent truck is used to estimate lost payload costs

Class 8 Long Haul (750 mile range) Payload Cost Range

Model Year	Bound	HEV (\$/mile)	CNG (\$/mile)	EV (\$/mile)	FCEV (\$/mile)
2018	Low	0	0	0	0
	Mid	0	0.002-0.004	1.745-3.948	0.06-0.12
	High	0	0.002-0.004	1.877-4.097	0.067-0.126
2025	Low	0	0	0	0
	Mid	-0.001--0.001	0 - -0.001	0.477-1.055	0.019-0.036
	High	-0.001--0.001	0 - -0.001	0.527-1.12	0.022-0.038
Ultimate	Low	0	0	0	0
	Mid	-0.003--0.002	0	0.028-0.054	0
	High	-0.003--0.002	0	0.034-0.061	0

Payload costs based on cost to buy an equivalent truck in that region

Payload costs thus depend on region since fuel price depends on region

Payload costs decrease over time as advanced powertrain weight decreases

Class 8 Long Haul (300 mile range) Payload Cost Range

Model Year	Bound	HEV (\$/mile)	CNG (\$/mile)	EV (\$/mile)	FCEV (\$/mile)
2018	Low	0	0	0	0
	Mid	0	0	0.167-0.357	0
	High	0	0	0.192-0.385	0
2025	Low	0	0	0	0
	Mid	-0.002--0.001	0	0.044-0.09	0
	High	-0.002--0.001	0	0.052-0.101	0
Ultimate	Low	0	0	0	0
	Mid	-0.003--0.002	0	0	-0.008--0.005
	High	-0.004--0.002	0	0	-0.009--0.006