UT-BATTELLE

DOE Hydrogen Program

Microstructural Characterization of PEM Fuel Cell MEAs

Karren L. More, Larry Allard, and Shawn Reeves

Oak Ridge National Laboratory

June 10, 2008

This presentation does not contain any proprietary, confidential, or otherwise restricted information

Project ID FC9

Project Overview

Timeline

- Project initiated in FY2000
- Continuous - fundamental research on microstructural characterization to improve MEA durability

Barriers

- Fuel Cell Barriers Addressed
  - A: Durability
  - B: Cost
  - C: Performance

Budget

- Total Funding to date - ~$1.9M
- Funding in FY07 - $300k

  plus $400k capital towards purchase of new $2M TEM
- Funding in FY08 - $500k

  (additional funding in FY08 to support in-situ microscopy development for PEMFCs)

Partners

- Los Alamos National Laboratory
- Argonne National Laboratory
- Brookhaven National Laboratory
- 3M Company
- Cabot Superior MicroPowders
- United Technologies Research Ctr
- Honda Research Institute
- Rensselaer Polytechnic Institute
- Arkema

ORNL Research Objectives

- Identify high-resolution imaging and compositional/chemical analysis techniques for characterization of the material constituents comprising PEM fuel cell MEAs
  - μm- to nm-scale using FEG-SEM (bulk)
  - nm-scale imaging using TEM/STEM (atomic)
  - Z-contrast sub-A structure imaging using HAADF-STEM
  - nm-scale 3D depth-profiling and image reconstruction
  - In-situ microscopy
- Apply these analytical and imaging techniques for the evaluation of microstructural and microchemical changes that determine fuel cell stability
- Elucidate microstructure-related degradation mechanisms contributing to PEM fuel cell performance loss

Milestones

- FY07 Milestones:
  - Initiate a new collaboration with an industrial/university/laboratory partner to conduct durability studies *Completed*
  - Initiate study of the mechanisms of carbon support corrosion *In progress*

- FY08 Milestones:
  - Publish results for STEM analysis of bimetallic cathode catalysts *Completed*
  - Continue study of the mechanisms of carbon support oxidation/corrosion *In progress*

Carbon support corrosion continues to be an area of interest. Techniques are being developed to evaluate this phenomenon using in-situ microscopy.

Approach: Use Advanced Imaging and Compositional Analysis Techniques to Evaluate Atomic-Scale MEA Microstructures

- Apply state-of-the-art electron microscopy techniques for the analysis of MEA material constituents:
  - High-resolution FEG-SEM - Hitachi S4800
  - High-resolution FEG-TEM/STEM imaging (*sub nm-scale*) - new Hitachi HF-3300
  - High-angle annular dark field (HAADF) imaging (Z-contrast) in an aberration-corrected STEM (*sub-A scale*) - JEOL 2200FS-AC
- Collaborate with industry, academia, and national laboratories to make these techniques (and expertise) available to correlate structure and composition with MEA processing and/or life-testing studies

Technical Accomplishments and Progress

- Advanced the HAADF-STEM technique to studying fuel cell (cathode) catalysts
- Increased external collaborations using the unique microscopy characterization facilities at ORNL
- Initiated first stages of *in situ* microscopy holder development
- Applied 3D depth-profiling STEM and image reconstruction to study catalyst and support structures

HAADF, Or Z-Contrast, STEM Is Used to Image Catalyst Particles At Sub-Ångström Resolution

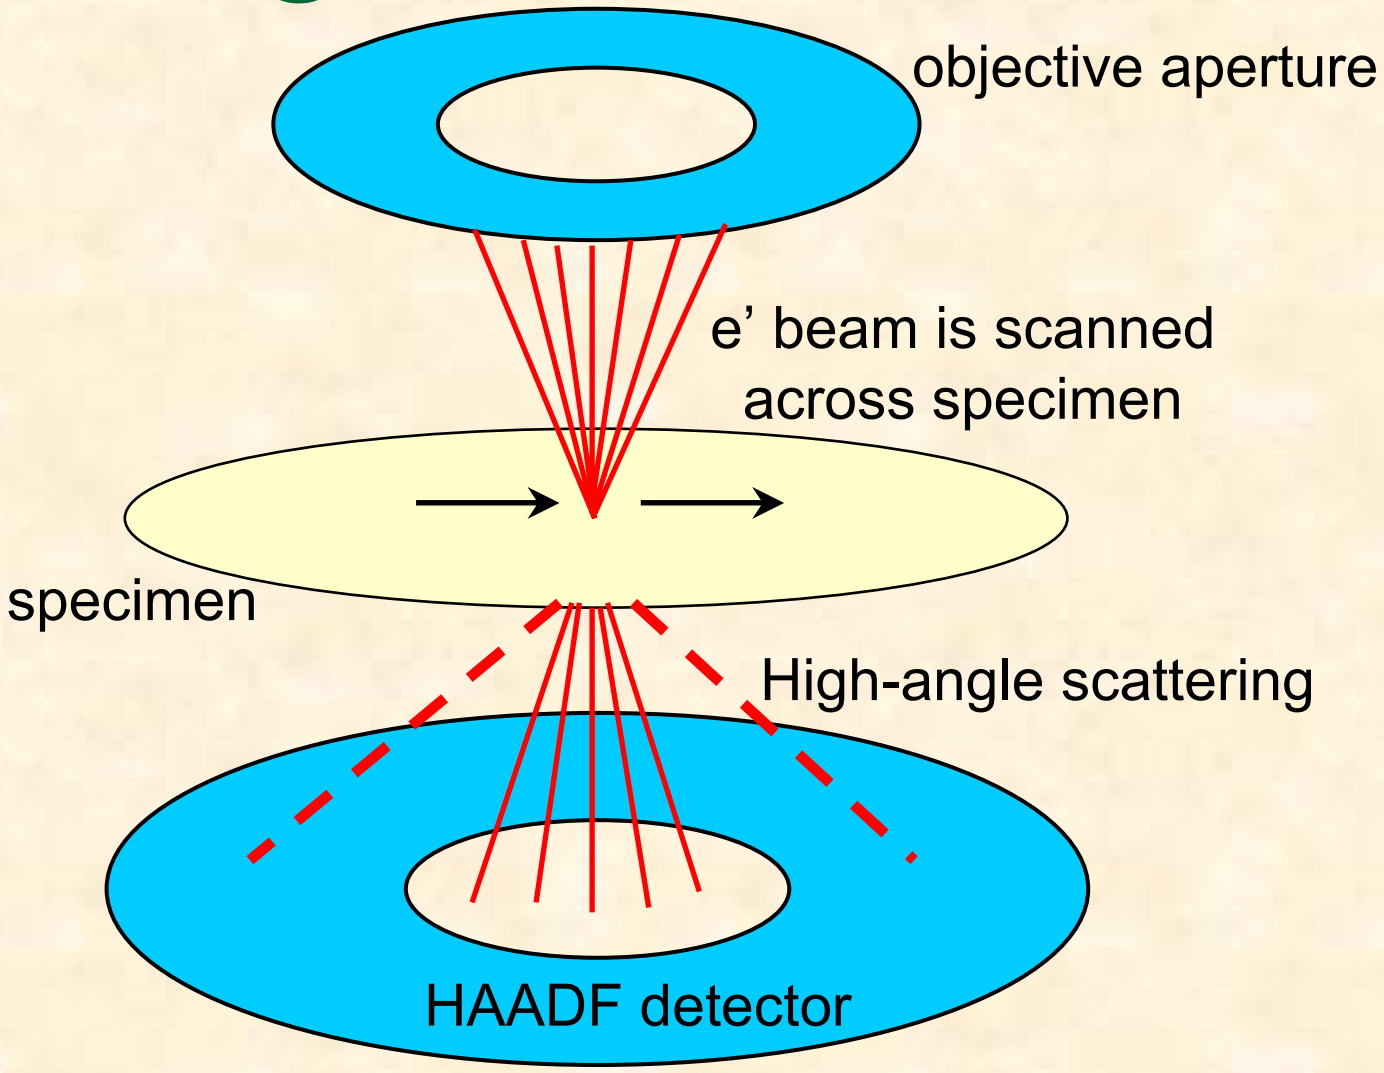

High-angle scattering depends on Z and the image contrast (intensity) will vary as Z^2

Image contrast variations arise because of atomic number (Z) differences between the elements - individual atoms comprising the particle's crystal lattice can be identified. For catalyst characterization:

(*i*) high-Z particles (Pt-based catalysts) supported on a low-Z substrate (carbon) and

(*ii*) alloy catalyst particles that are comprised of elements having a fairly large Z difference (Pt-Co, Pt-Cr, Pt-Ni, Pt-Ru, Pt-Pd, etc.)

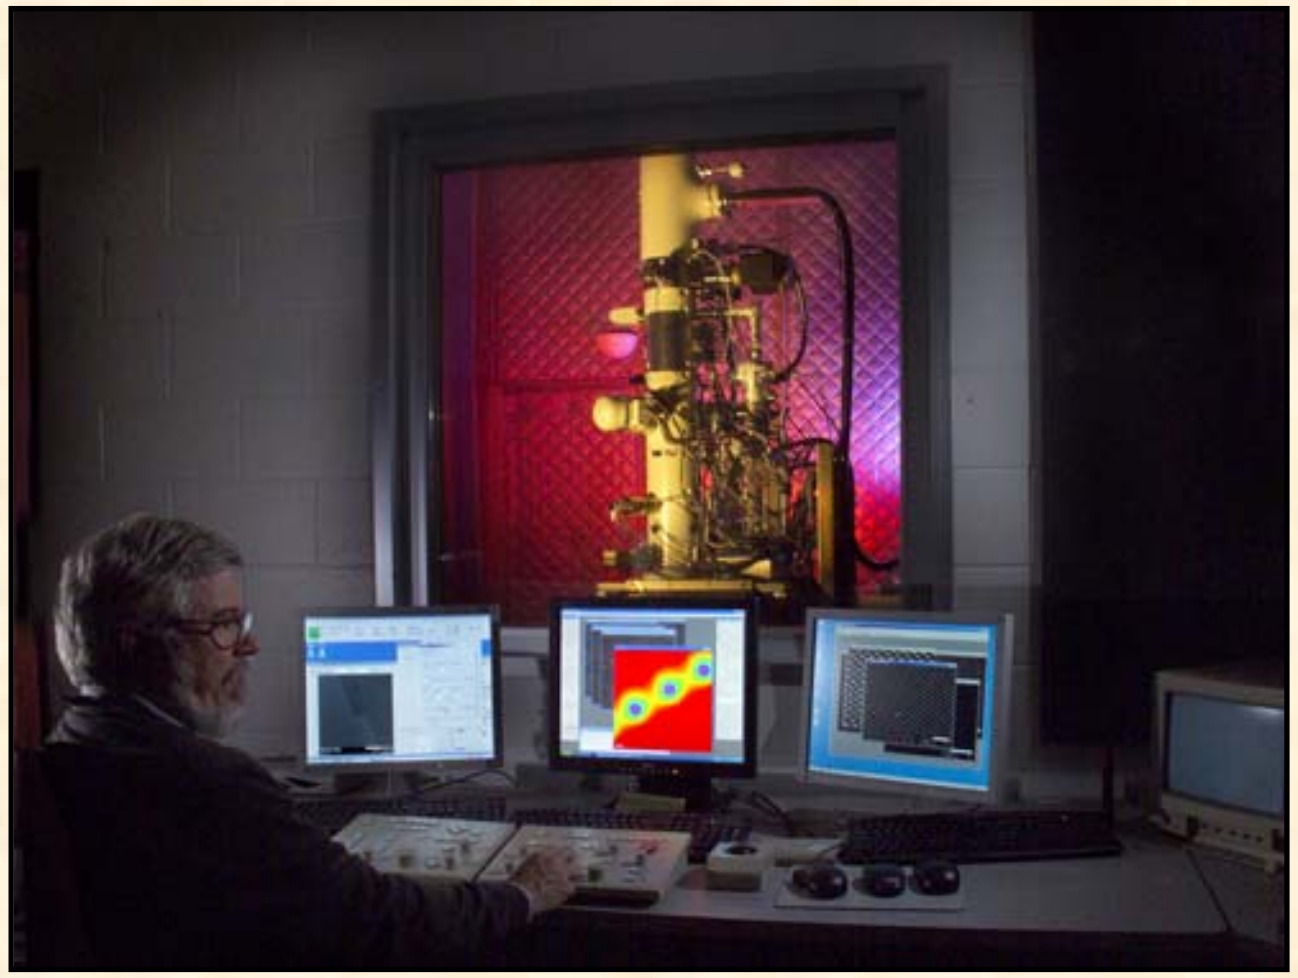

JEOL 2200FS FEG-TEM/STEM
with CEOS aberration-corrector

There is a Direct Correlation Between BF-TEM/STEM and HAADF-STEM Images Since Both are Acquired Simultaneously

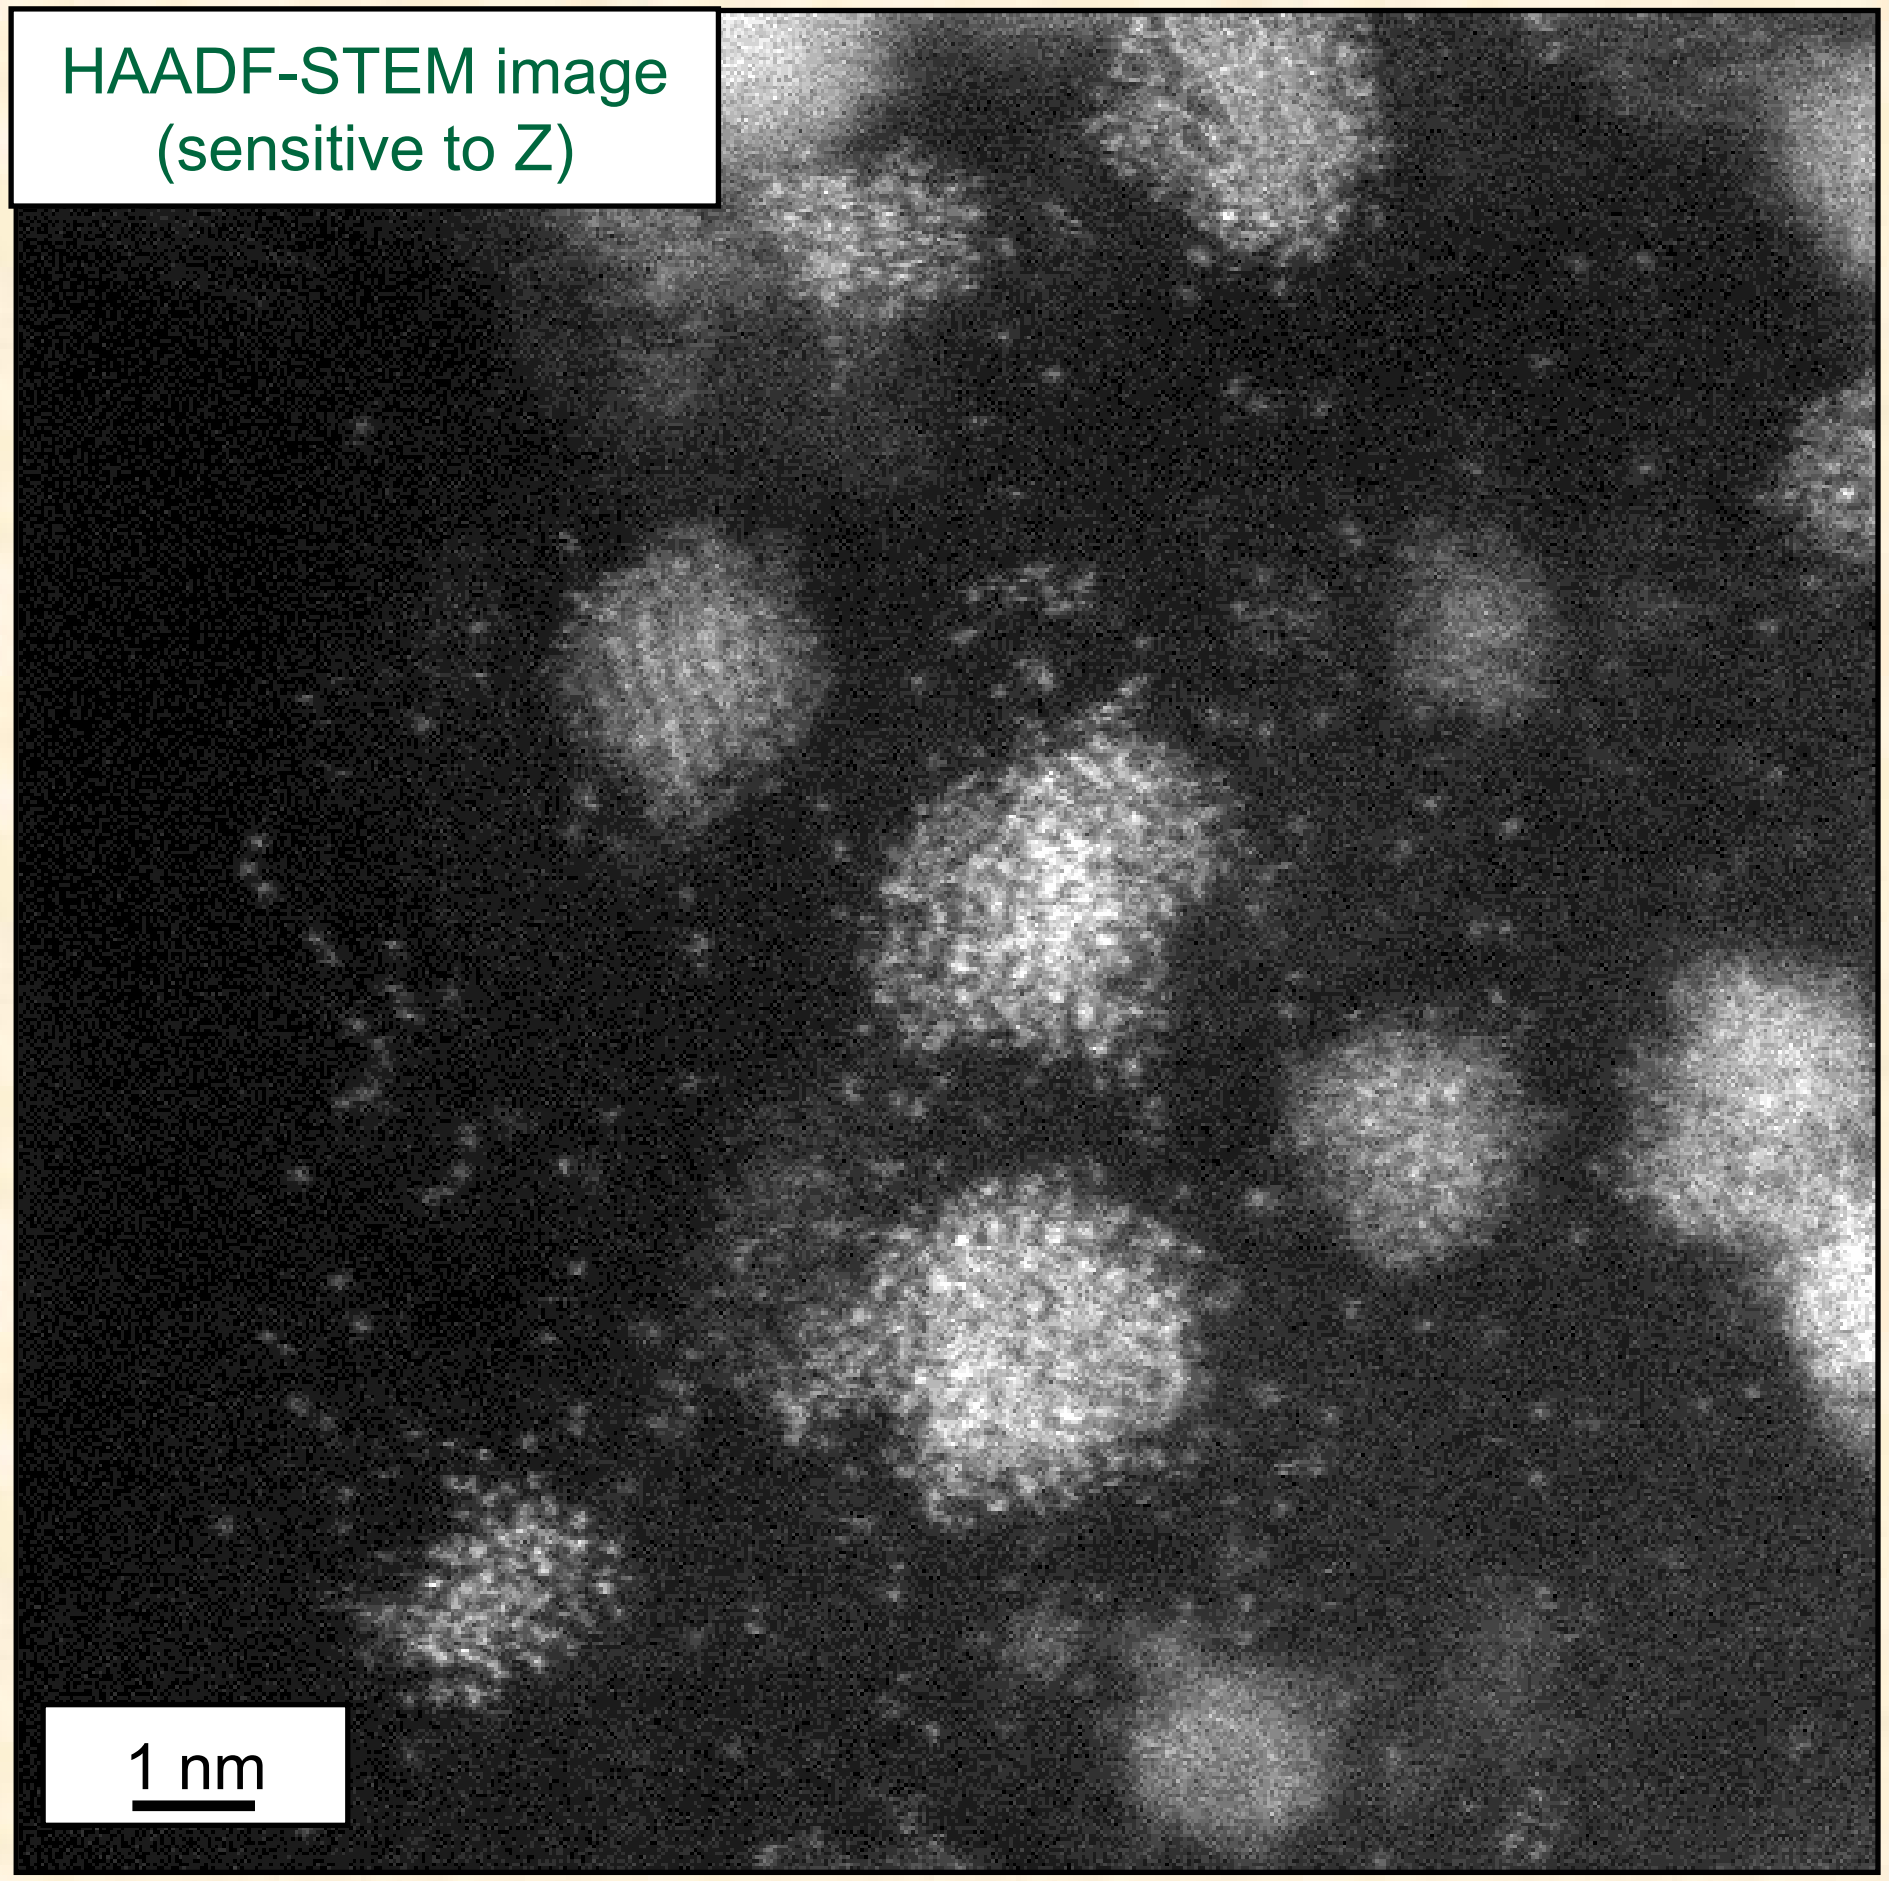

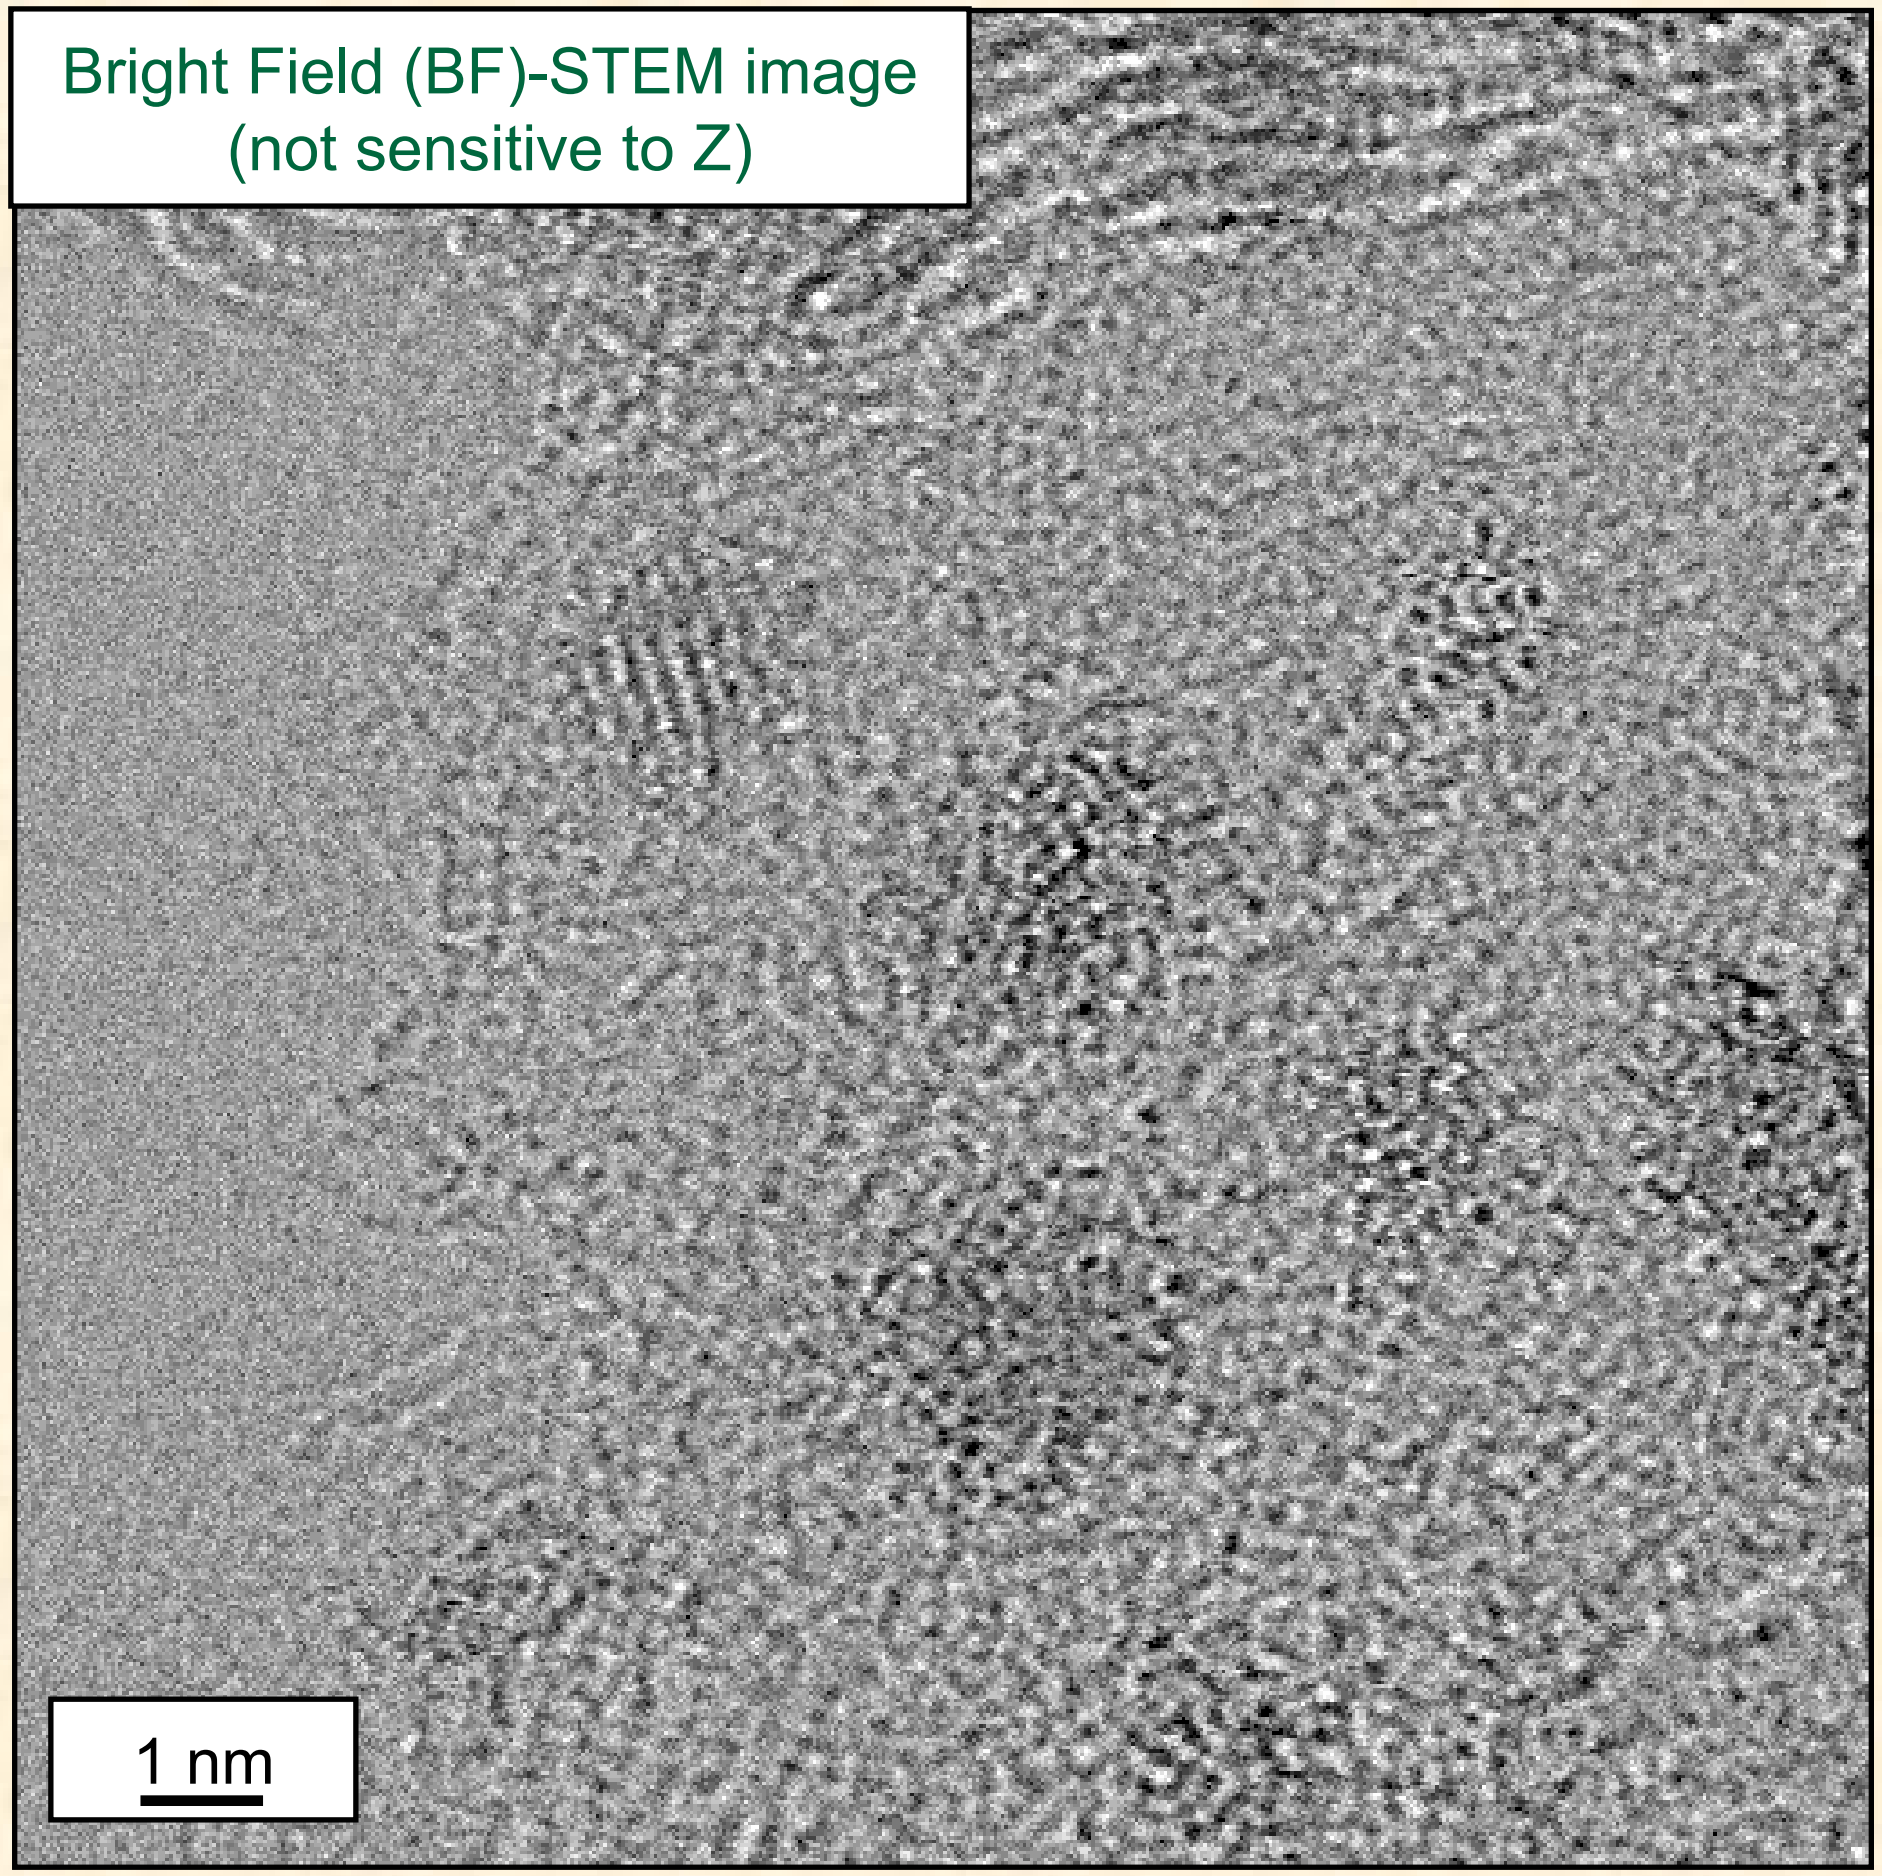

There is a Direct Correlation Between BR-TEM/STEM and HAADF-STEM Images Since Both are Acquired Simultaneously

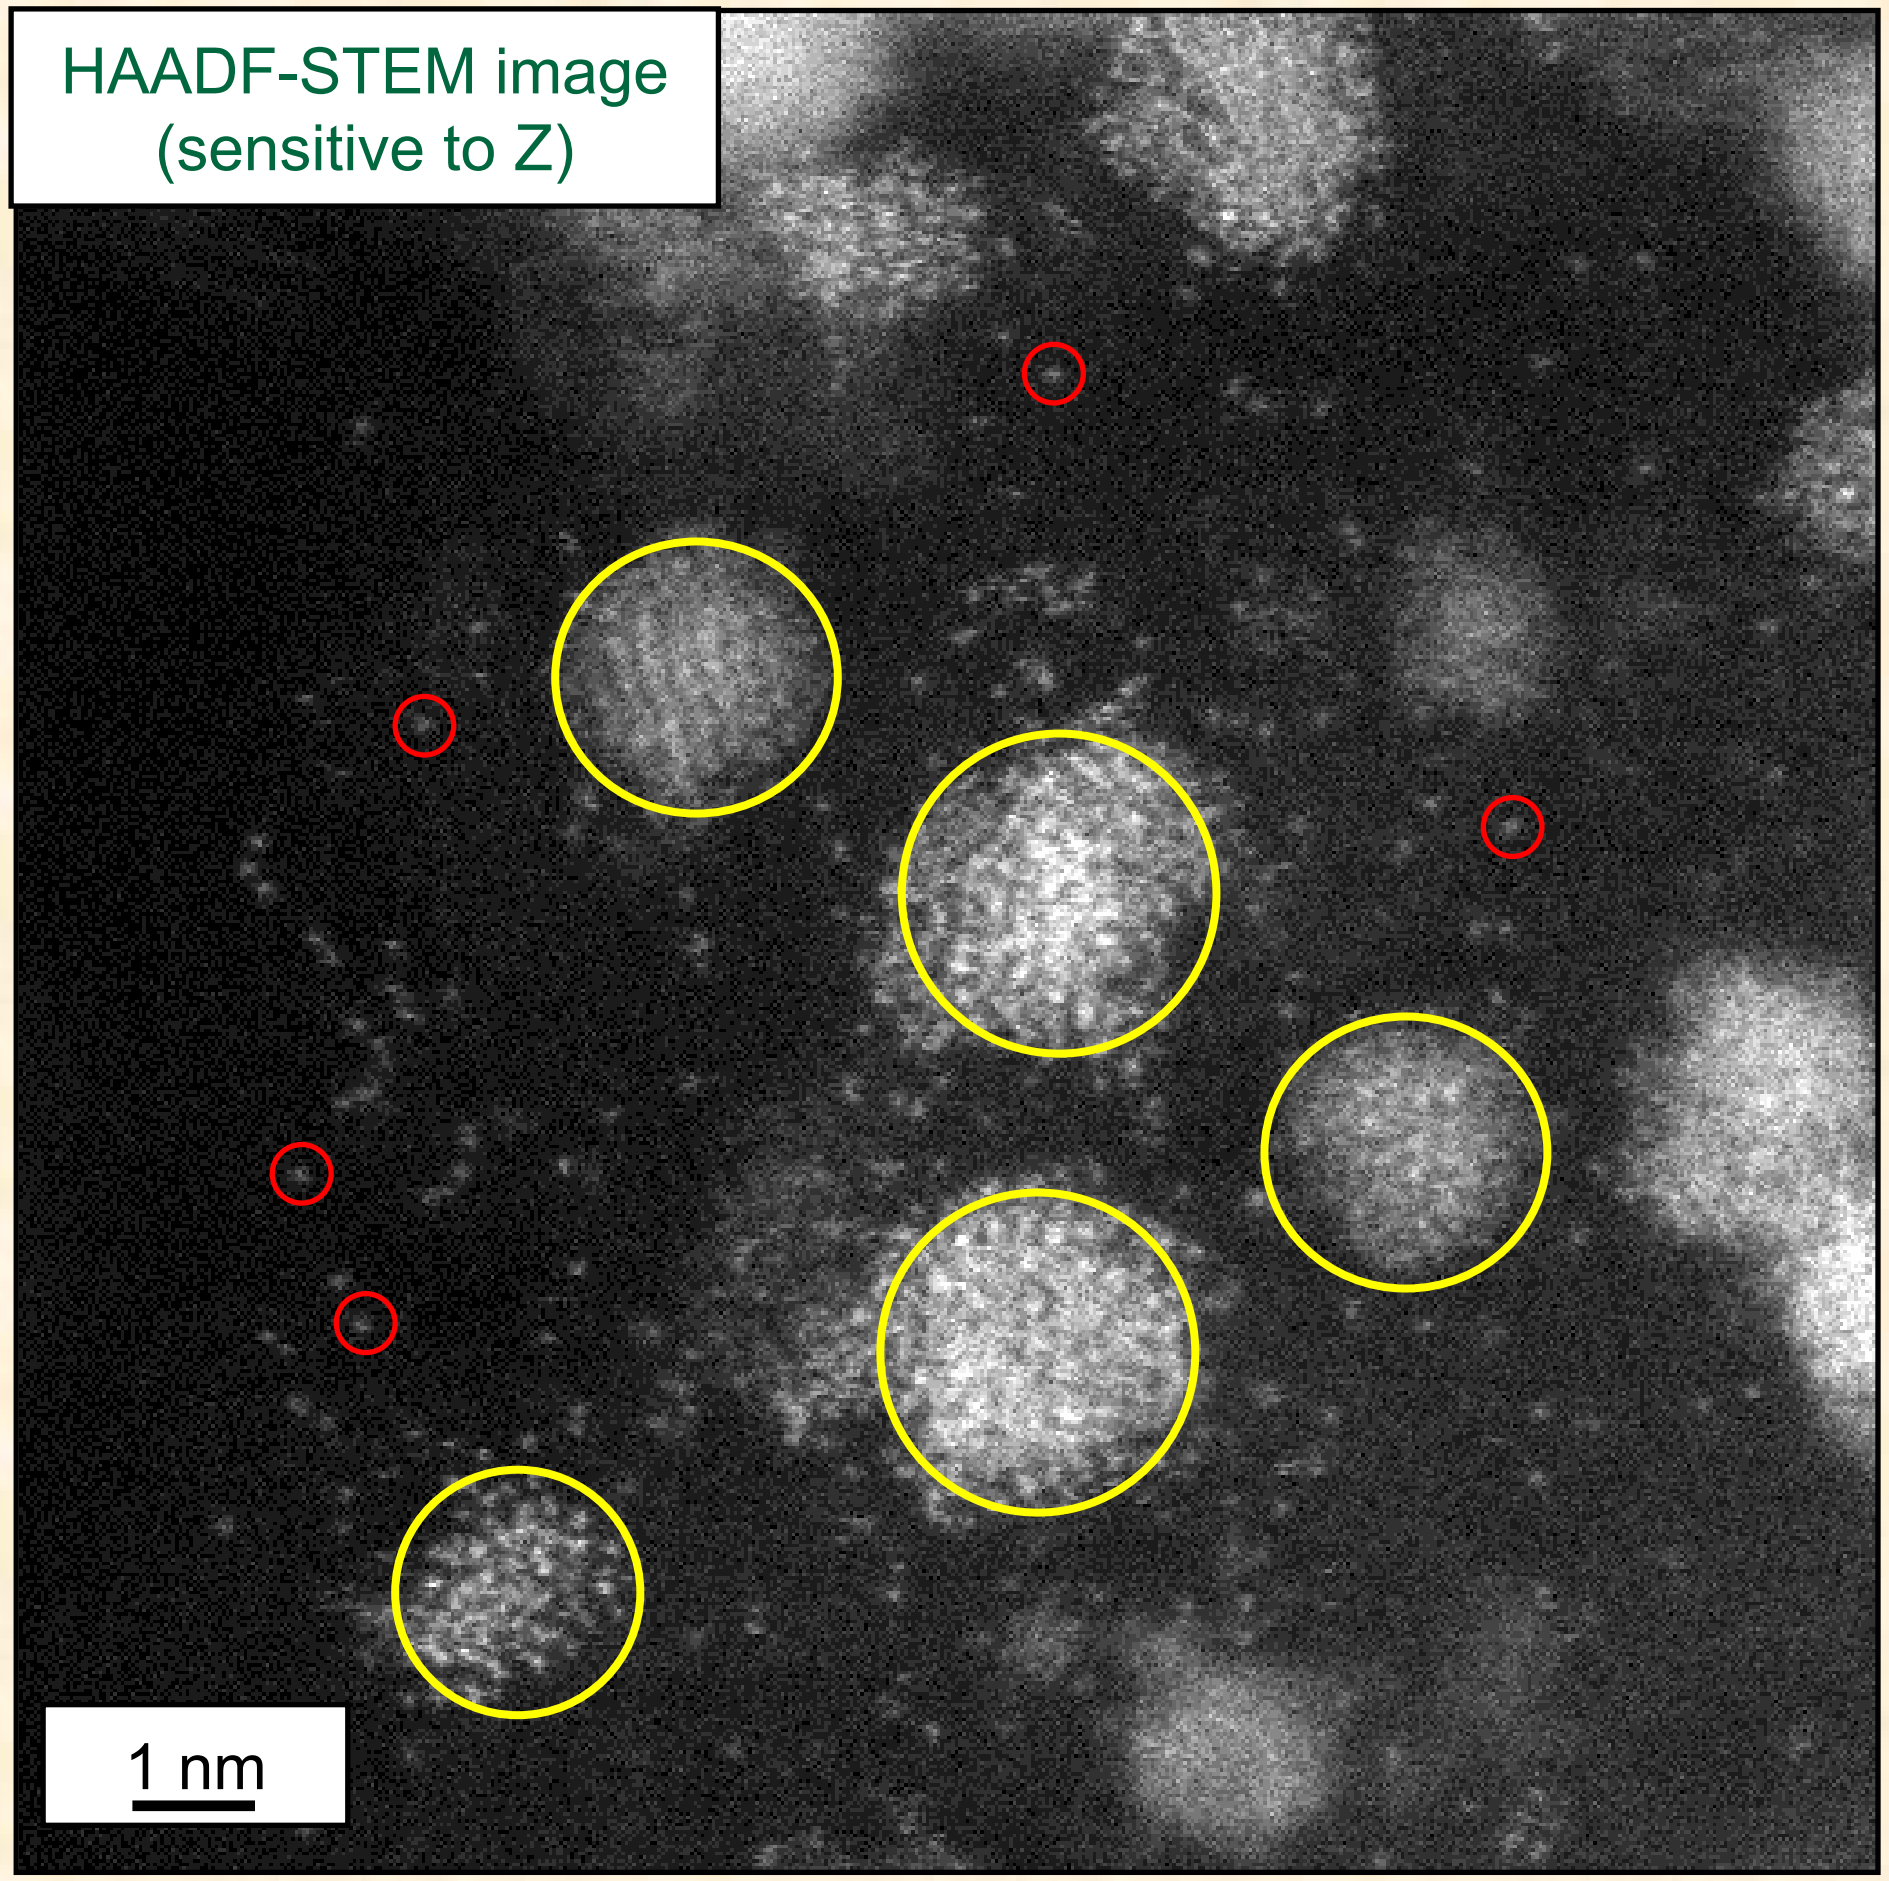

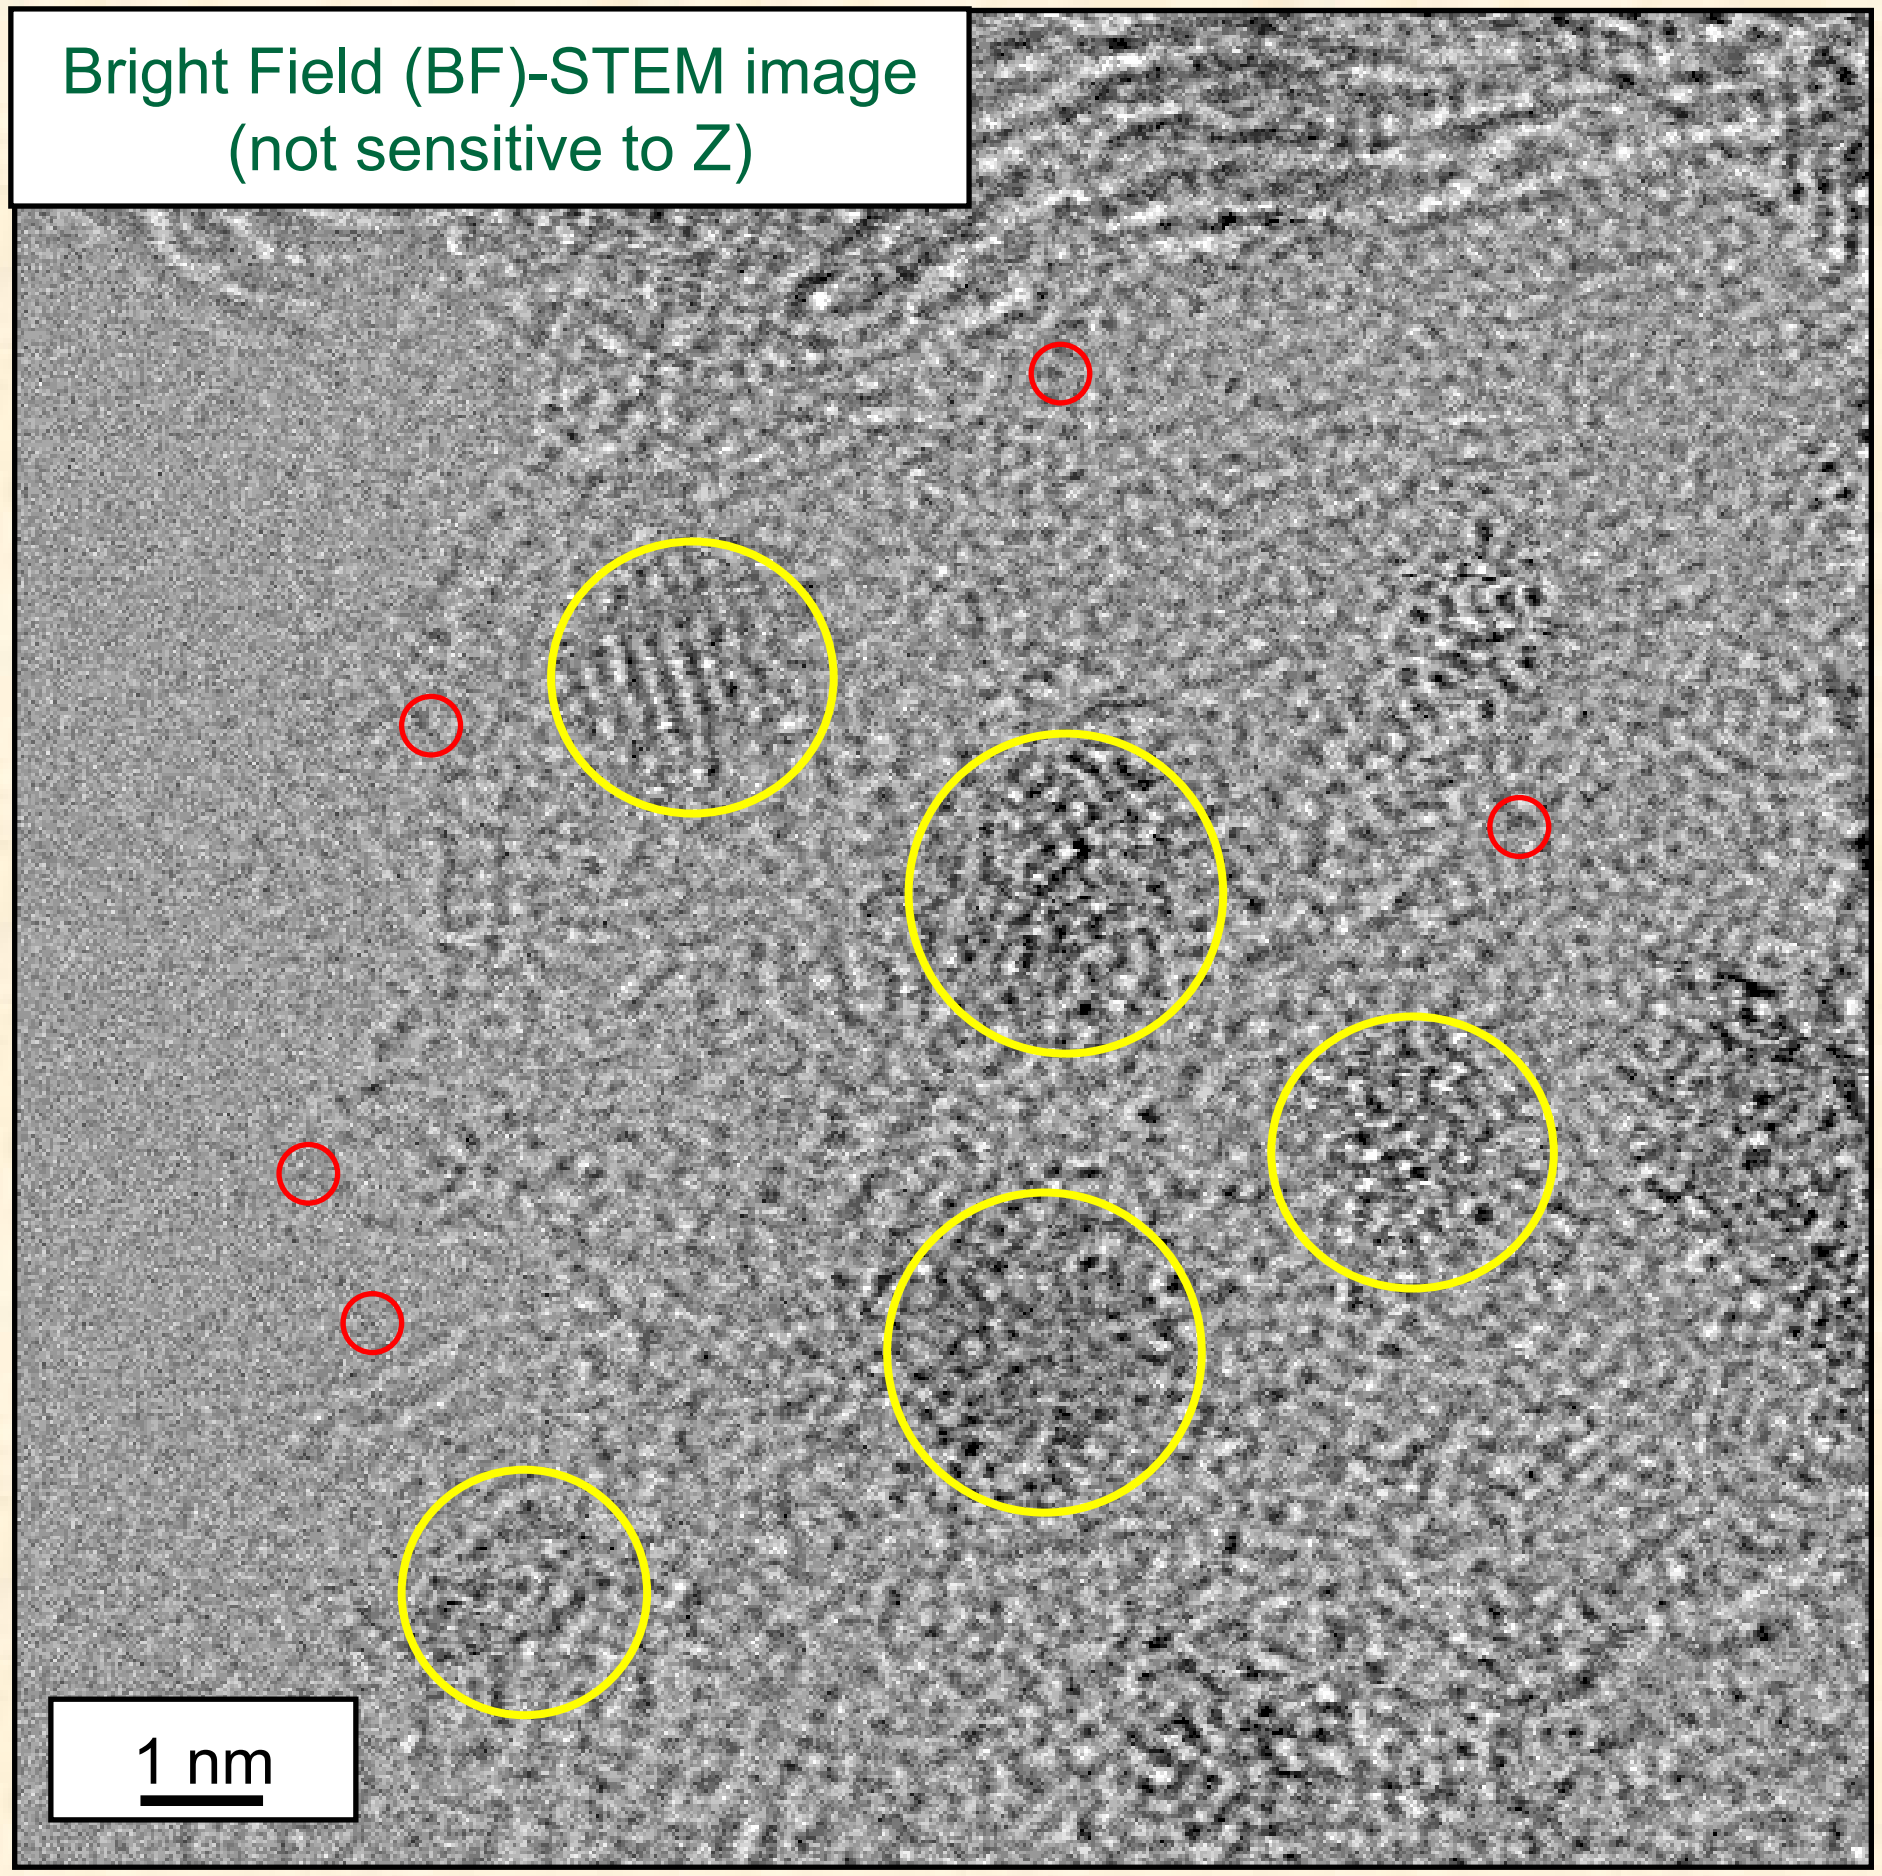

TEM/STEM Heating Holder for In-Situ Microscopy

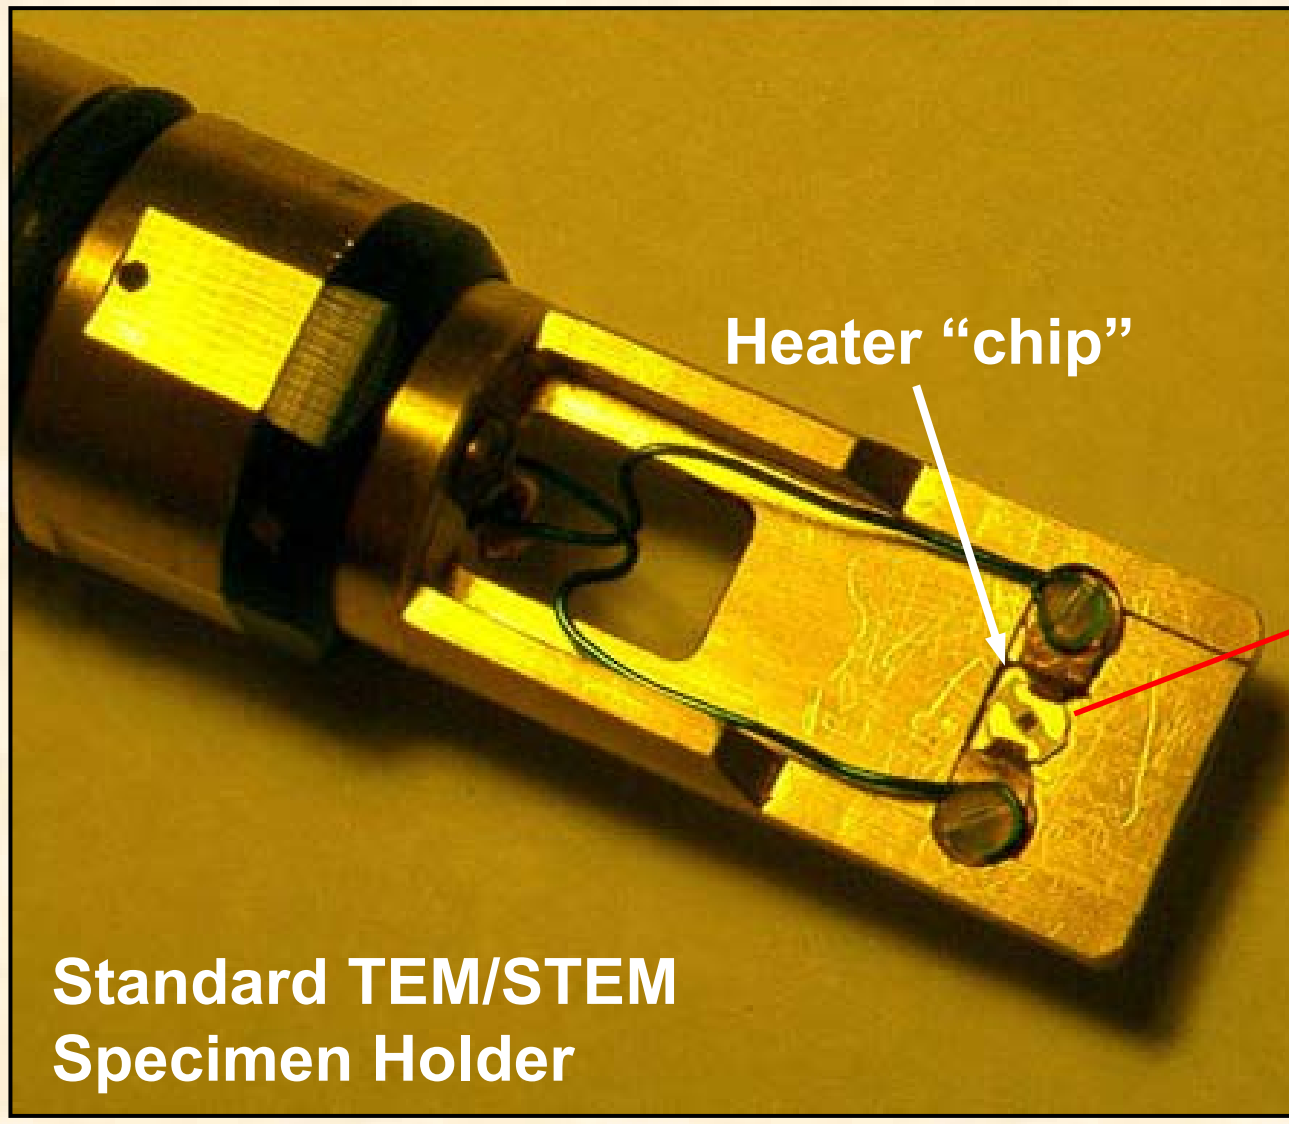

"Baseline" heater device

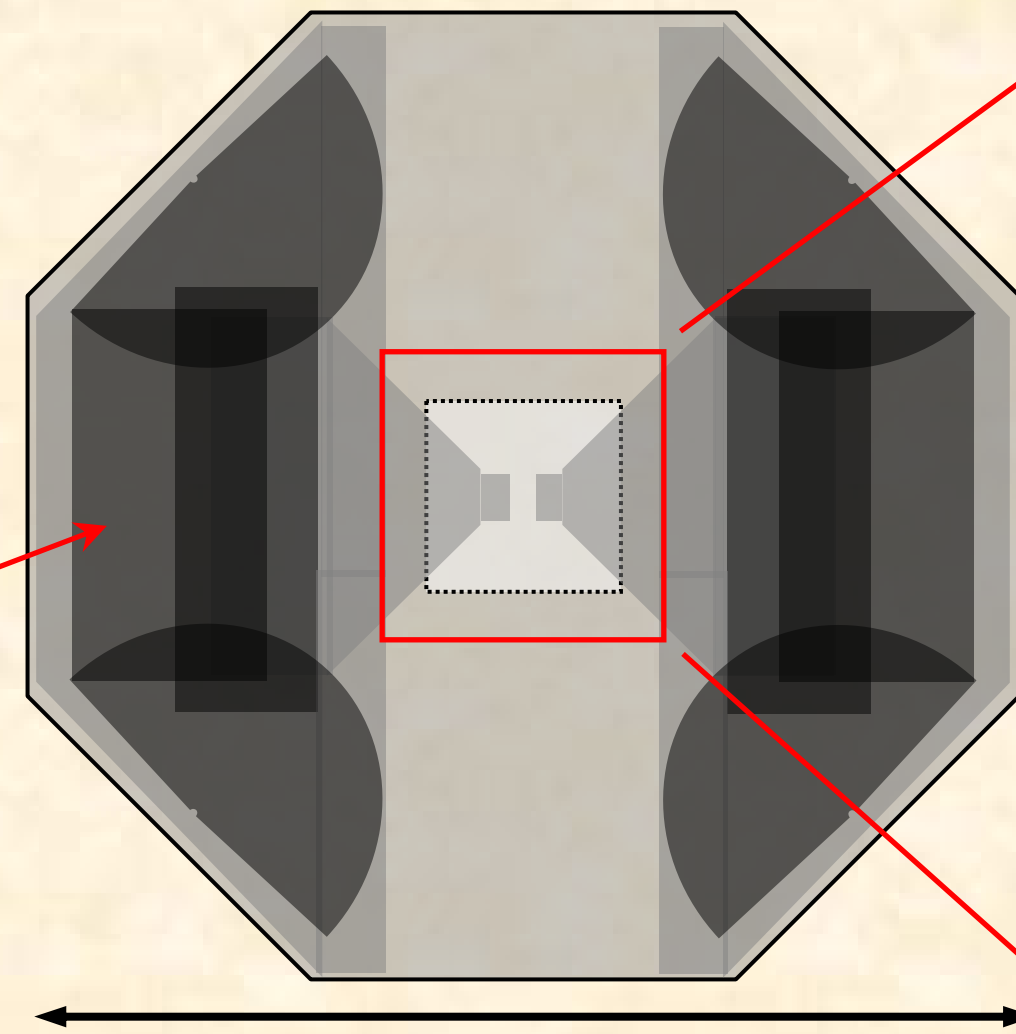

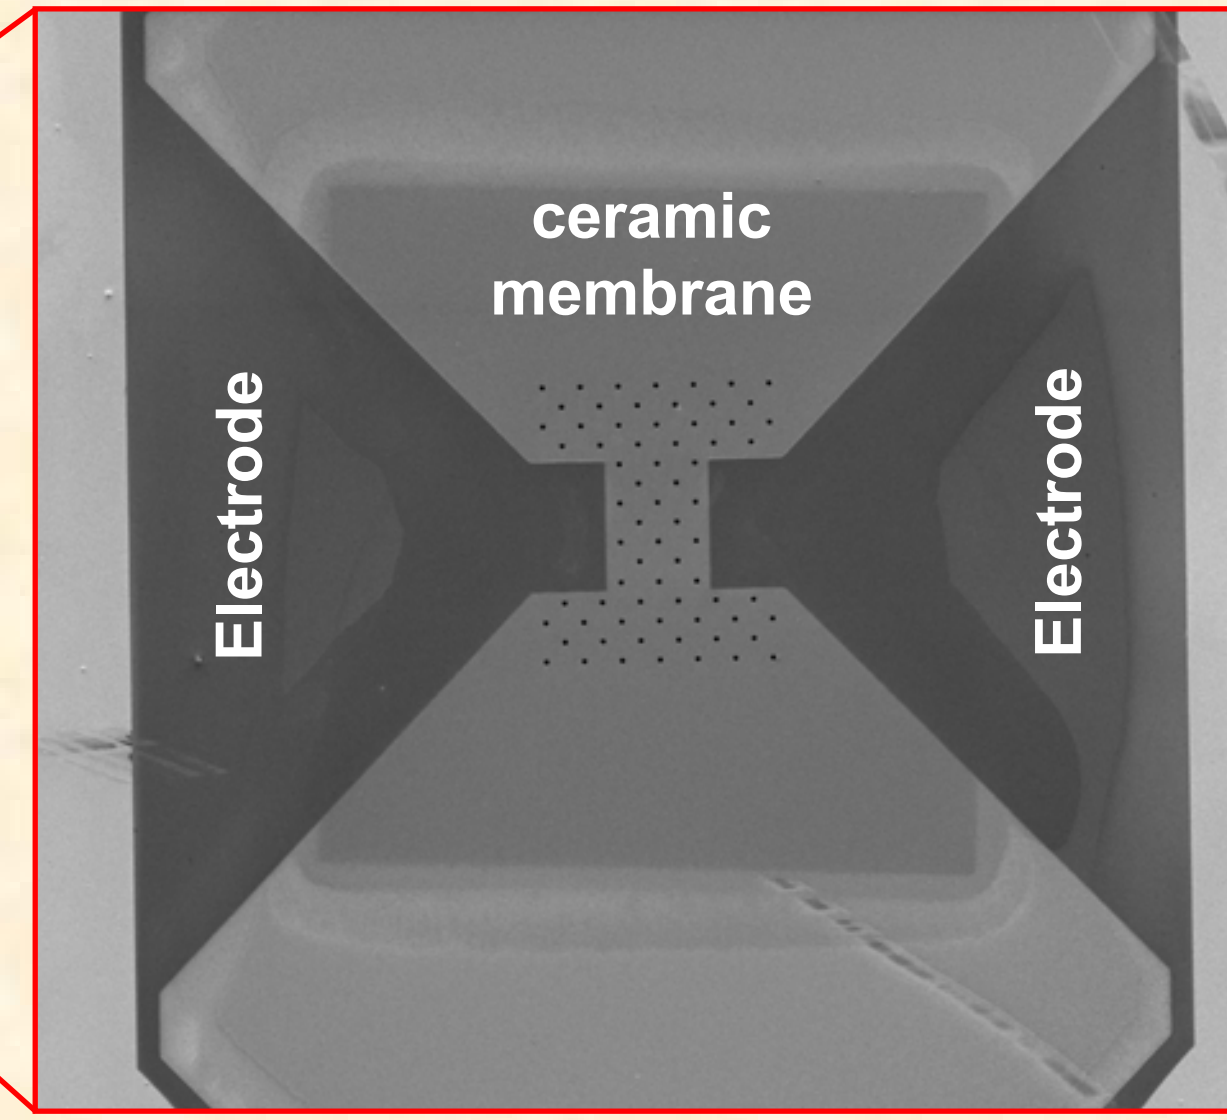

Protochips Co. provides novel heating elements based on semiconductor technology.

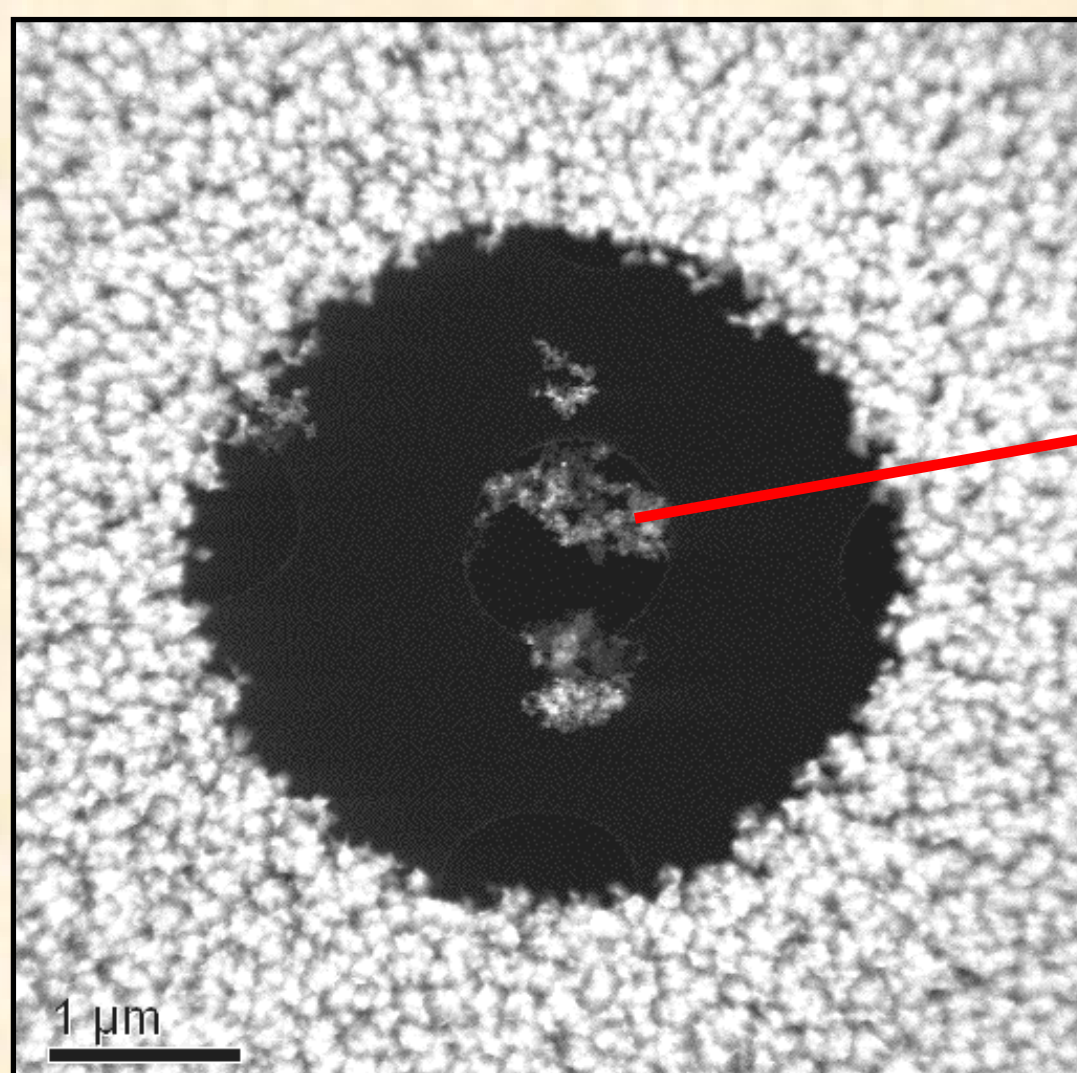

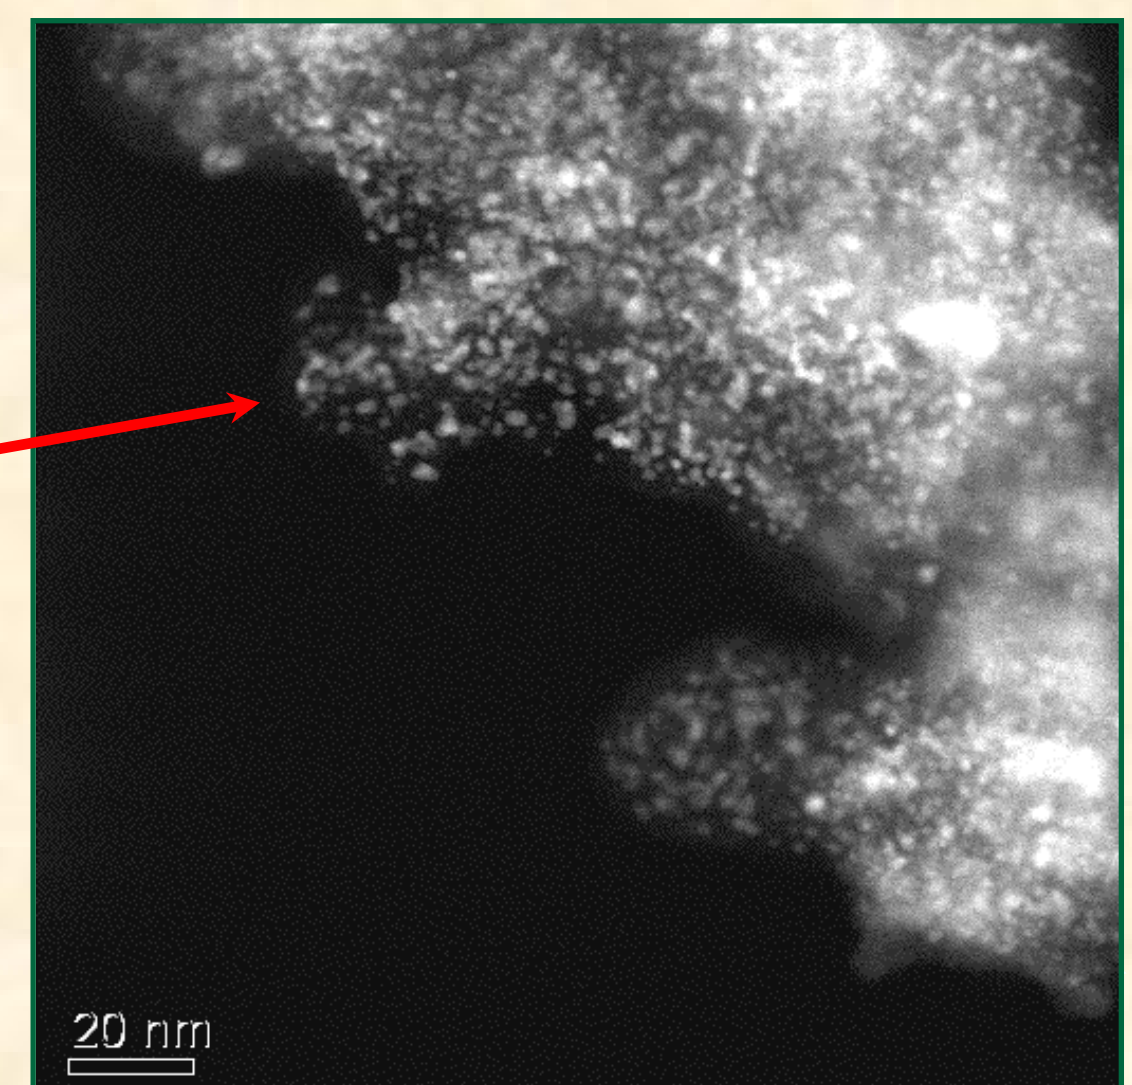

Pt/C Heated In-Situ To 150°C:

8 X 1.5 min hold
3 X 12 min hold
1 X 24 min hold

Starting Pt particle size/dispersion

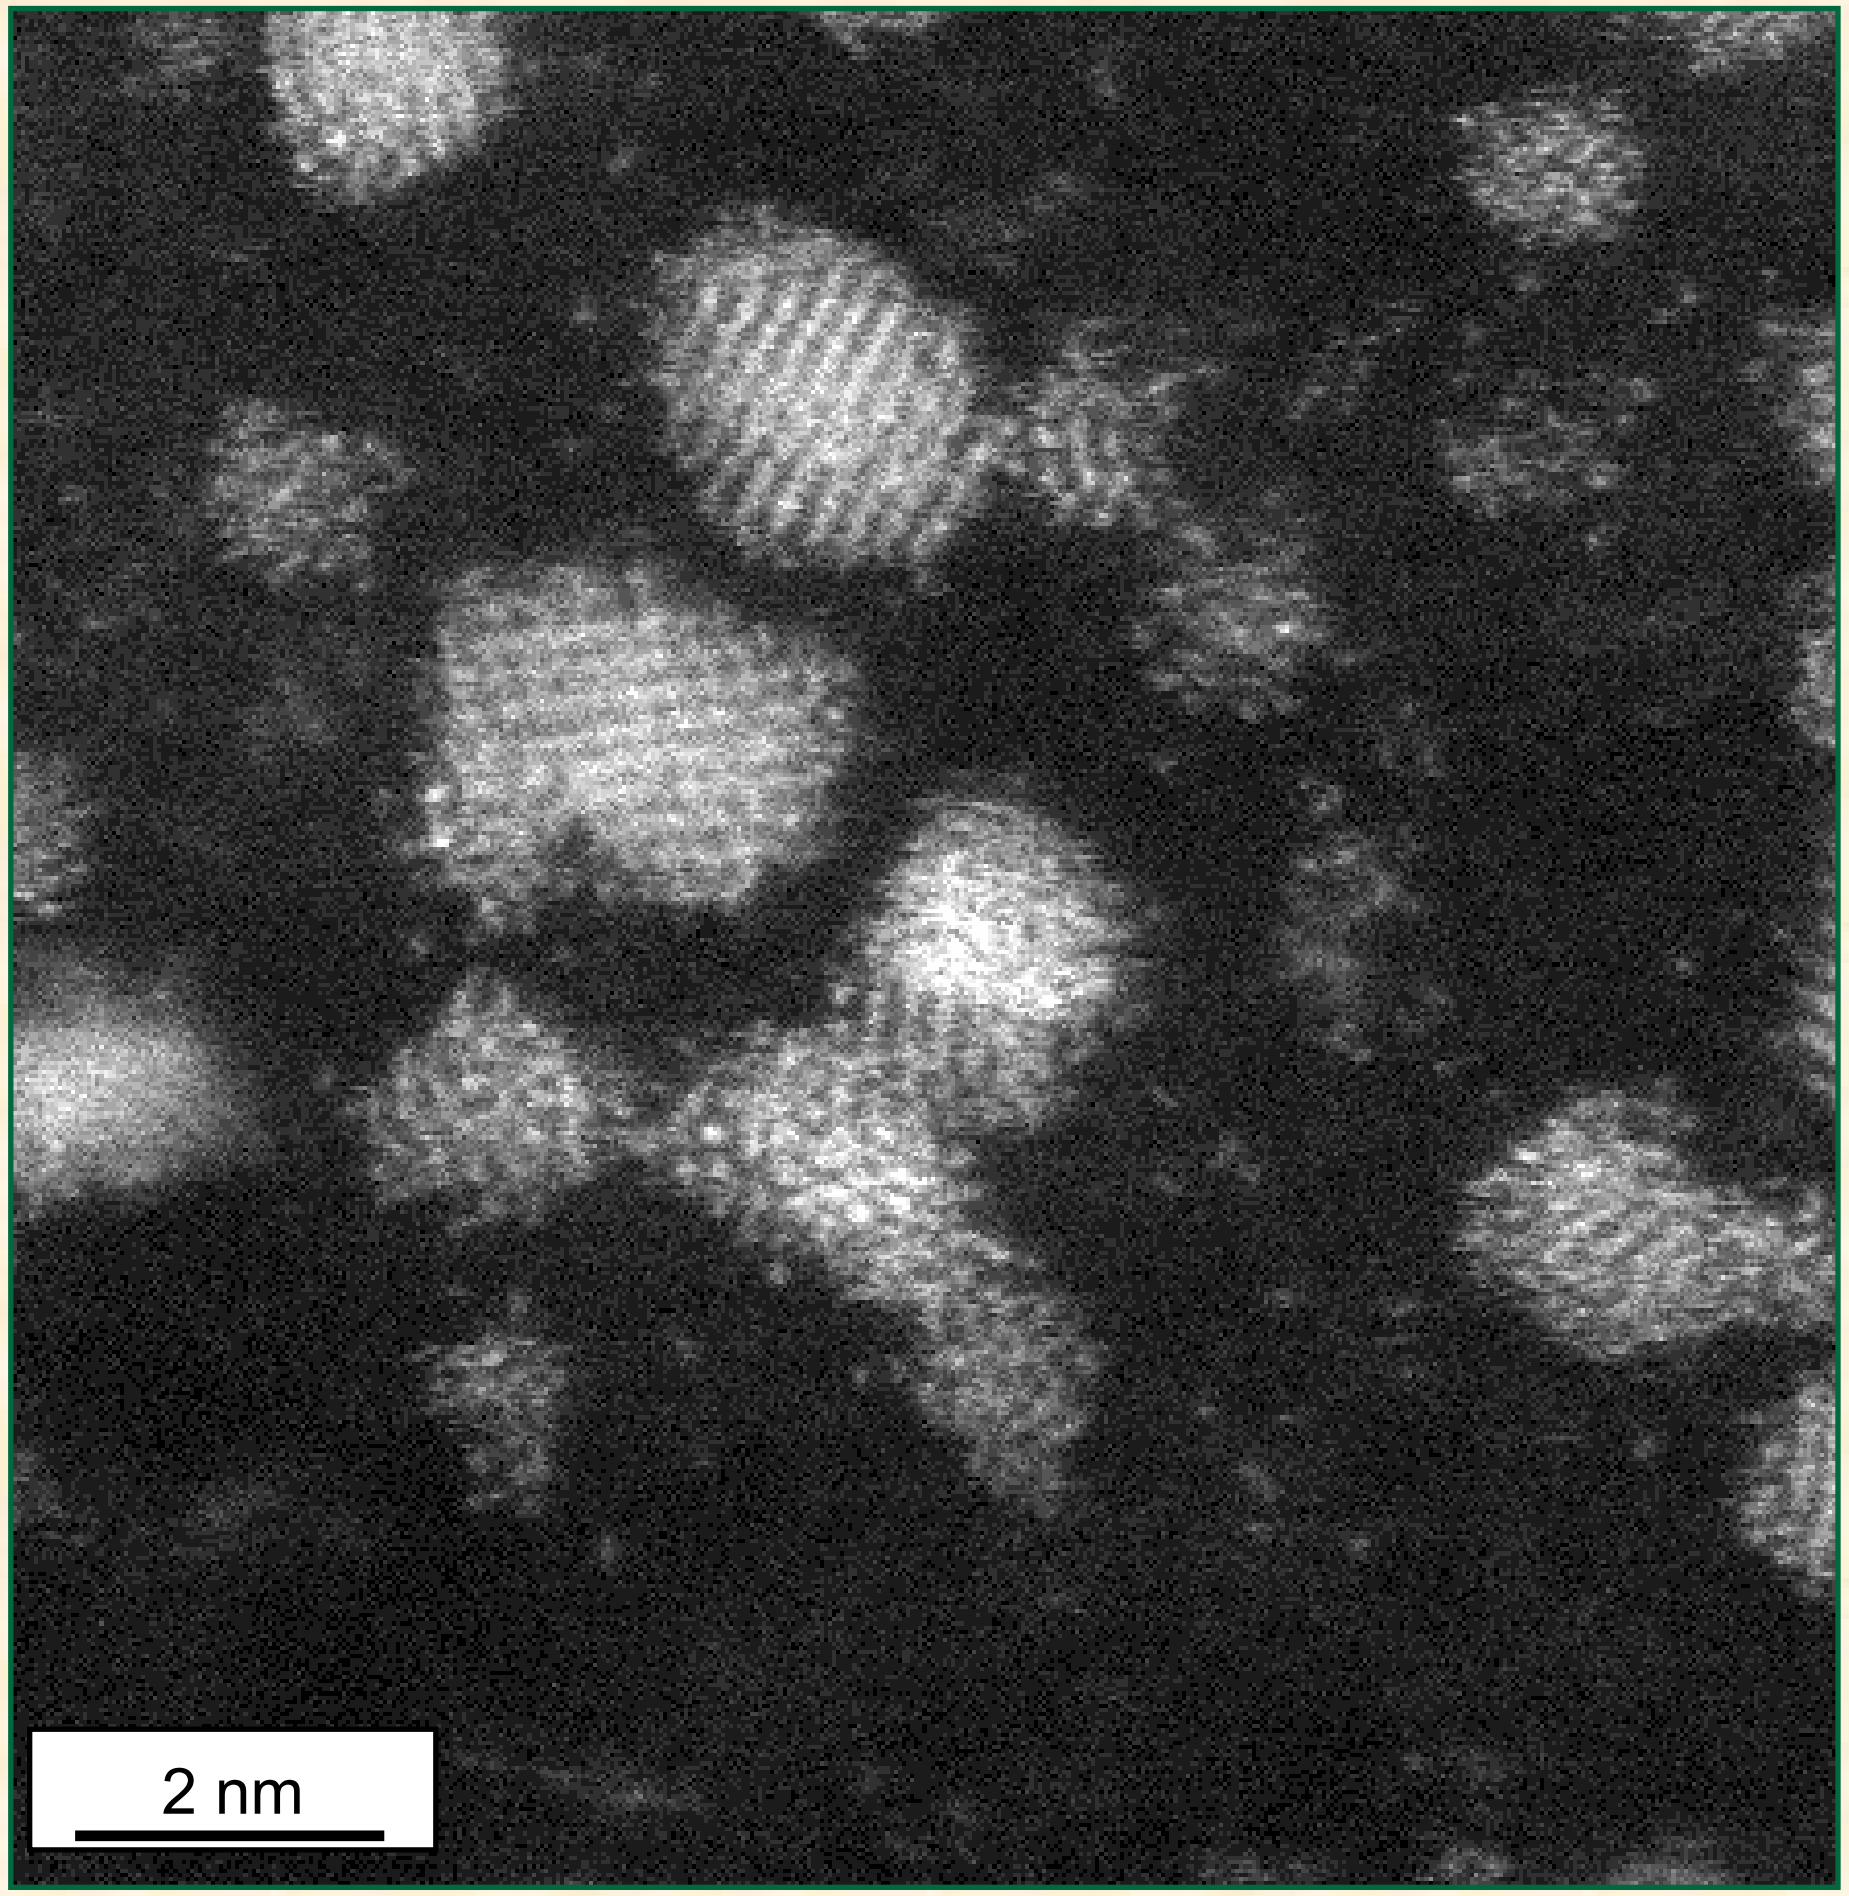

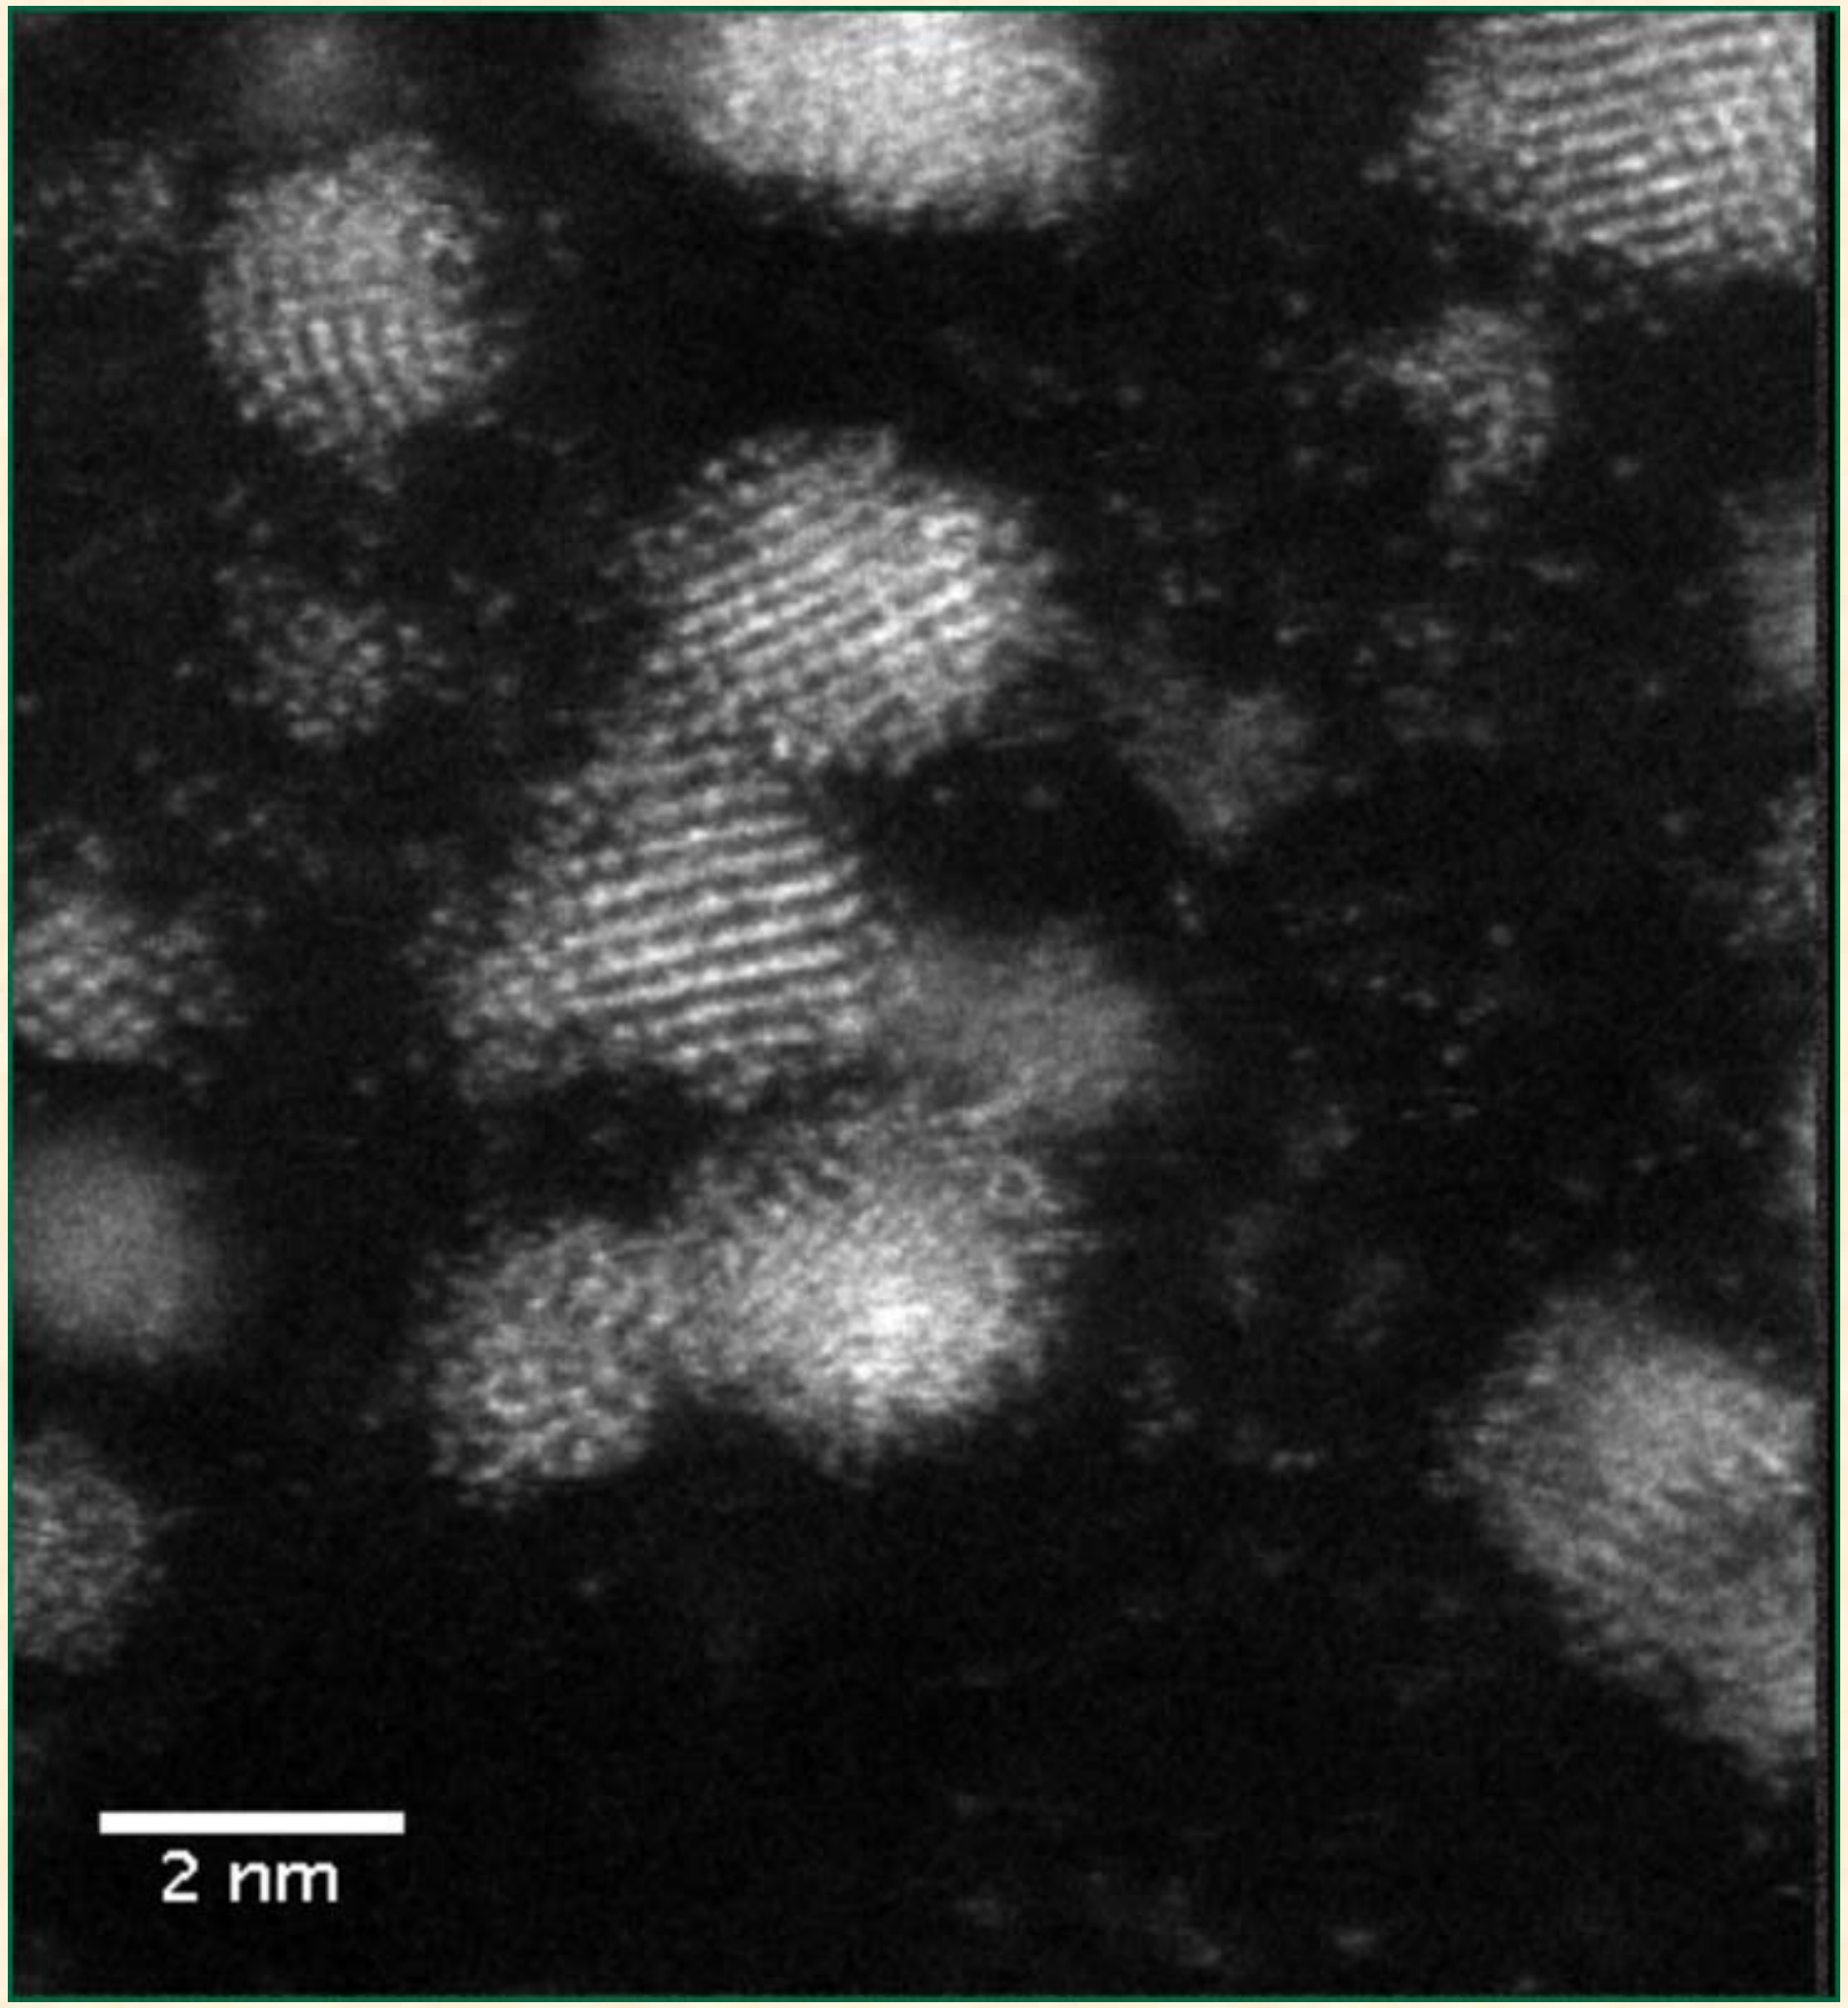

Pt Particle Coalescence Observed During Heating Pt/C for Only 48 min @150°C

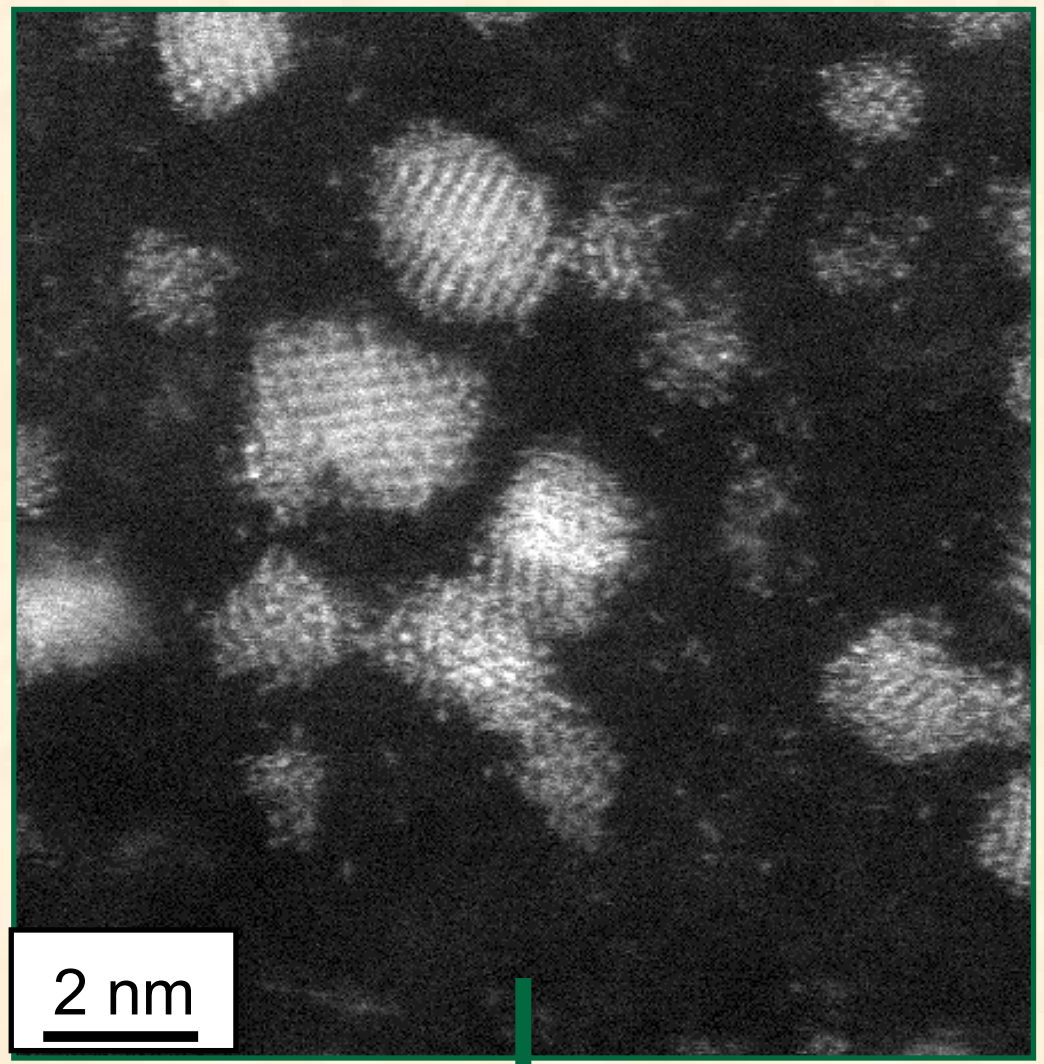

48 min @ 150°C

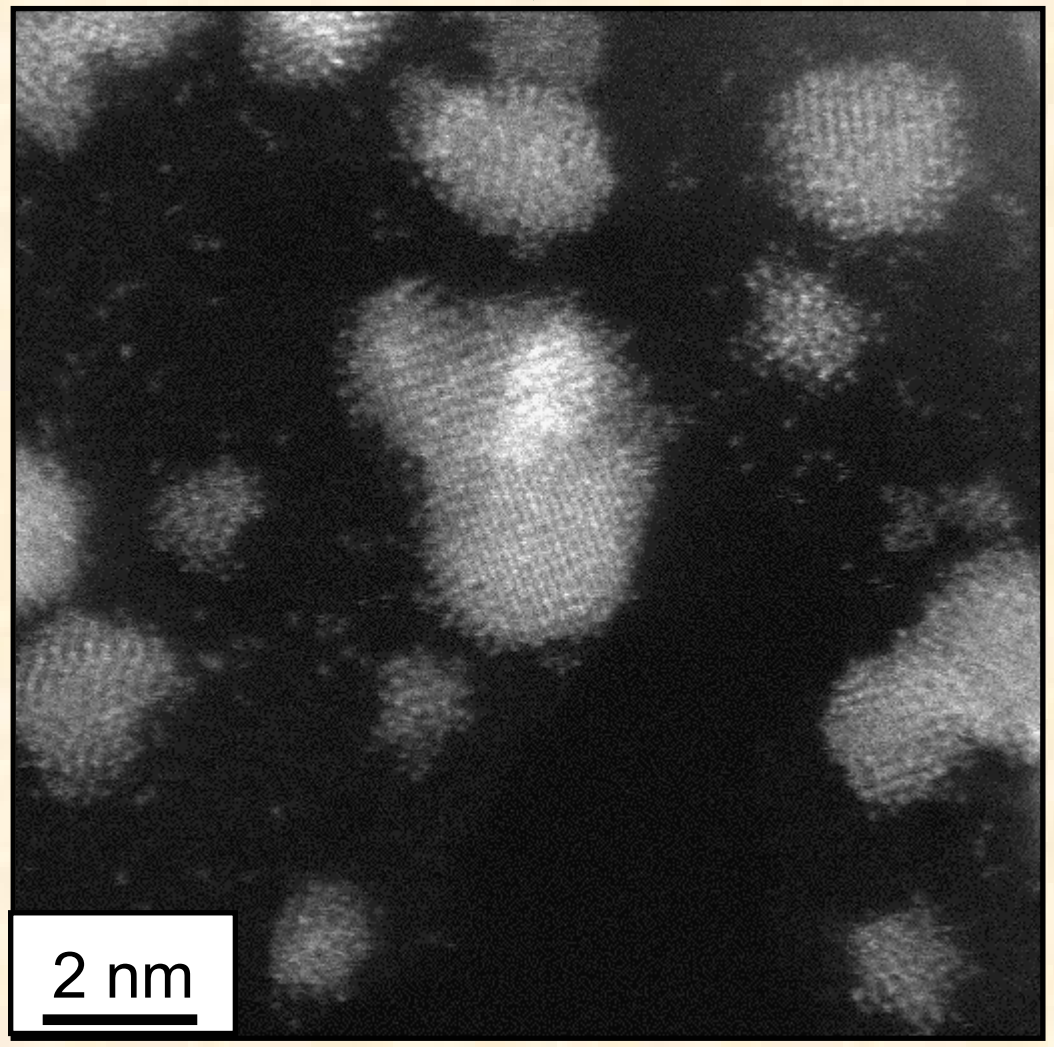

Low-temp behavior of Pt on Carbon:

- Pt particles ***do not*** dissolve and move atomically across the carbon surface to deposit on nearby particles.
- Pt particles move across carbon surface and coalesce with nearby particles forming larger single crystal particles

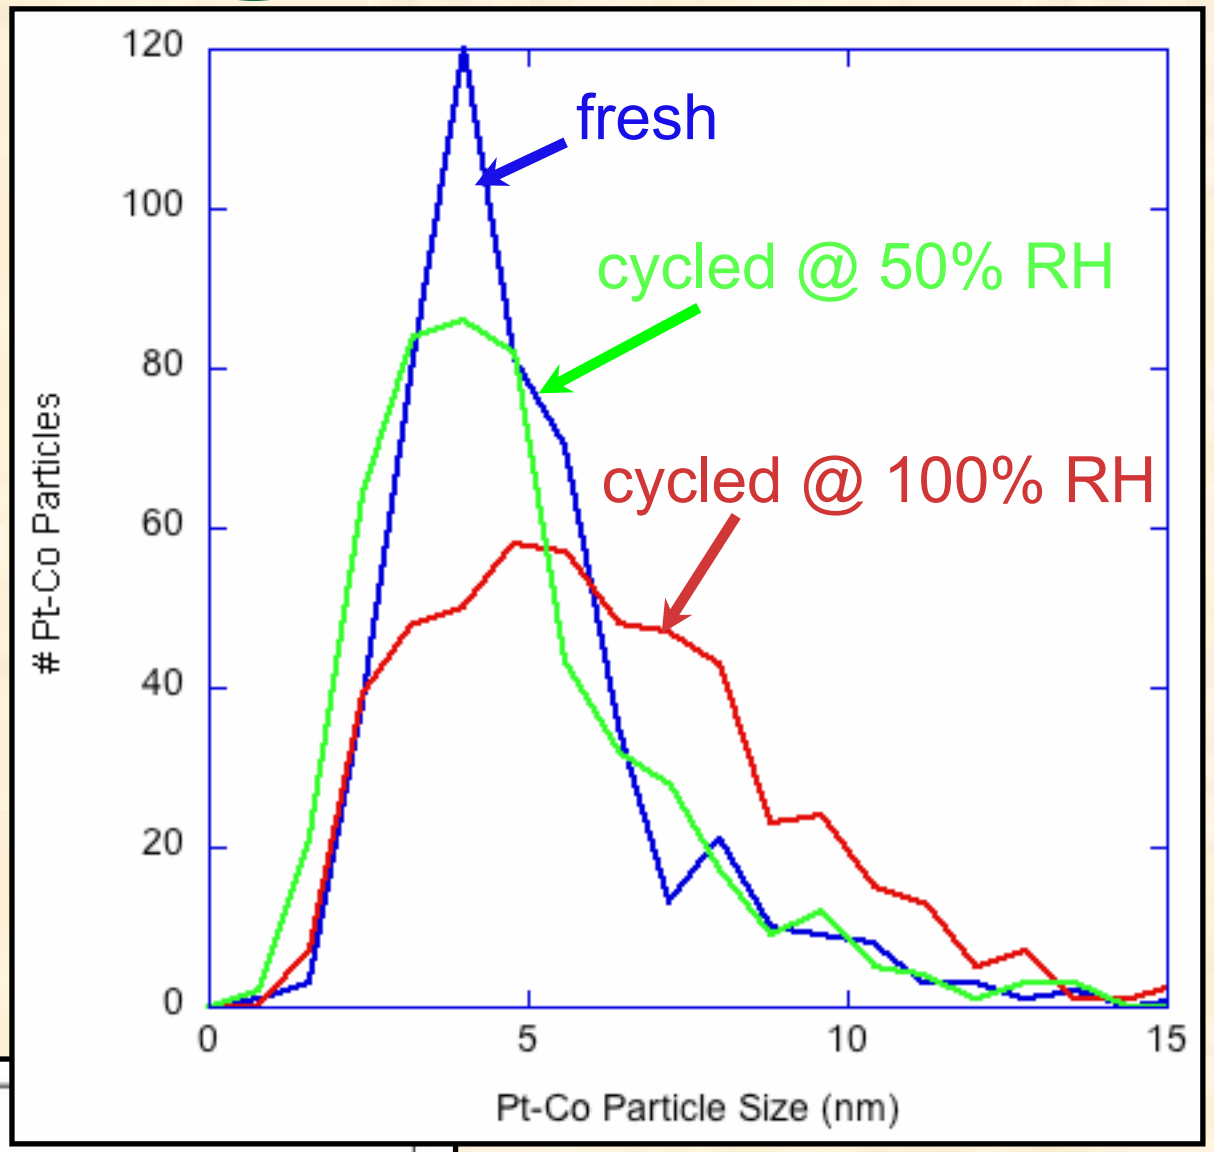

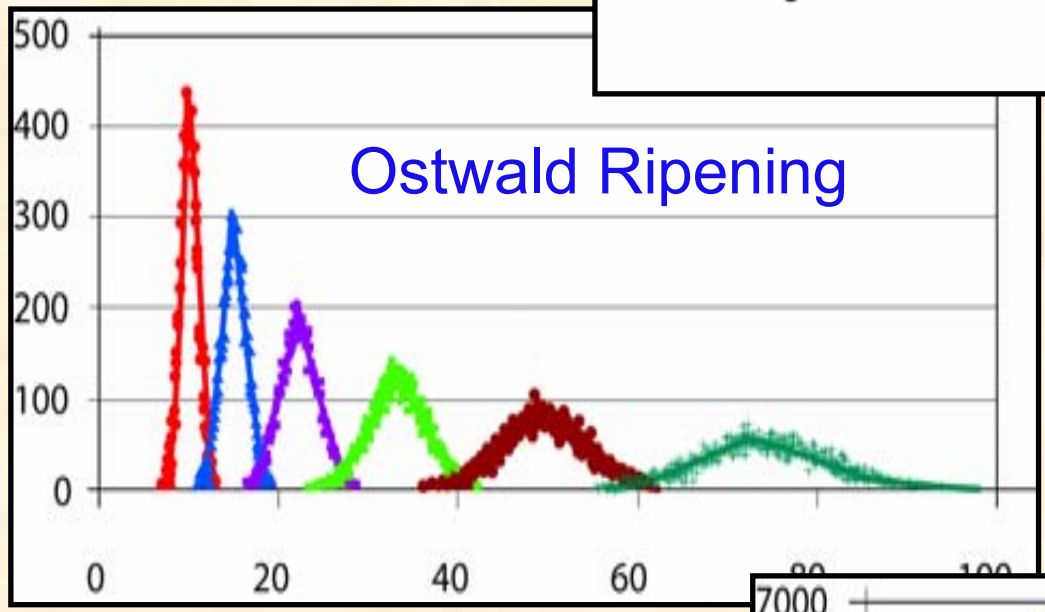

What is next:

-statistical analysis of particle size and interparticle distances on relationship to particle coalescence

-effect of humidity, potential, etc. on coarsening mechanism and rate of coarsening

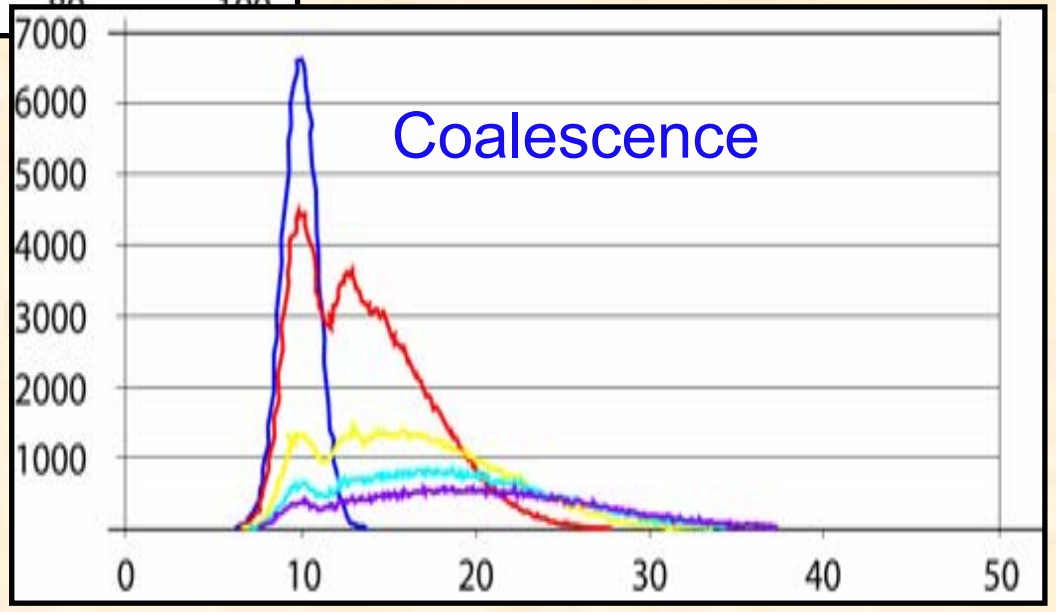

In Situ Microscopy for PEM Fuel Cell Research at the nm-Scale - Several Paths Forward

- Pt-Co exhibits lower loss of surface area compared with Pt during potential cycling
- Higher %RH enhances particle growth

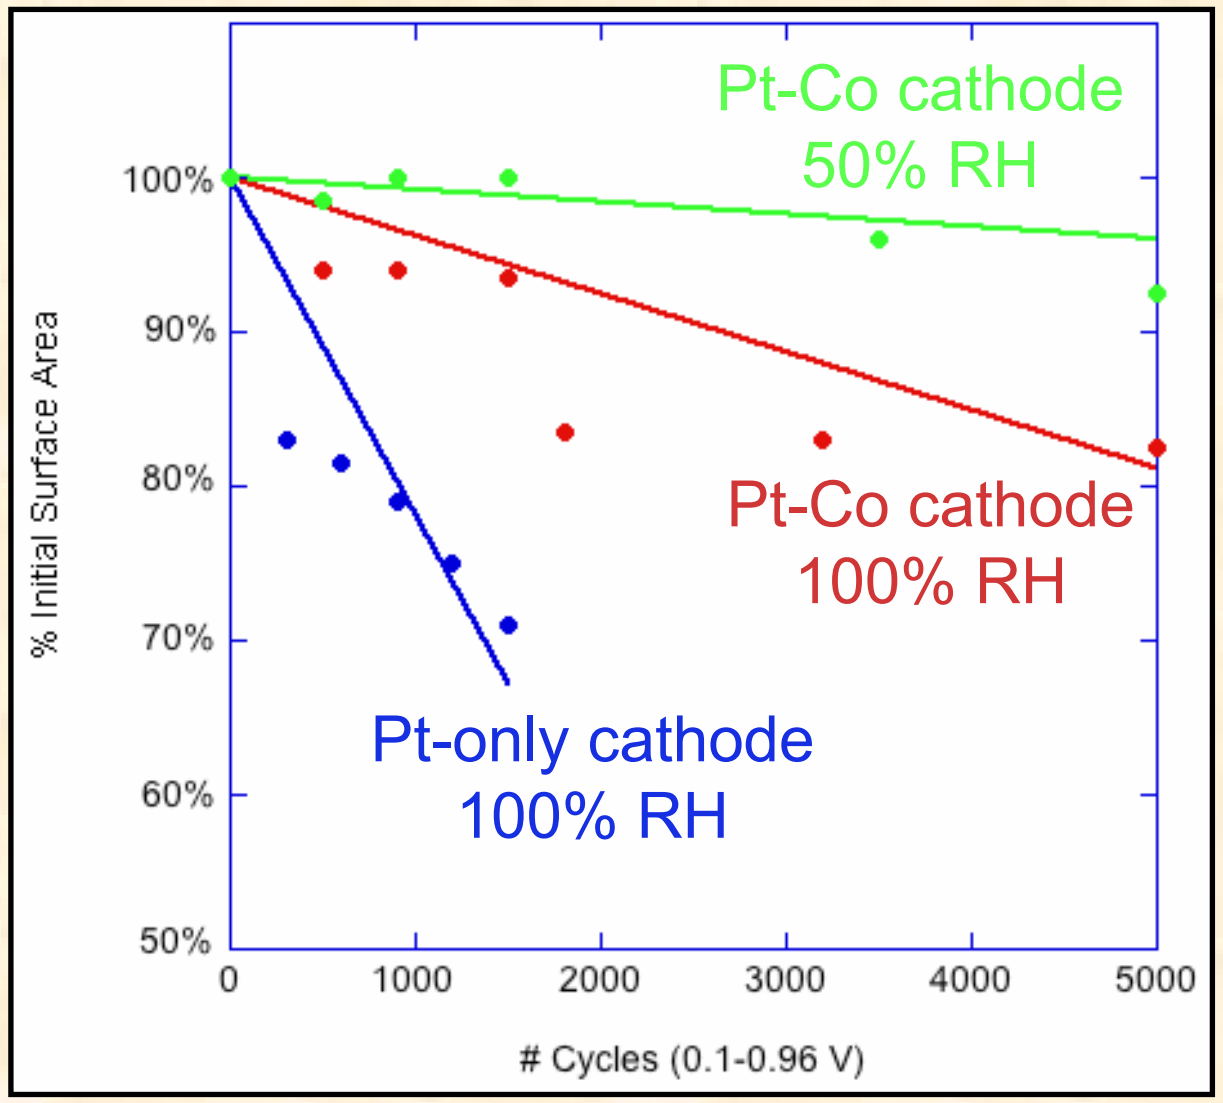

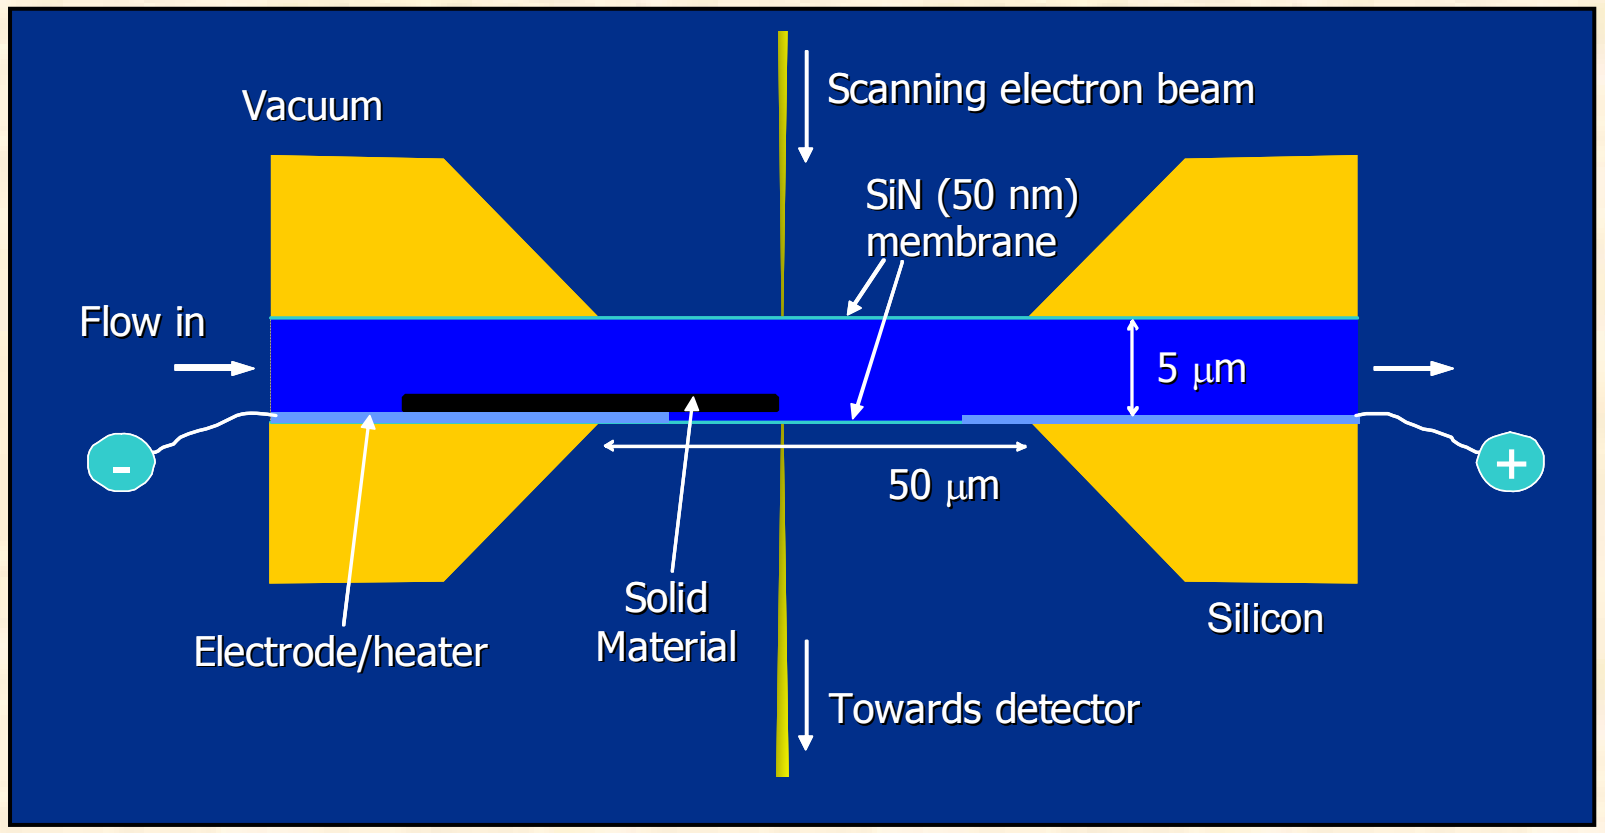

Develop specialized holders for fuel cell materials based on an initial design for imaging particles in liquid H_2O:

- variable liquid and gas flow rates
- variable temperature (cryo-1000°C)
- potential cycling

Potential Research Areas:

- Near live-time imaging of:
  - surface reactions
  - catalyst coarsening/migration
  - carbon corrosion
- Hydrophilicity/hydrophobicity (GDL, MPL components)
- STEM 3D imaging; i.e., through-thickness reconstruction

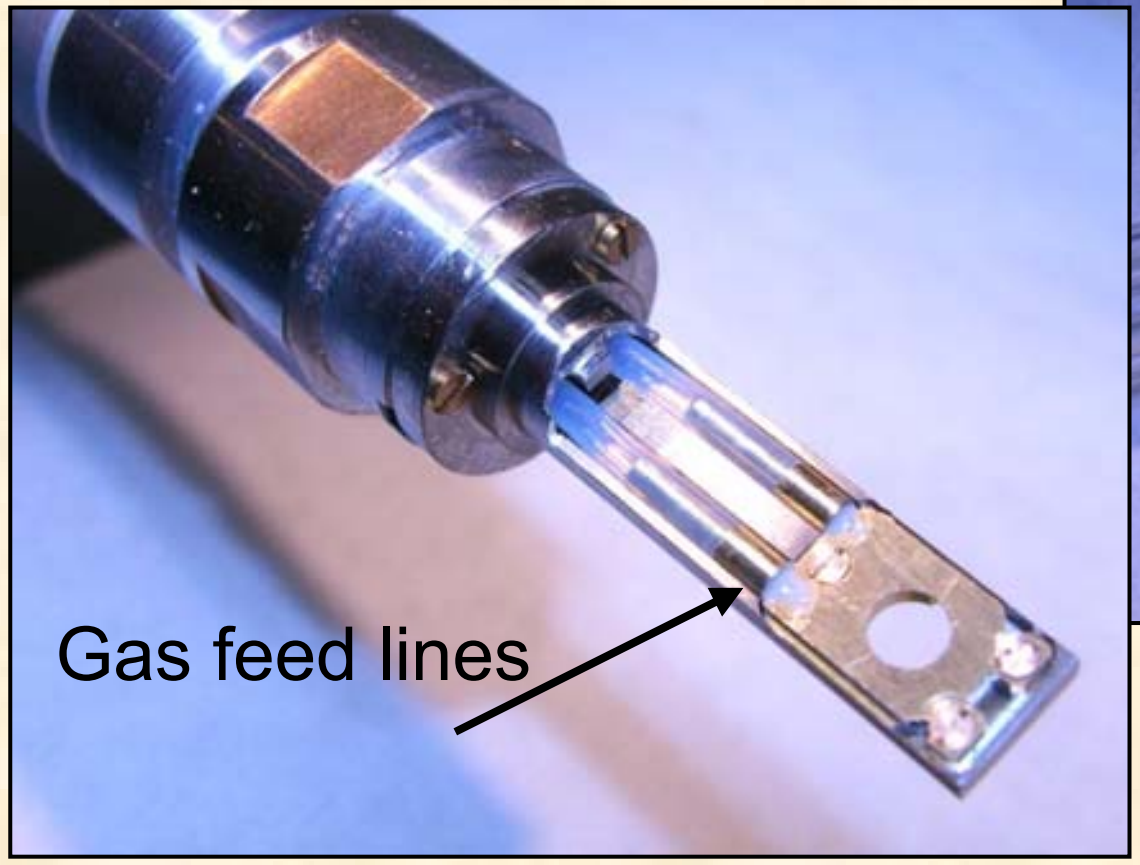

Simultaneous Acquisition of HAADF and BF STEM Images Provides Structural Information Regarding Catalyst AND Support

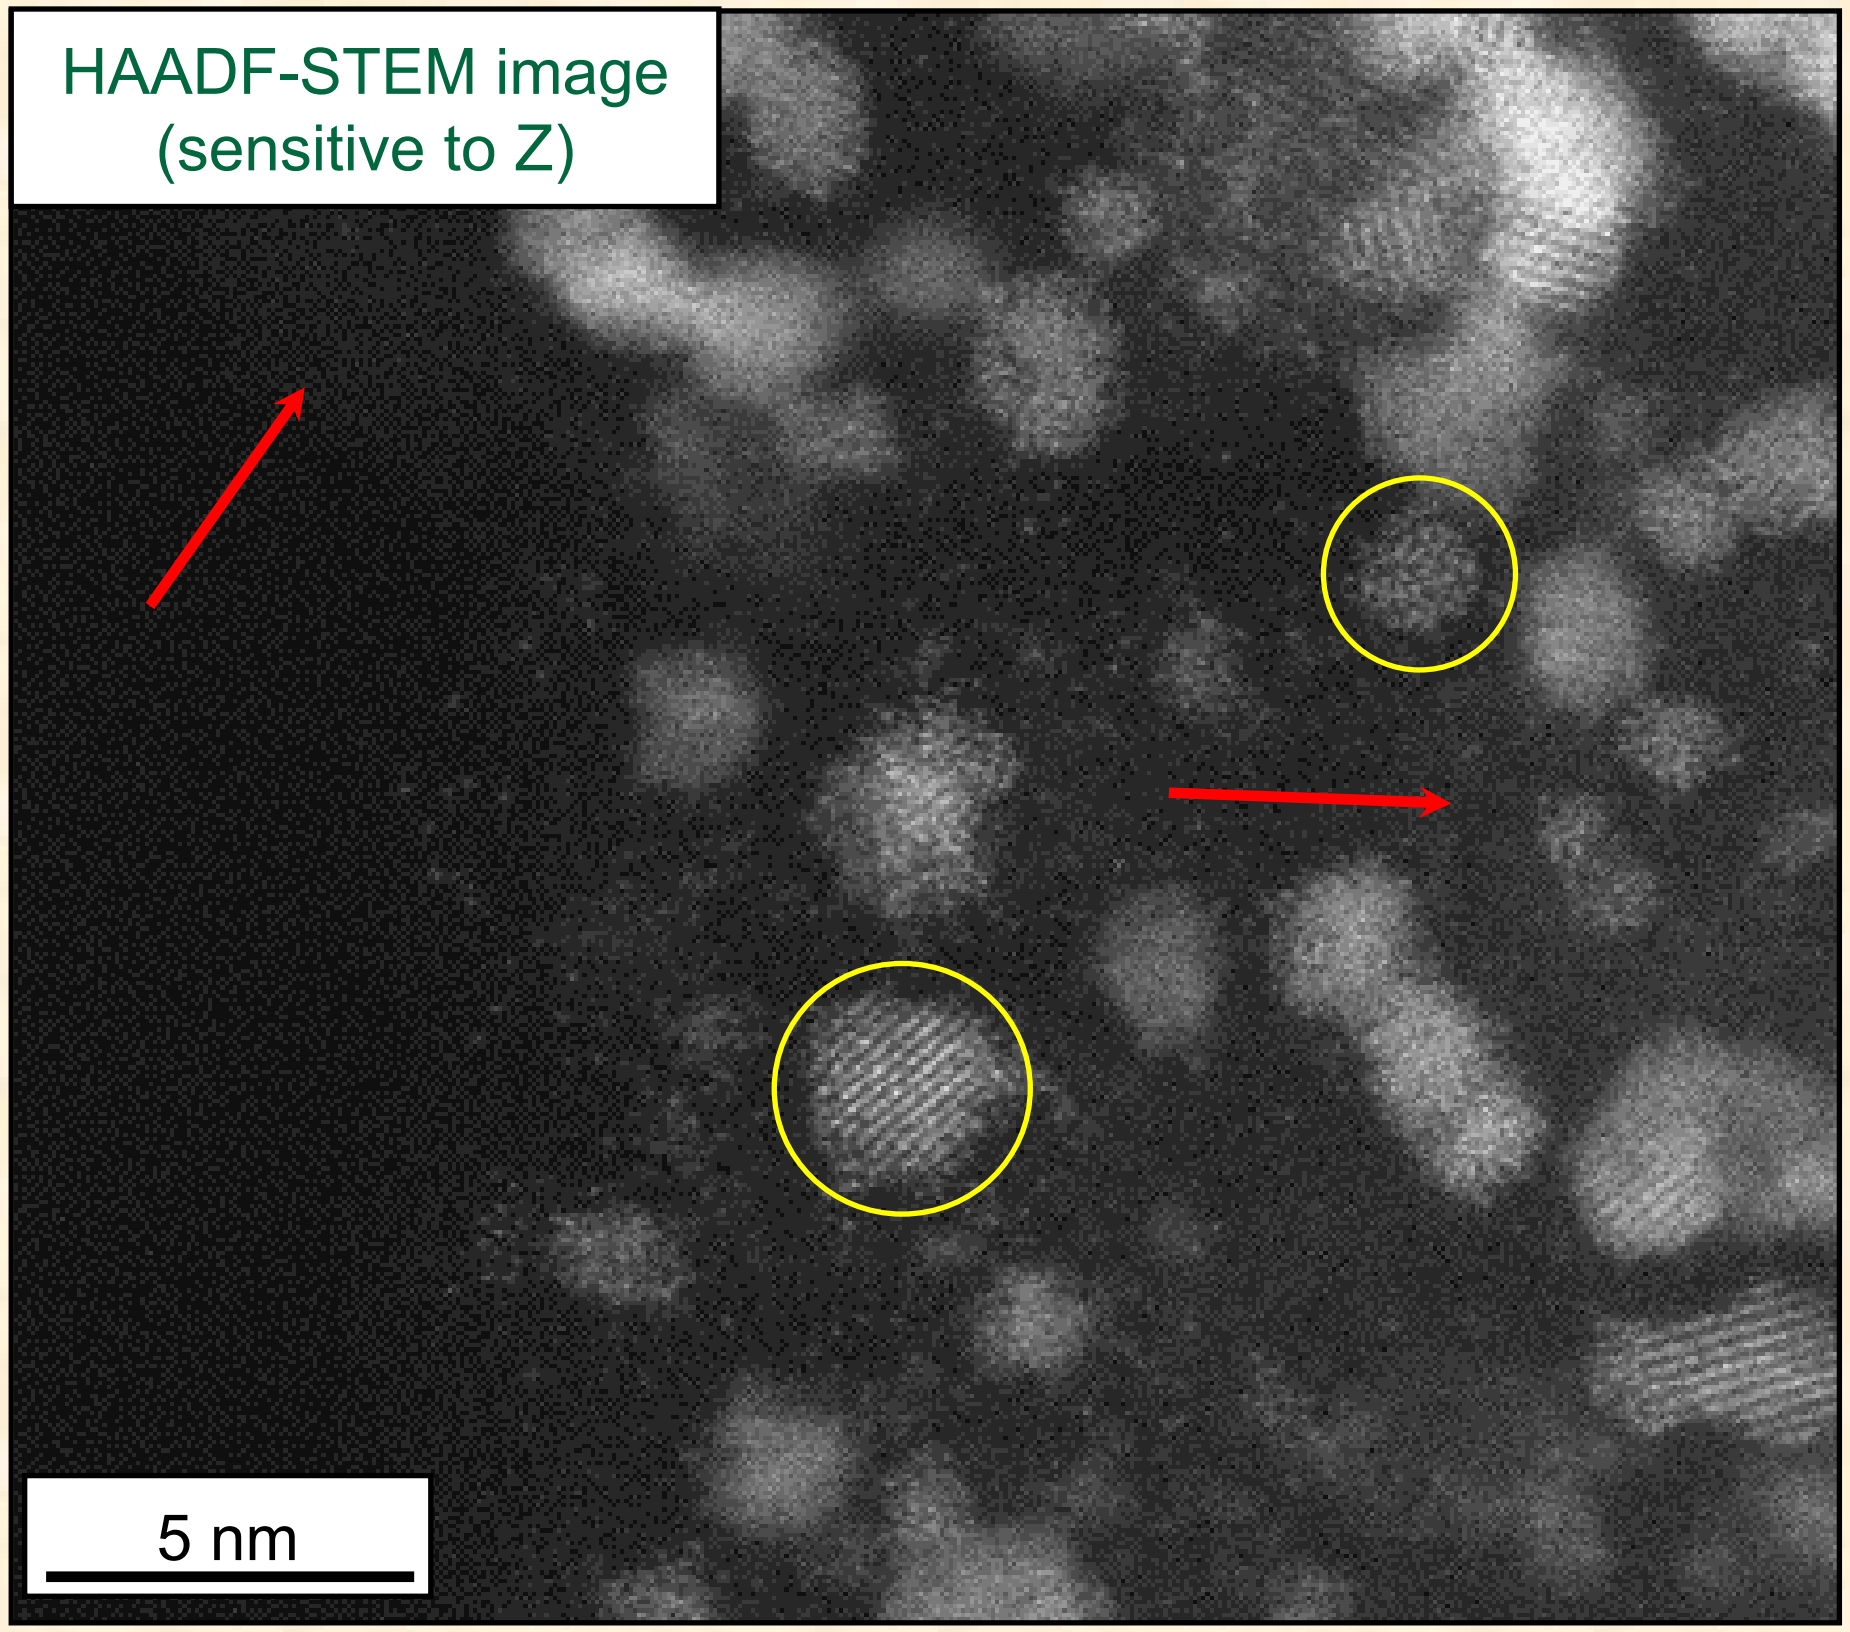

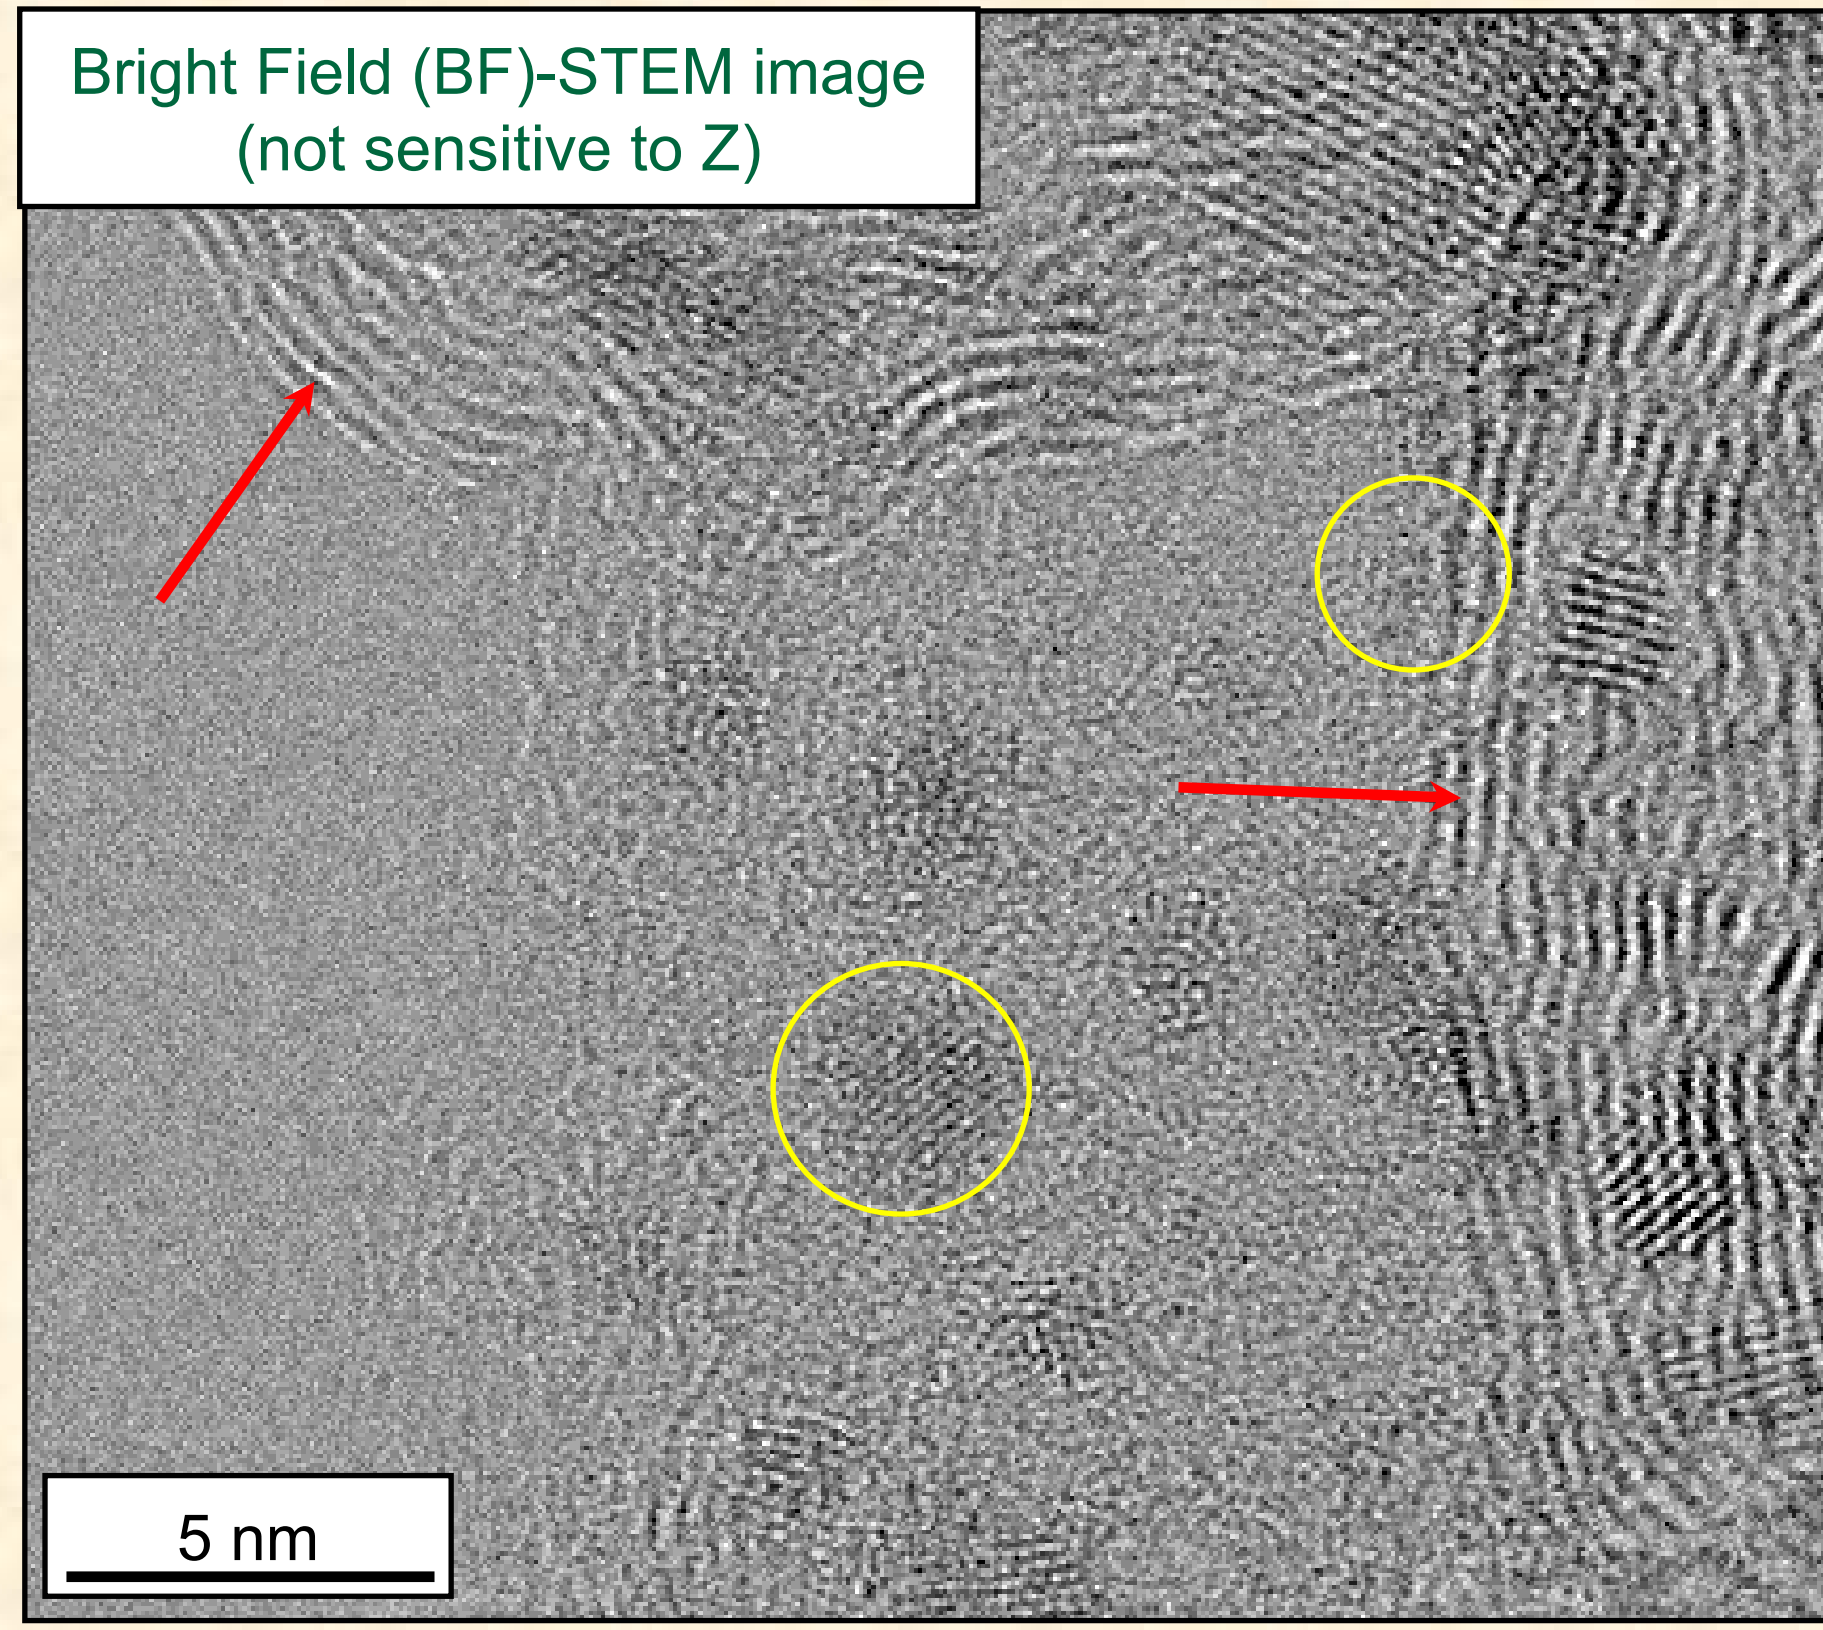

HAADF STEM used to image the structure of high-Z catalyst nanoparticles on carbon

BF STEM used to image the structure of the carbon support (note 0.34nm graphite lattice)

ORNL Research is Focused on Depth-Sectioning Through Nanoparticles and 3D Reconstruction

3D STEM: depth-imaging “through” the thickness of a particle

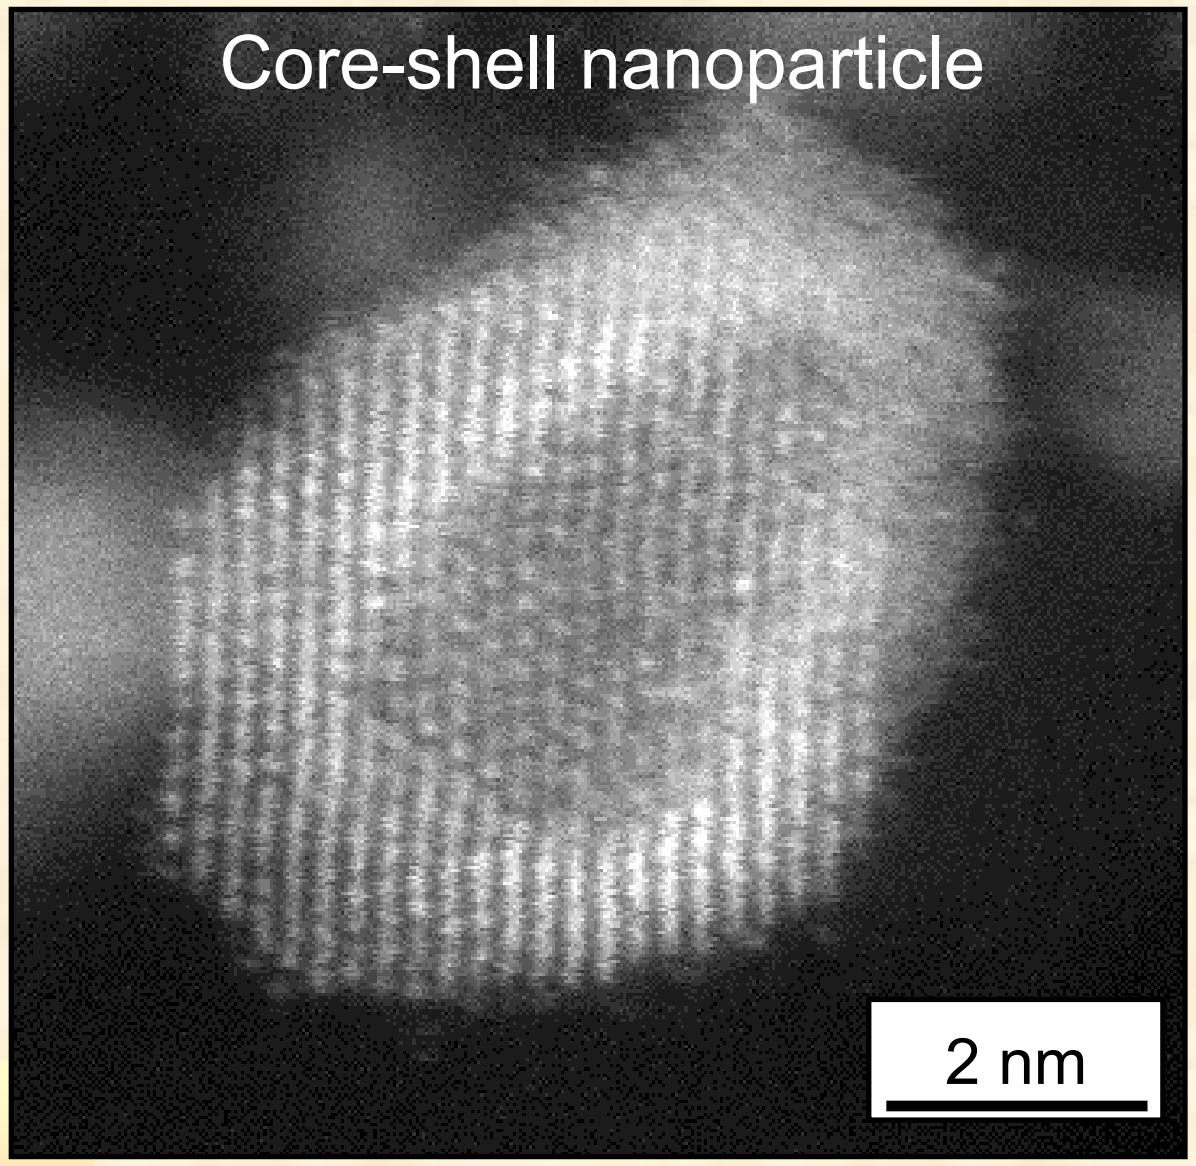

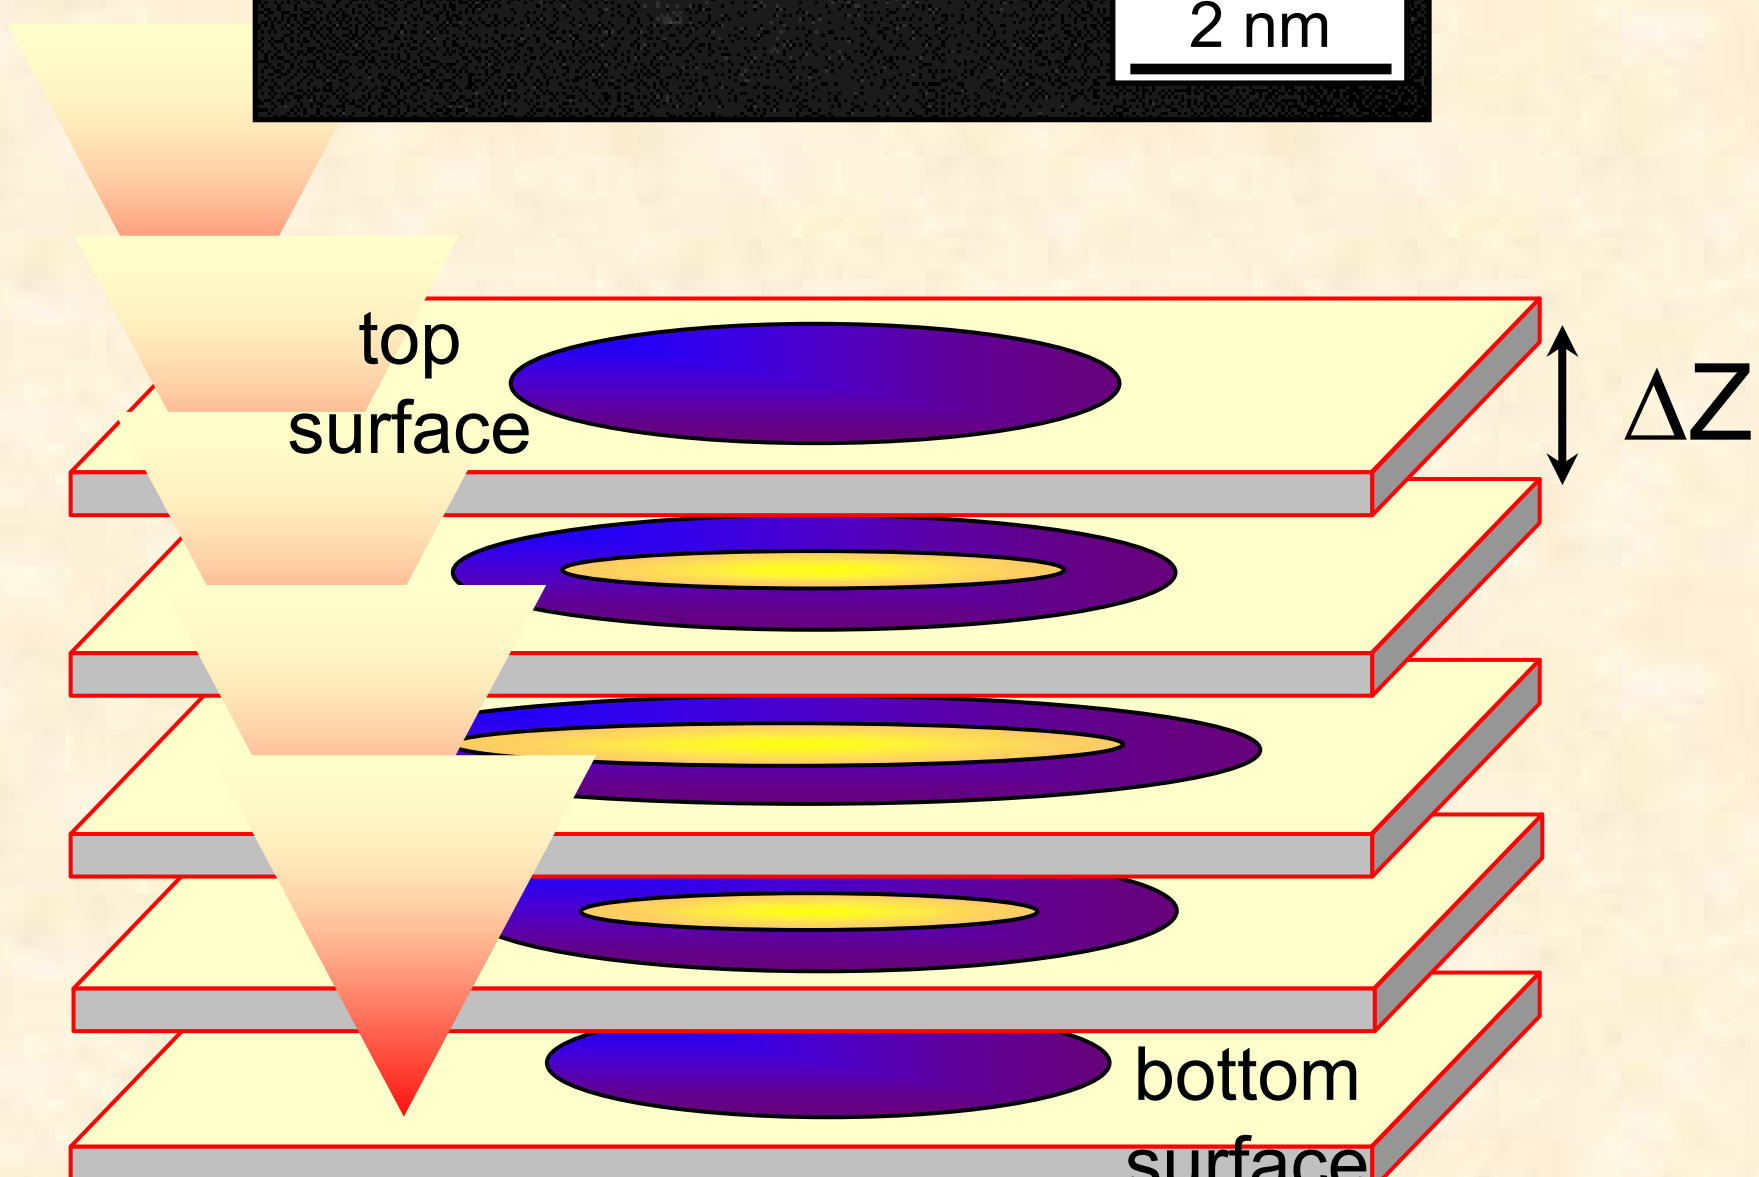

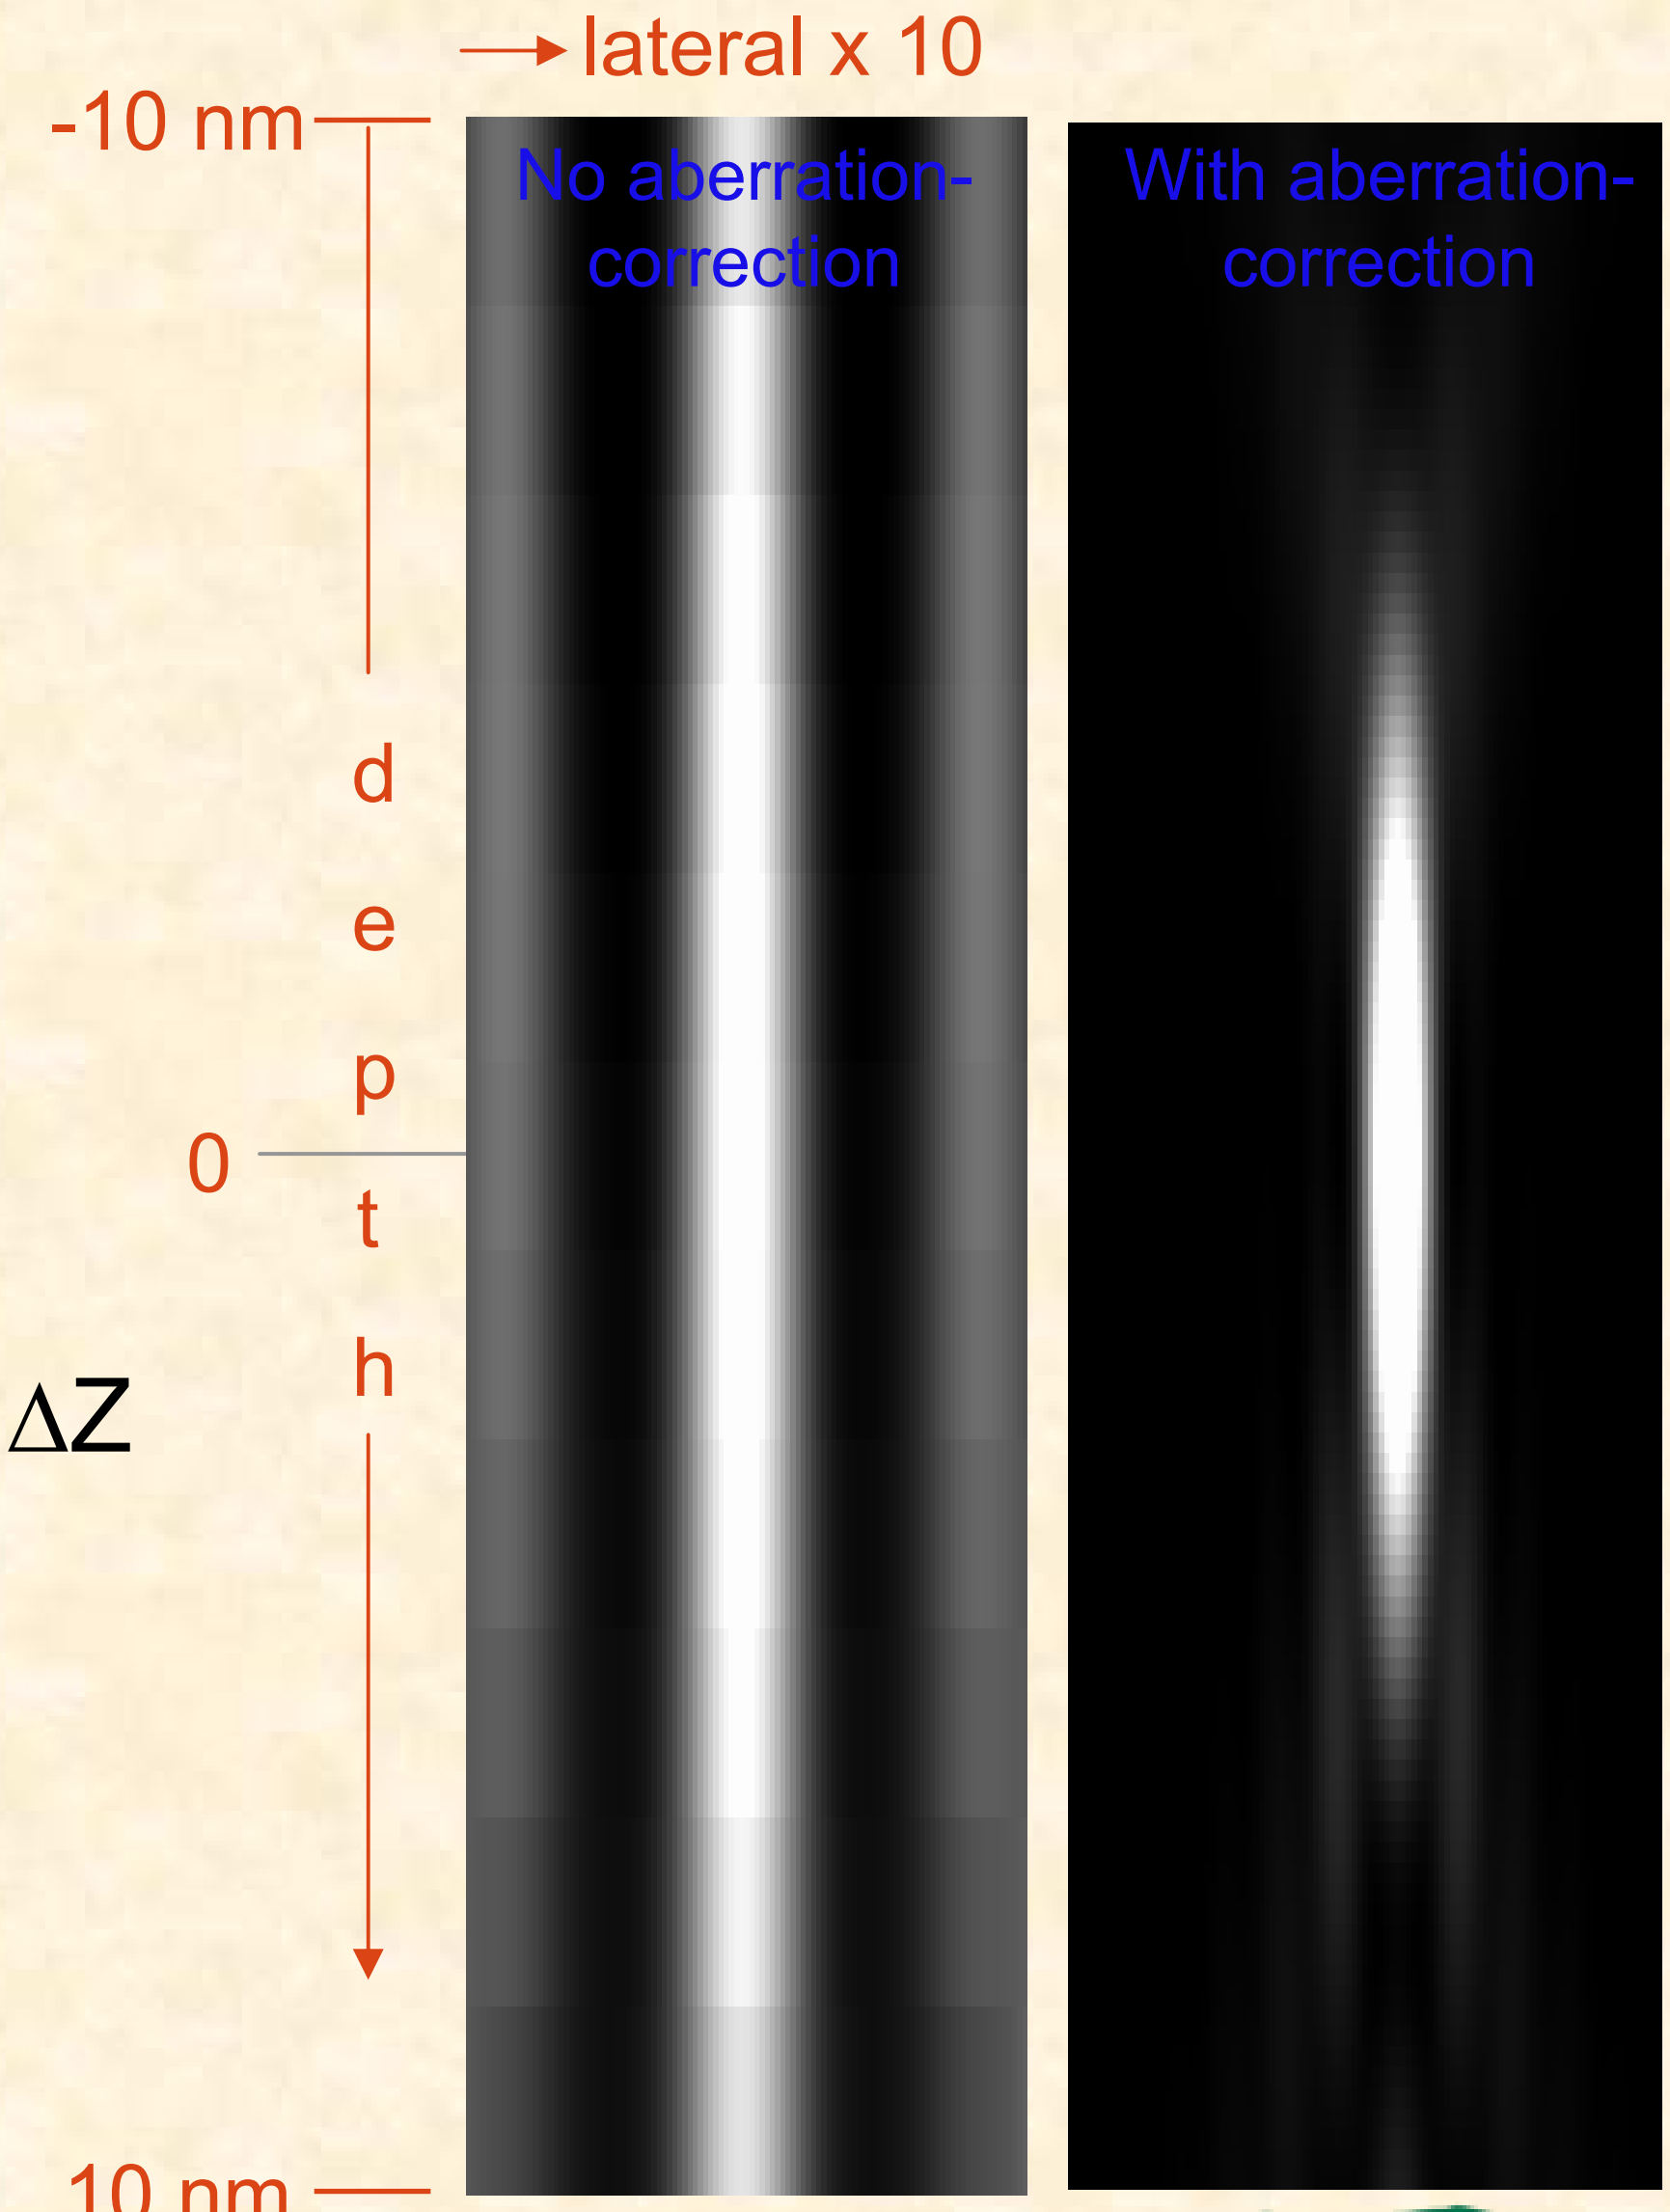

Slide courtesy of S.J. Pennycook, ORNL

Microstructure of BNL's Pt(ML)/Pd Catalyst

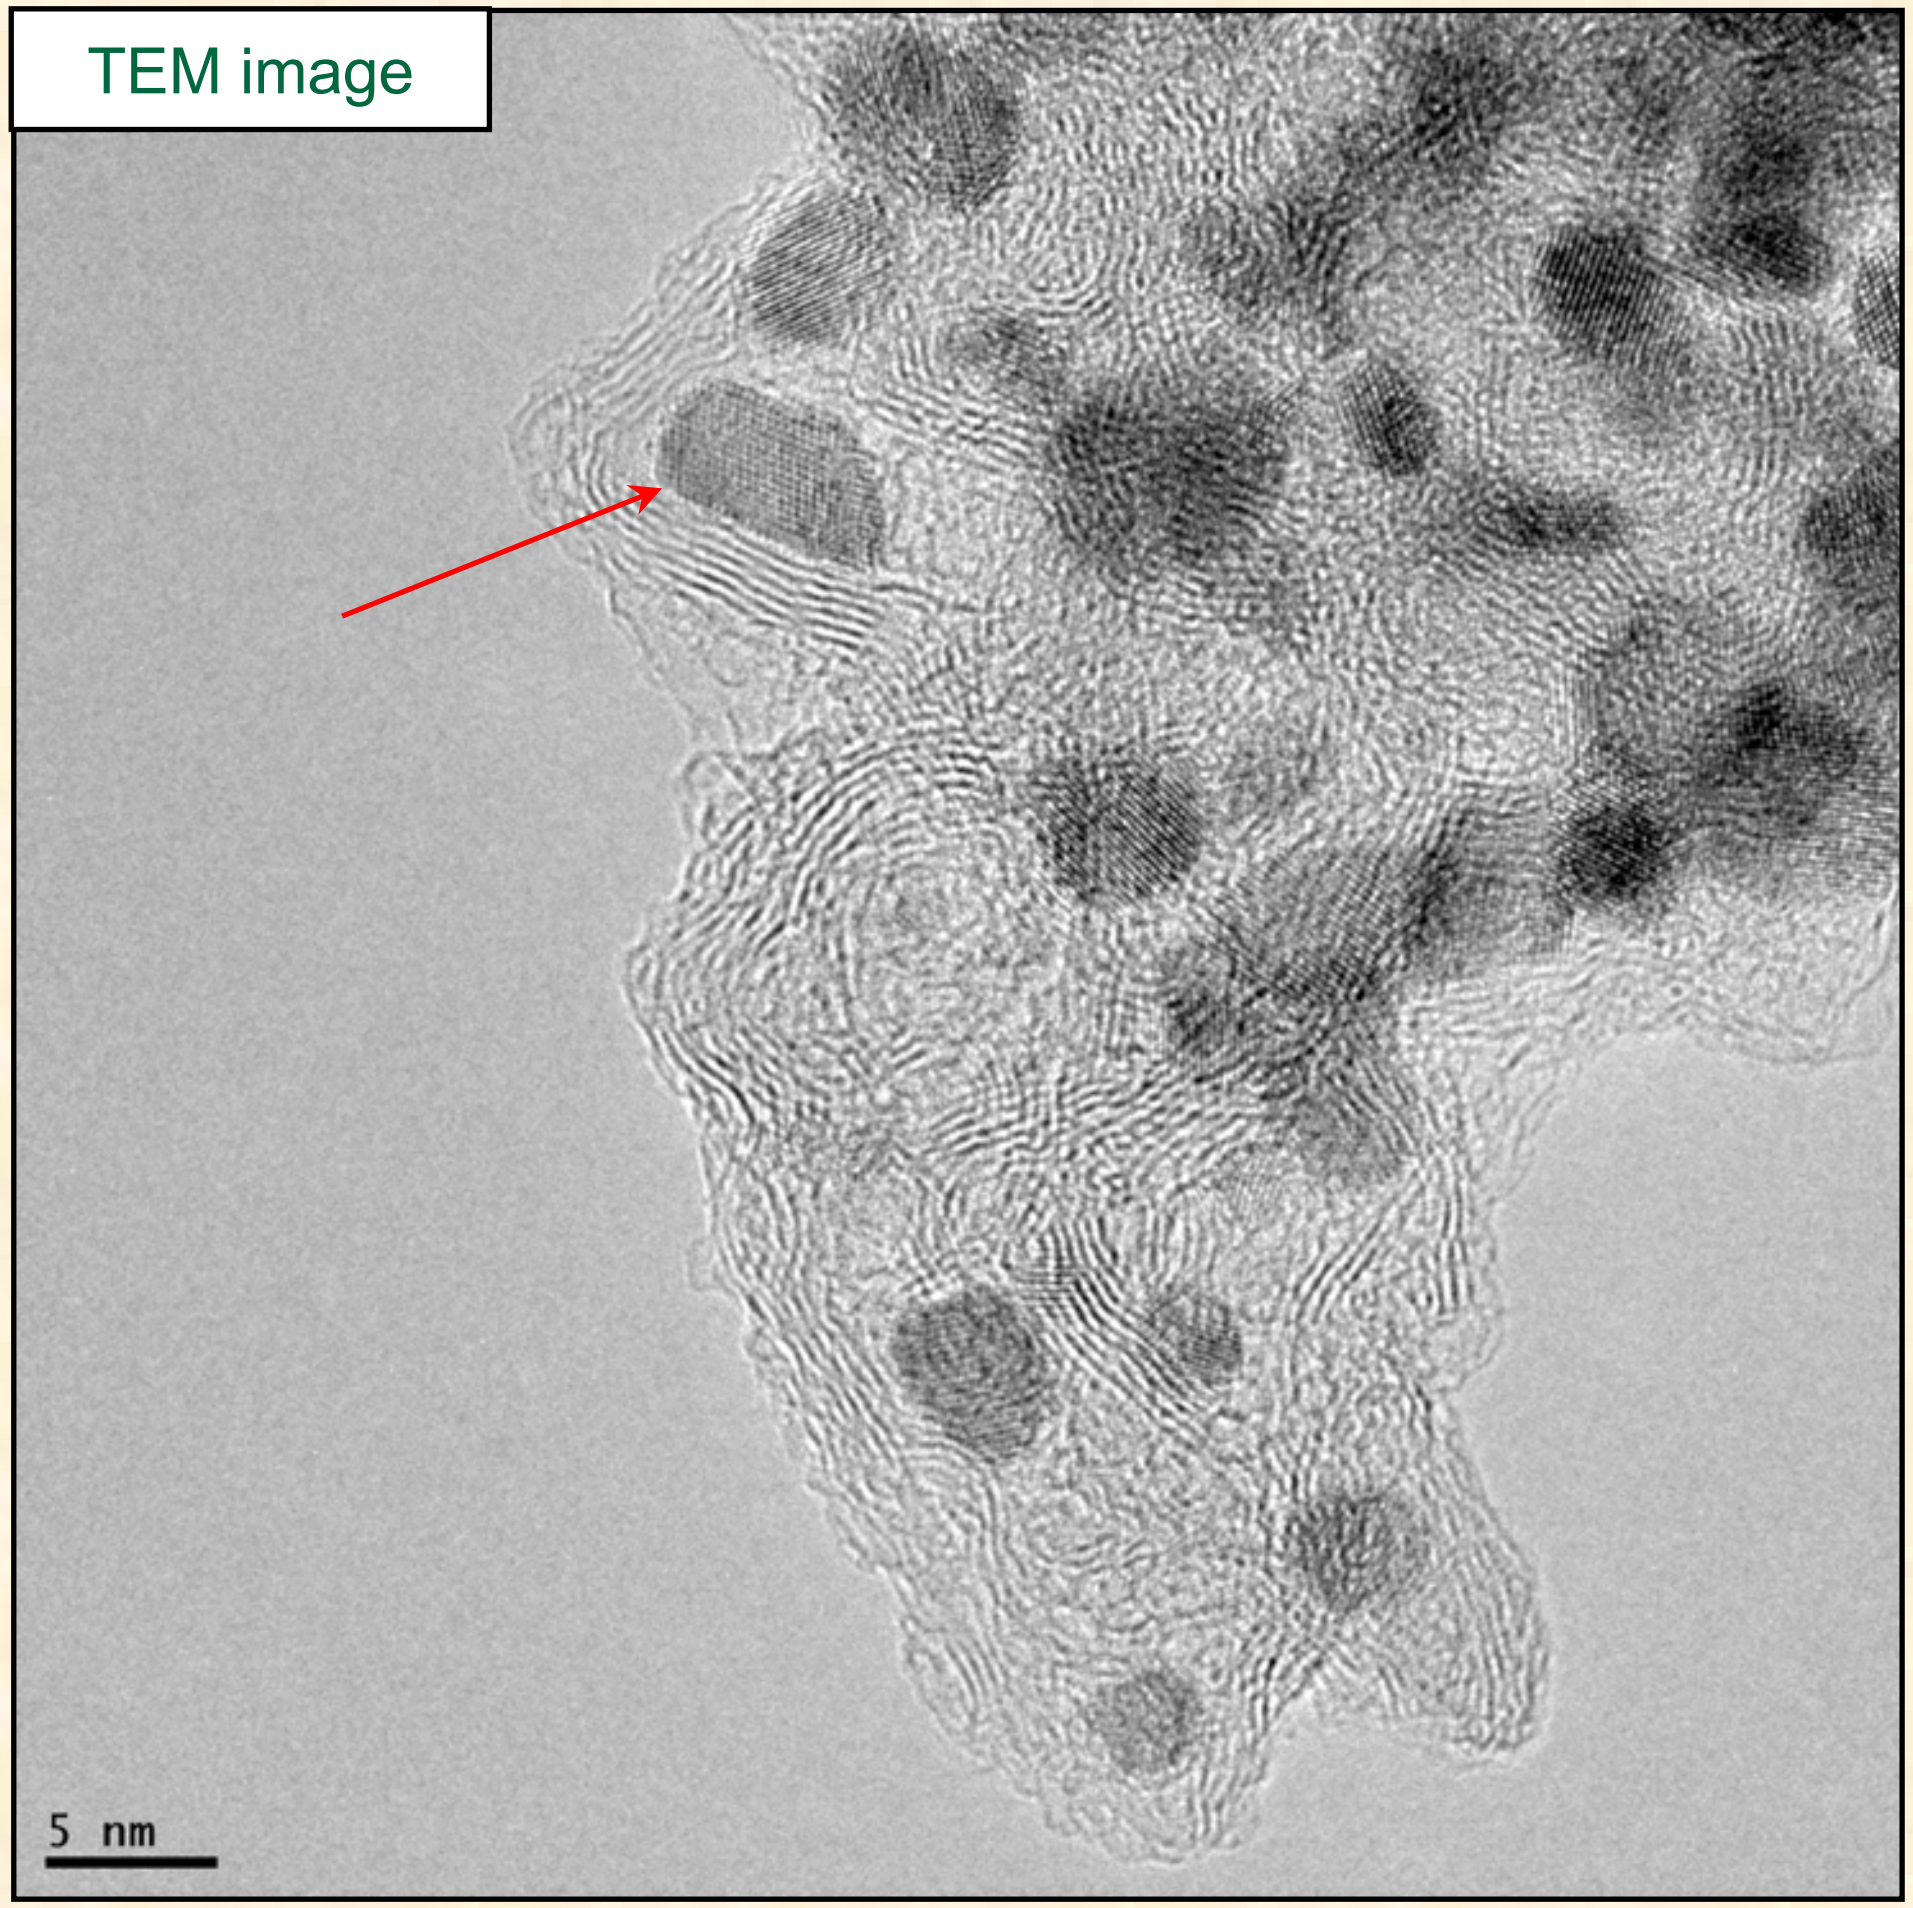

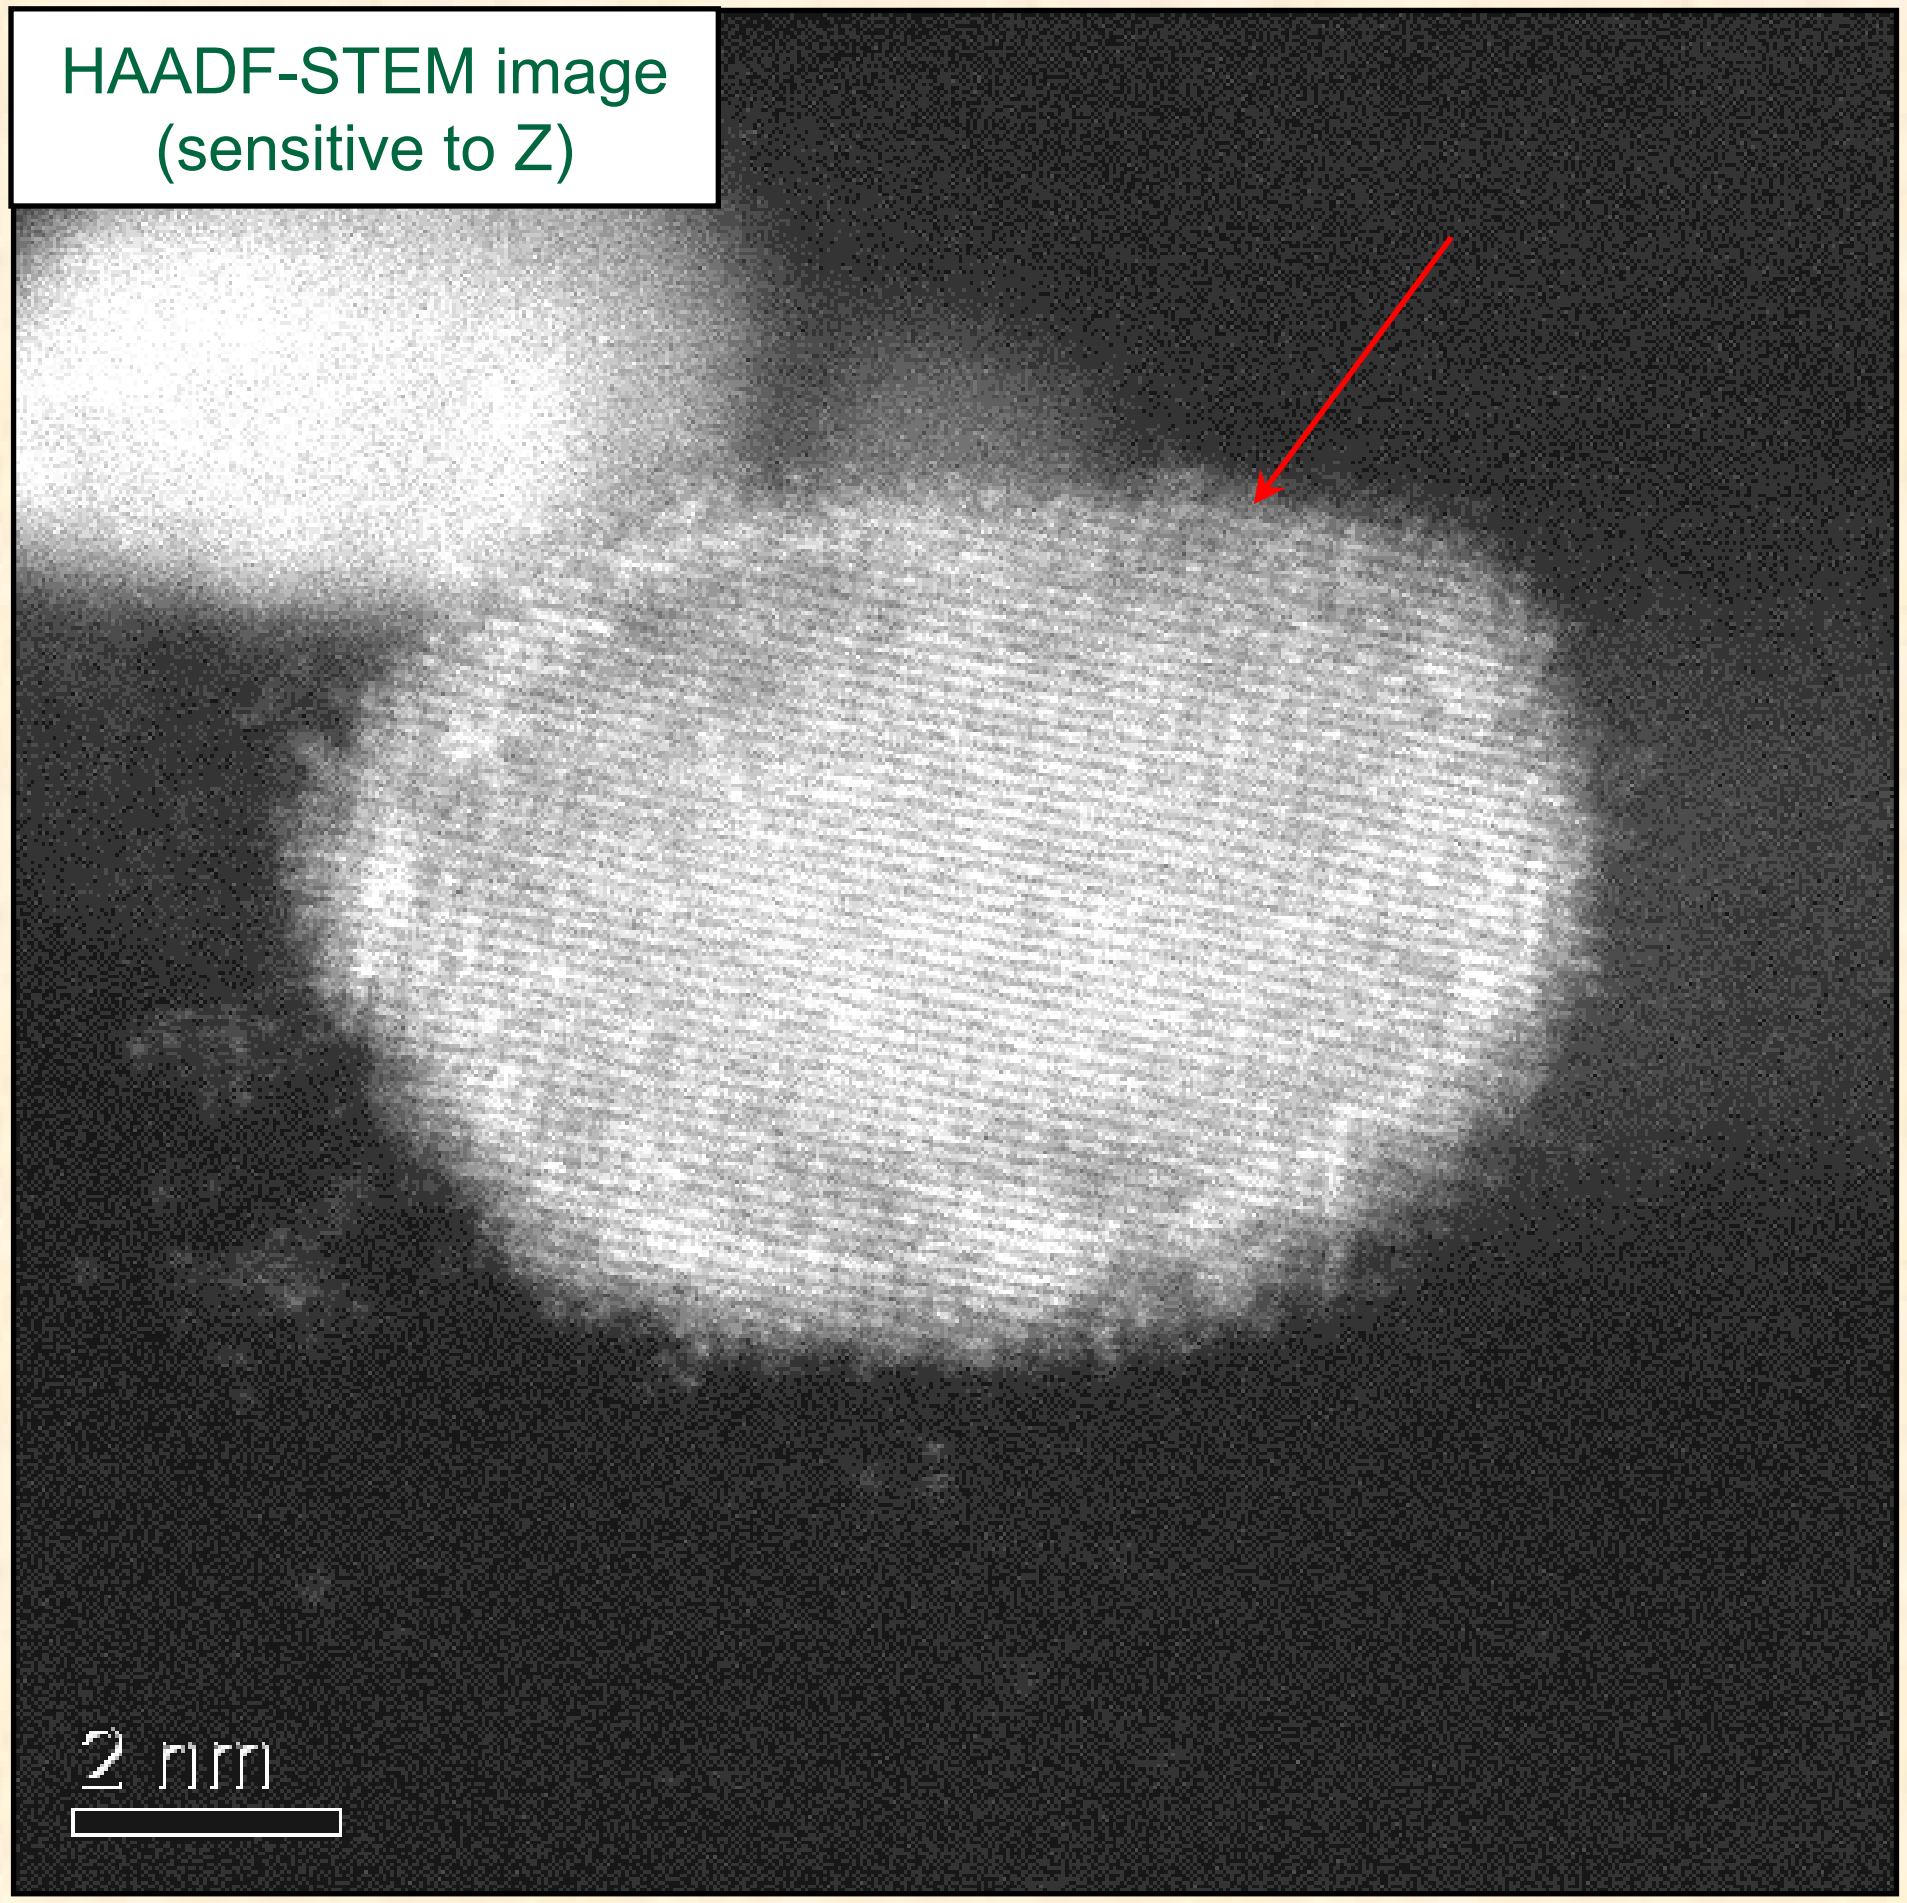

Pd nanoparticles typically exhibit an elongated morphology and have a significant area of contact with the carbon support

BNL's Pt(ML)/Pd Catalyst Particles Exhibit a Well-Defined Core-Shell Structure.

Through-Focal Imaging (3D) Can Provide Additional Information Regarding Nanoparticle Structure

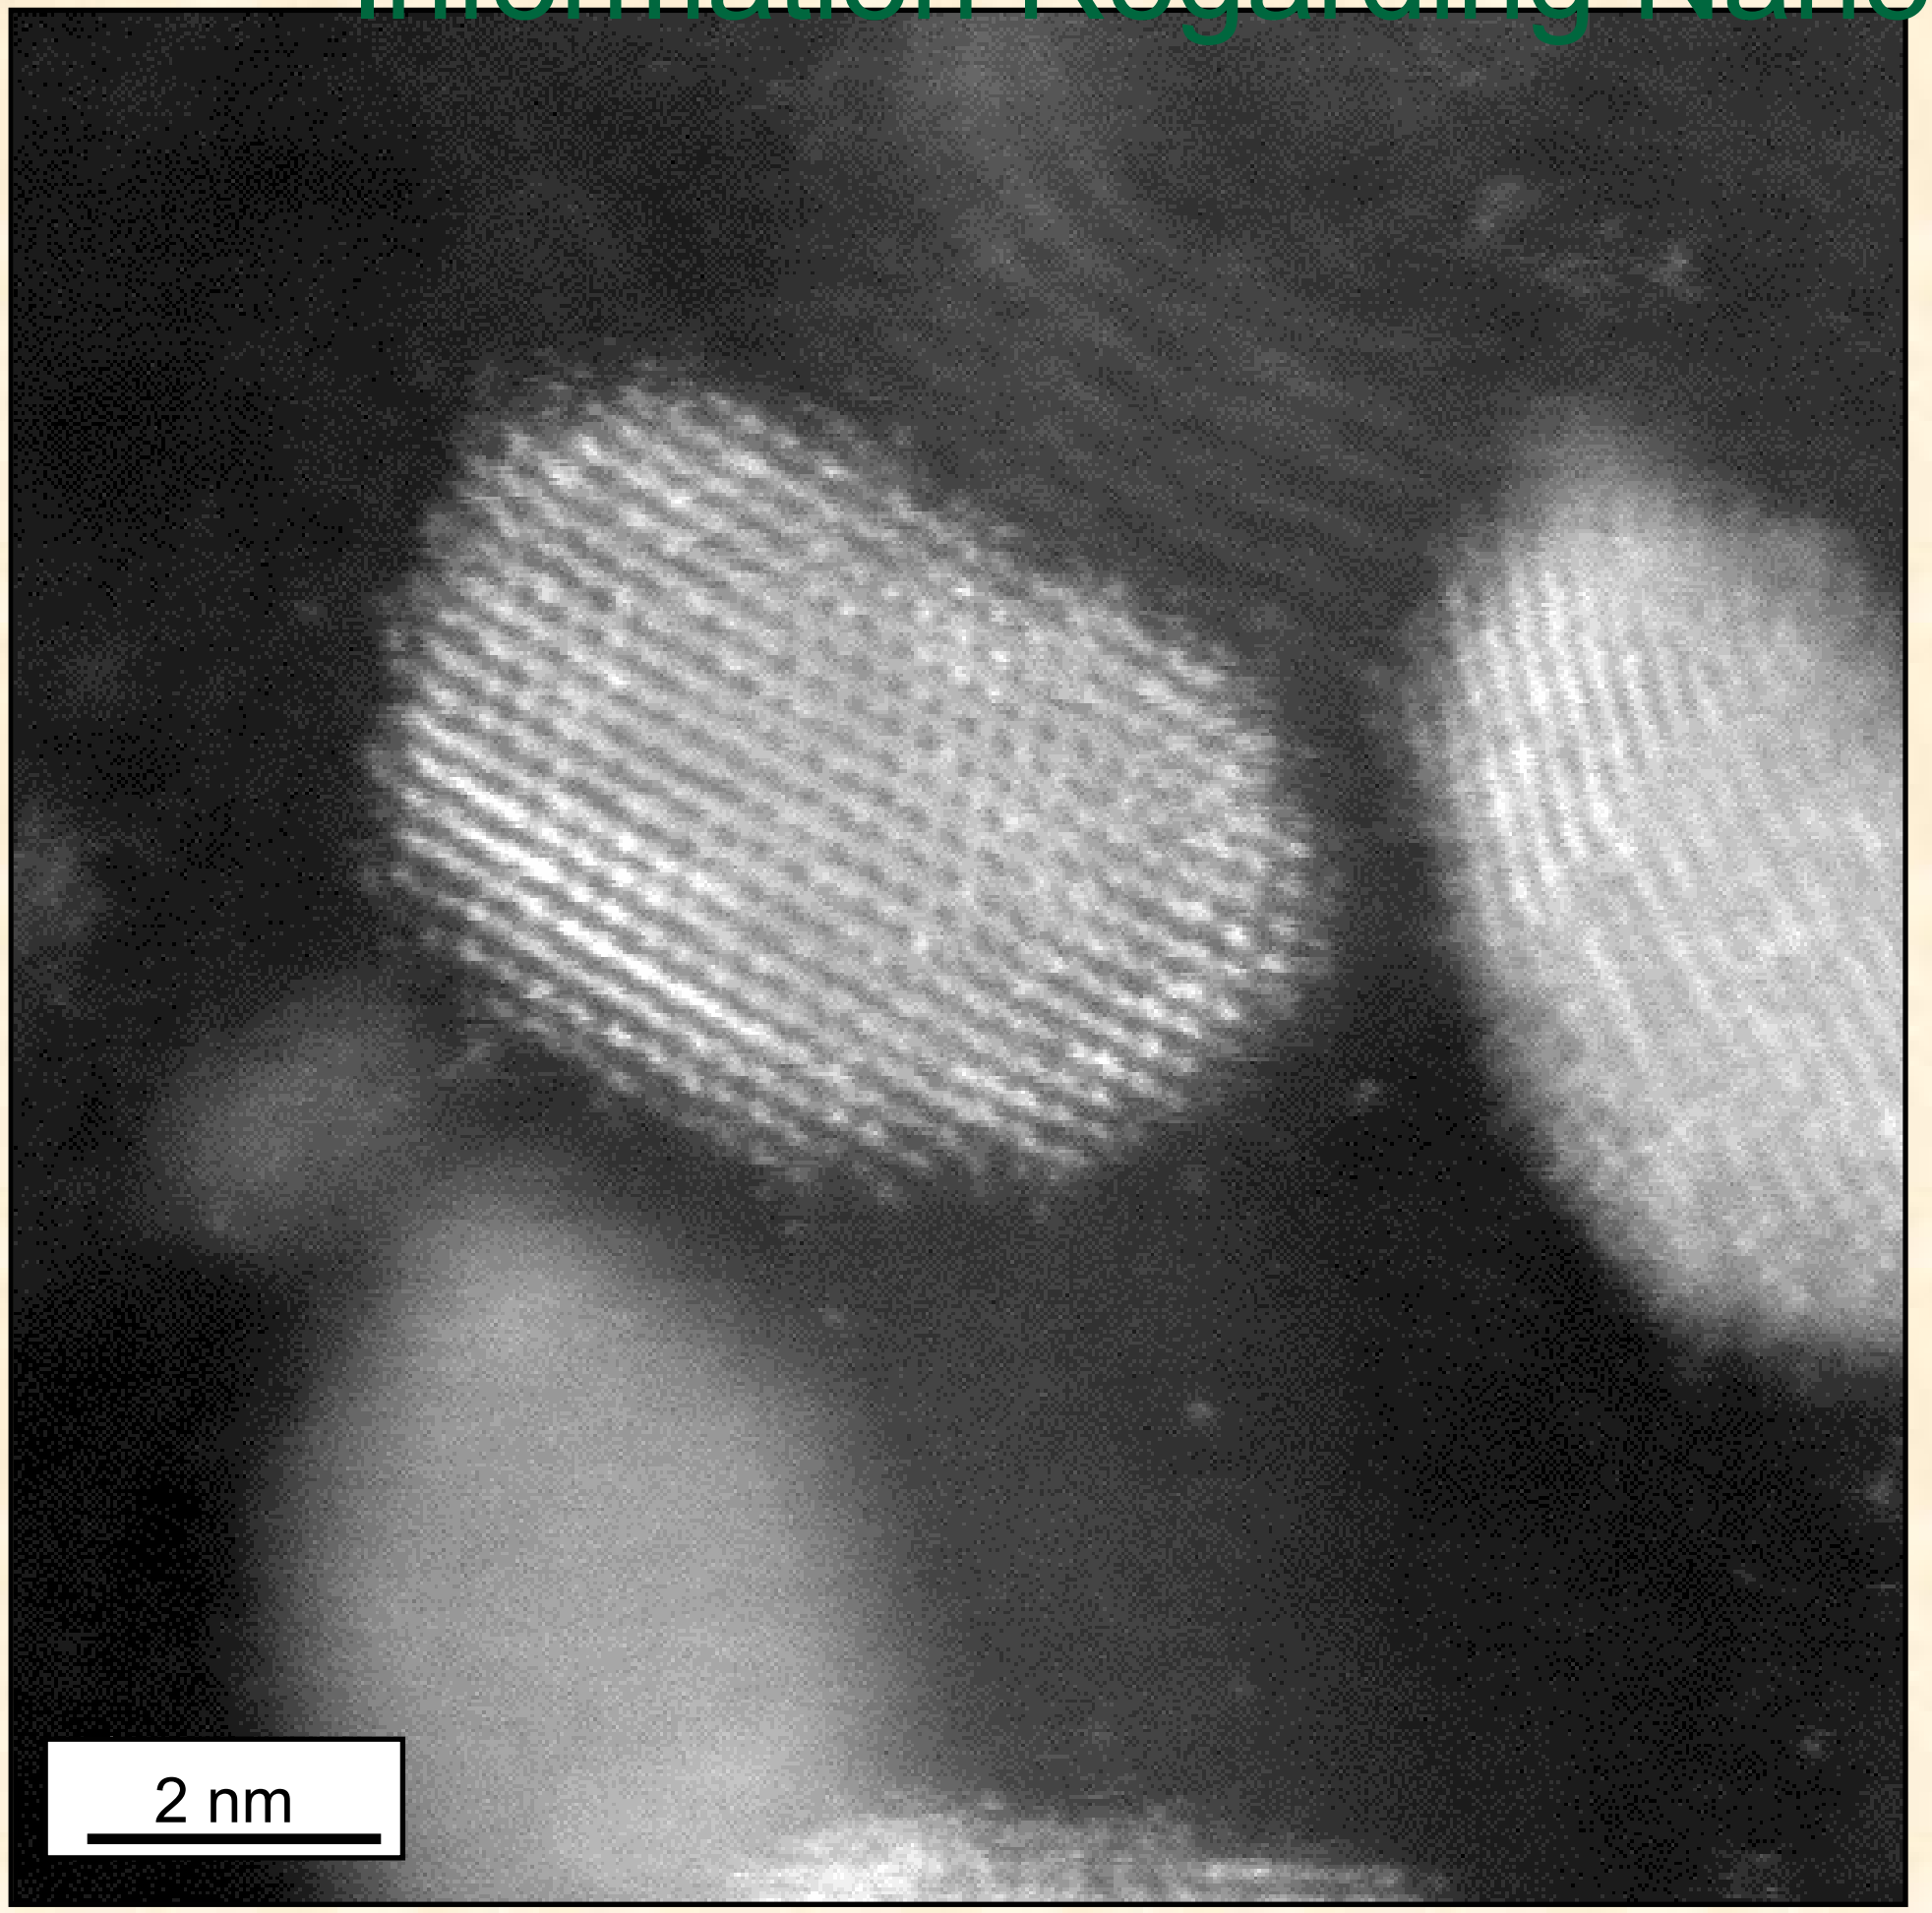

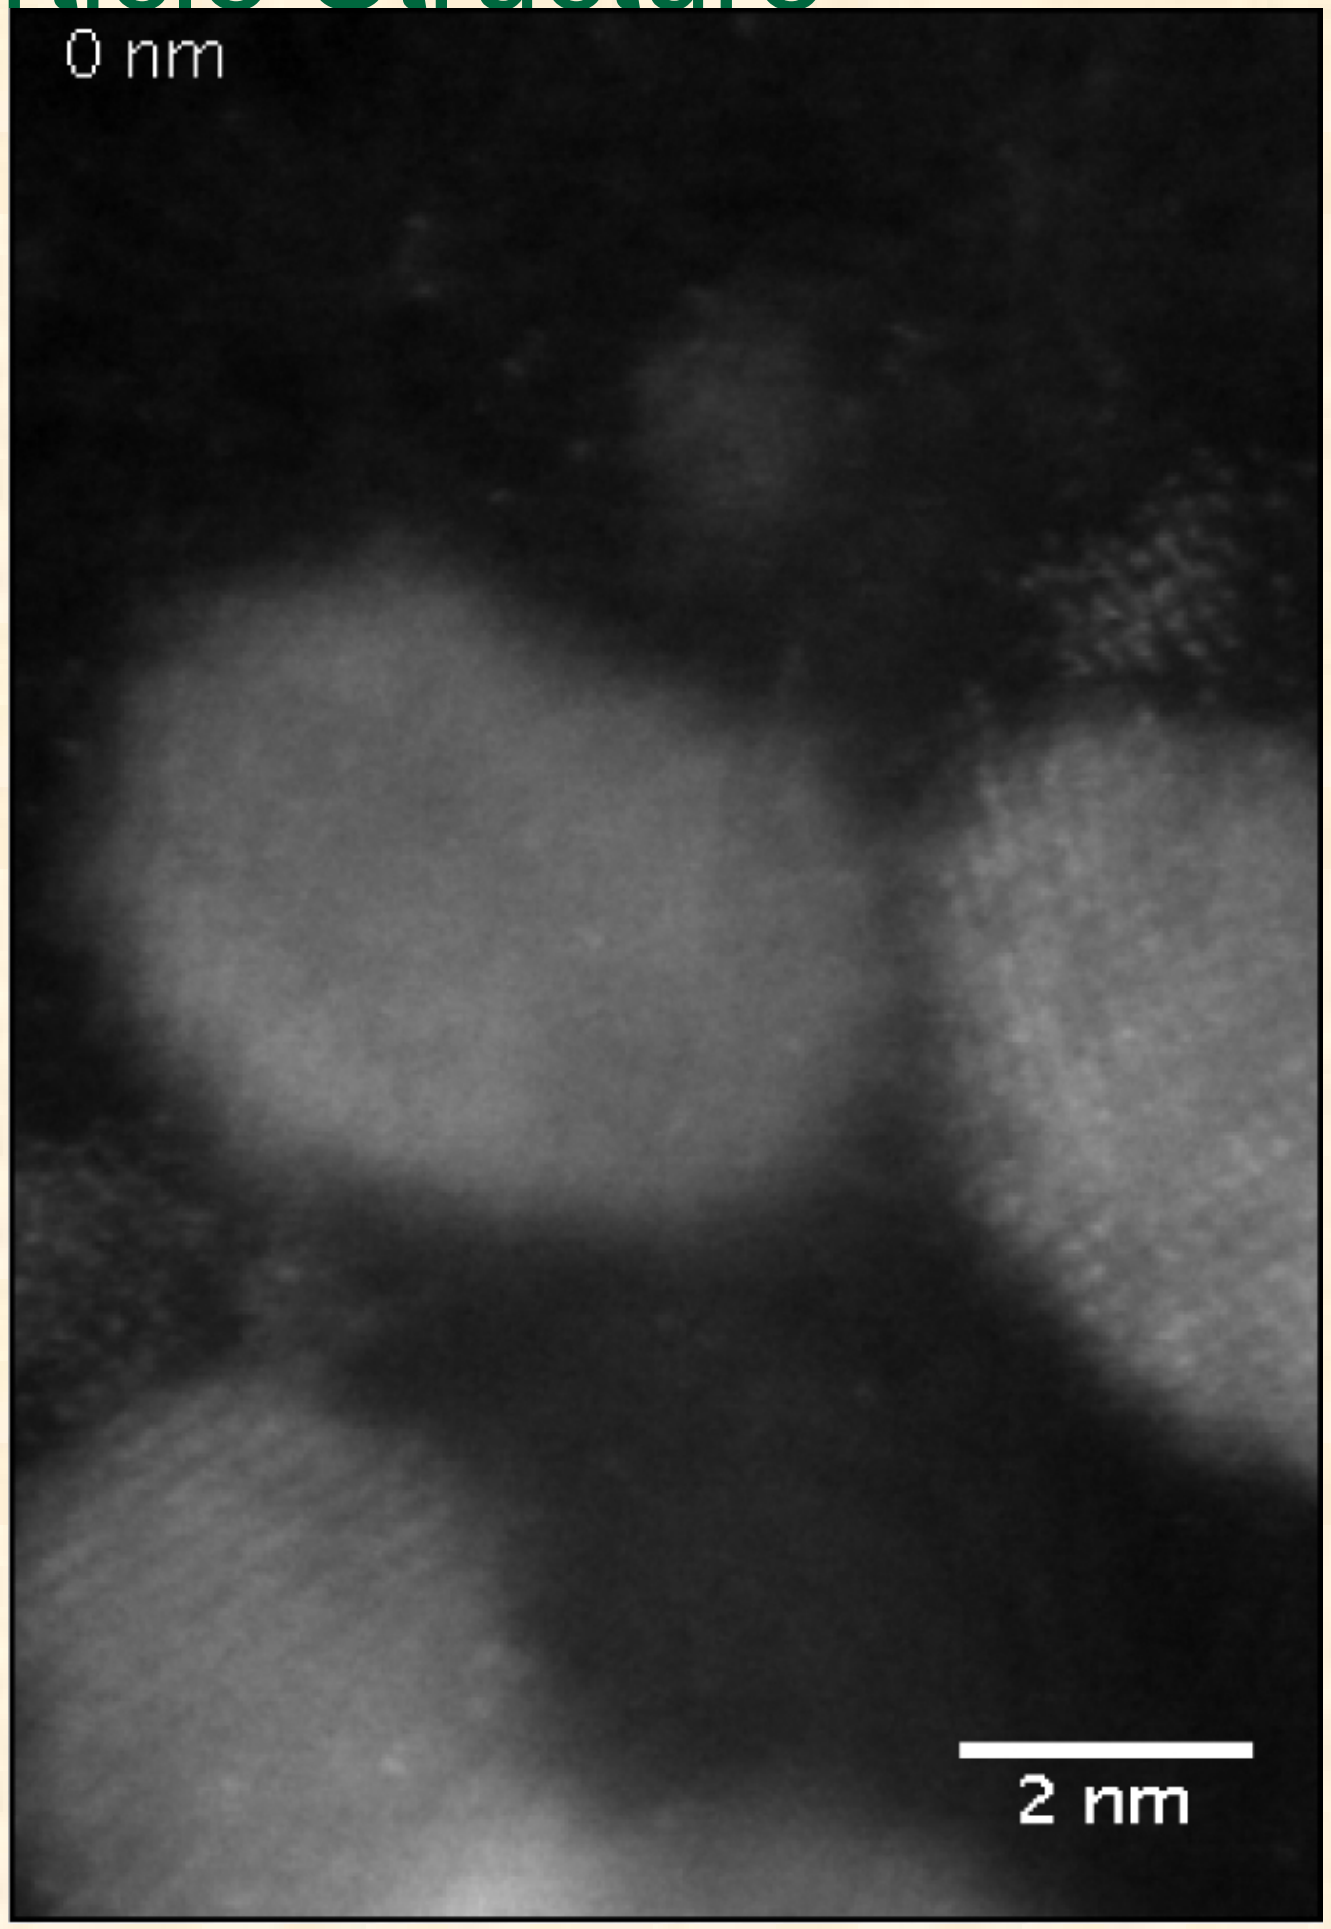

Future Work

- Continue to take necessary steps to design, develop, and implement an *in situ* holder for near live-time, nm-scale microscopy of PEM fuel cell material constituents under relevant operating conditions - temperature, potential cycling, humidity.
- Statistical analysis of catalyst nanoparticle coalescence (with and without ionomer) as a *f*(T,RH,V).
- Design *in situ* experiments to understand mechanisms of carbon support degradation.
- Further develop the 3D STEM technique for catalyst nanoparticles.
- Continue to establish collaborations with industries, universities, and national laboratories (including access to ORNL User Facilities) to facilitate "transfer" of unique capabilities.
- Support new DOE projects with microstructural characterization and technique development.

Summary

- Many new collaborations have been established during the past year that have “taken advantage of” the unique imaging (microscopy) capabilities at ORNL:
  - Work-for-Others (proprietary research)
  - Shared Research Equipment (SHaRE) User Program (non-proprietary research) - University of Houston, RPI
  - Baseline PEM-MEA Characterization Program (non-proprietary)
- Significant progress is being made in developing *in situ* STEM as a viable technique to follow degradation of PEMFC materials (step-by-step approach)
- 3D STEM and image reconstruction is an extremely useful technique to look at the tomography of bulk agglomerates as well as individual nanoparticles