



Enlarging the Potential Market for Stationary Fuel Cells Through System Design Optimization



2011 Hydrogen & Fuel Cells Program Annual Merit Review

**Darlene Steward
National Renewable Energy Laboratory**

**Washington DC
May 9-13, 2011**

Project # FC083

This presentation does not contain any proprietary, confidential, or otherwise restricted information.

NREL is a national laboratory of the U.S. Department of Energy, Office of Energy Efficiency and Renewable Energy, operated by the Alliance for Sustainable Energy, LLC.

Overview

Timeline

Start: January 2011

End: 10/2011*

Complete: 30%

Budget

Total Project Funding: \$300k

– 100% DOE-funded

FY2011: \$300k

*Project continuation and direction determined annually by DOE.

Barriers

Stove-piped/Siloed

Analytical Capability [4.5.B]

Suite of Models and Tools
[4.5.D]

Unplanned Studies and
Analysis [4.5.E]

Reviewers/Partners

UC Irvine

Colorado School of Mines

DTI

Relevance – Complex Interactions Between Buildings and Fuel Cells Must Be Captured for Optimized Results

Attributes of potential CHP applications

Building stock characteristics

- Building use characteristics
- Building age distribution
- Existing versus new construction

Climate

Fuel costs

Objective:
Answer the question:

What are optimum fuel cell types, sizes, and control strategies to meet economic and environmental goals?

Model fuel cells in realistic combined heat and power and combined cooling, heat and power applications to provide guidance for design and manufacturing of stationary fuel cells

Attributes of fuel cells

Performance characteristics

- Efficiency and response time
- Safety
- Durability and maintenance

Manufacturing Economics

- Manufacturing methods versus type
- Design for manufacturing
- Economies of scale versus economies of number

Approach - Model Must Link Distinct Functions to Meet the Objective

The model must analyze the tradeoffs between manufacturing fuel cells that are perfectly matched to every application and fuel cells that are economical to manufacture.


Two sub-functions must be optimized together;

1. A model to analyze fuel cells' interactions with various building types and occupancy patterns in various climates.

Input	Output
Building information (load profiles)	Fuel consumed
Regional fuel prices	Electricity and heat produced
Fuel cell size, performance and cost	Net cost of energy
	Net environmental impact

2. A model to estimate the cost associated with manufacturing fuel cells of various types and sizes at various production rates

Approach - FY 2011 Project Tasks

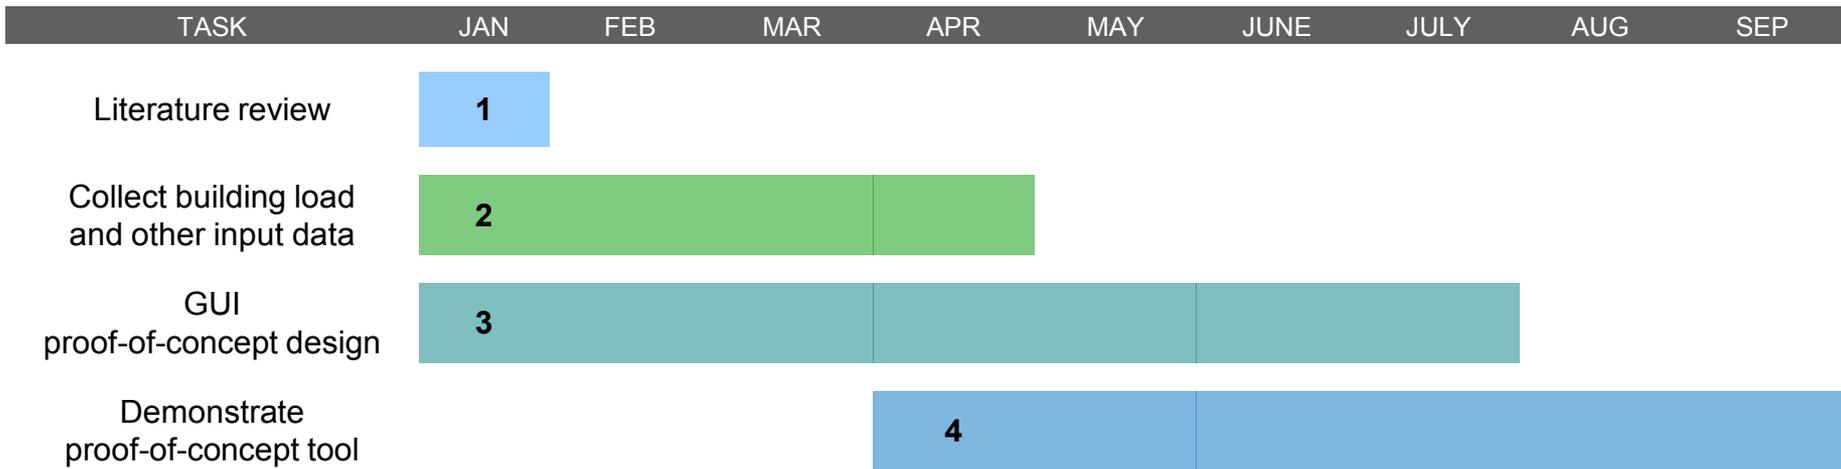

1. **Literature review** – Gather information about existing fuel cell and CHP models with the goal of:
 - Identifying useful modeling strategies
 - Identifying potential benchmarks for model validation
2. **Collect building load and other input data** – Initially, much of this effort will emphasize:
 - Identifying data gaps
 - Assessing data quality/needs
3. **GUI proof-of-concept design** – Initial emphasis will be on defining the output from the model to meet the overall objective
4. **Demonstrate proof-of-concept tool** – The goal is to have a working model that is capable of giving preliminary results that are reasonably accurate.

Approach - Literature Review

TASK

IAN

FEB

MAR

APR

MAY

JUNE

JULY

AUG

SEP

Literature review

1



Task 1

Build Knowledge Base

Literature review of existing models

- **Fuel cell models** (level of detail, control strategies)
- **Building models** (level of detail, potential for integration with FC CHP)
- **CHP models** (level of detail, technologies, strategies for integration with existing and new buildings)
- **Obtain models for benchmarking**

Source for graphic: Estimating future prices for stationary fuel cells with empirically derived experience curves, I. Staffell, R.J. Green, International journal of hydrogen energy 34 (2009) 5617–562

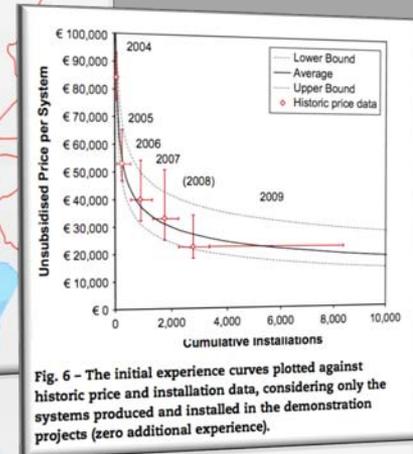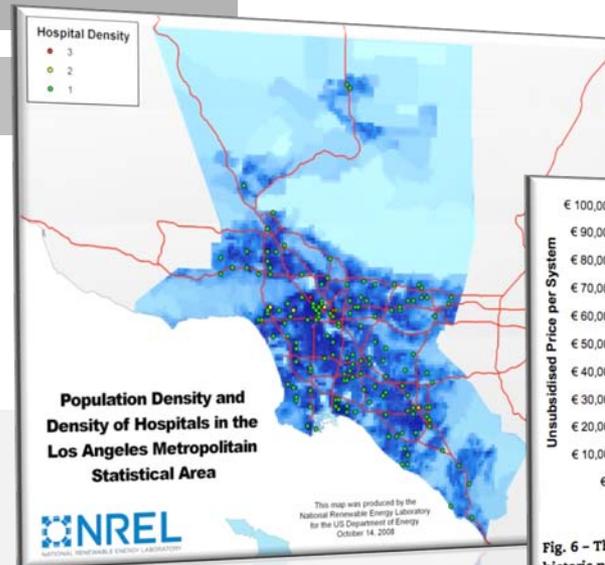

Approach - Collect Input Data

TASK	JAN	FEB	MAR	APR	MAY	JUNE	JULY	AUG	SEP
------	-----	-----	-----	-----	-----	------	------	-----	-----


Literature review

1

Collect building load and other input data

2

Task 2

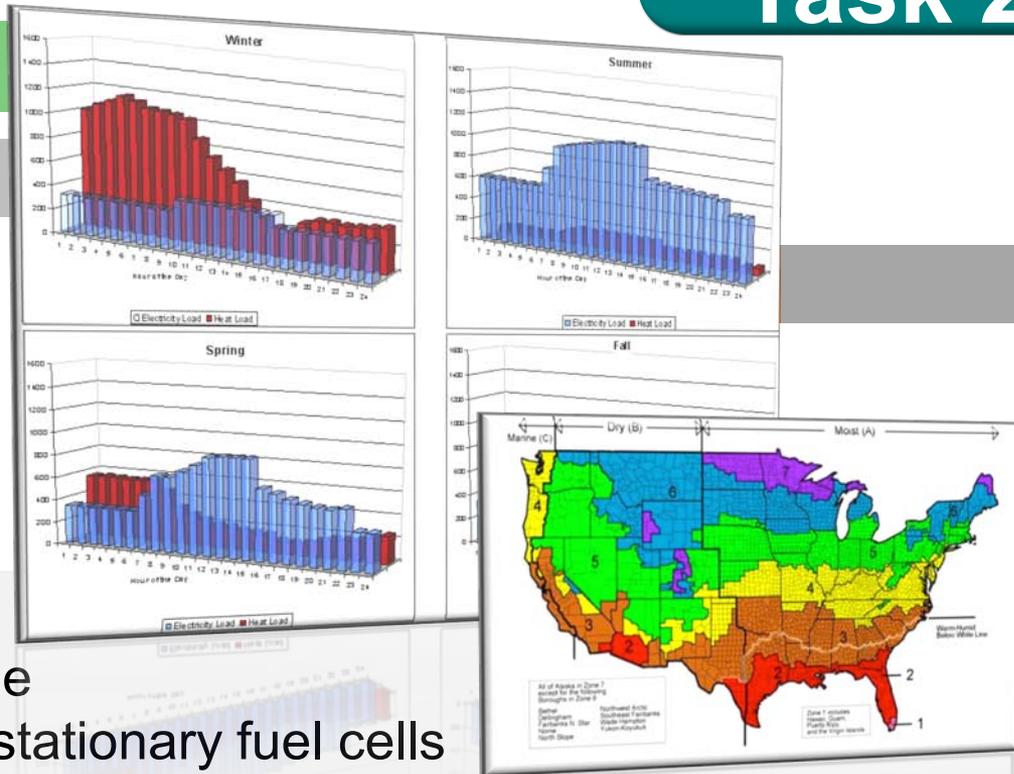

Define scope and ID gaps

- Attributes of buildings, climate, fuel prices and emissions define the application topography for stationary fuel cells
- Attributes of fuel cell manufacturing and performance define the topography of fuel cell costs and suitability for particular applications.

Approach - GUI Proof-of-Concept Design

TASK	JAN	FEB	MAR	APR	MAY	JUNE	JULY	AUG	SEP
------	-----	-----	-----	-----	-----	------	------	-----	-----

Literature review

1

Collect building load and other input data



2

GUI proof-of-concept design

3

Task 3

Build model components

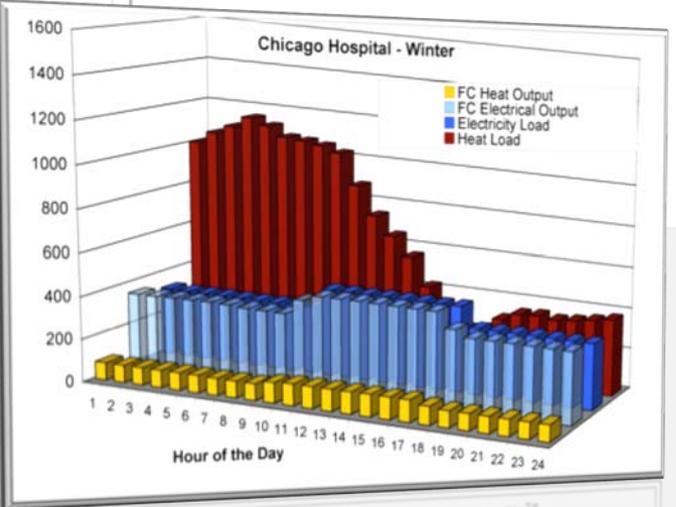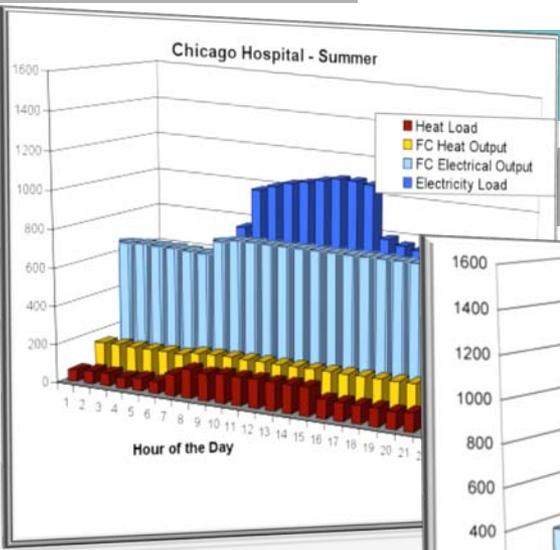


- Defining the desired output up-front keeps the modeling effort on-track

Approach - Demonstrate Proof-of-Concept Tool


TASK	JAN	FEB	MAR	APR	MAY	JUNE	JULY	AUG	SEP
Literature review	1								
Collect building load and other input data	2								
GUI proof-of-concept design	3								
Demonstrate proof-of-concept tool				4					
Obtain initial results									

Task 4

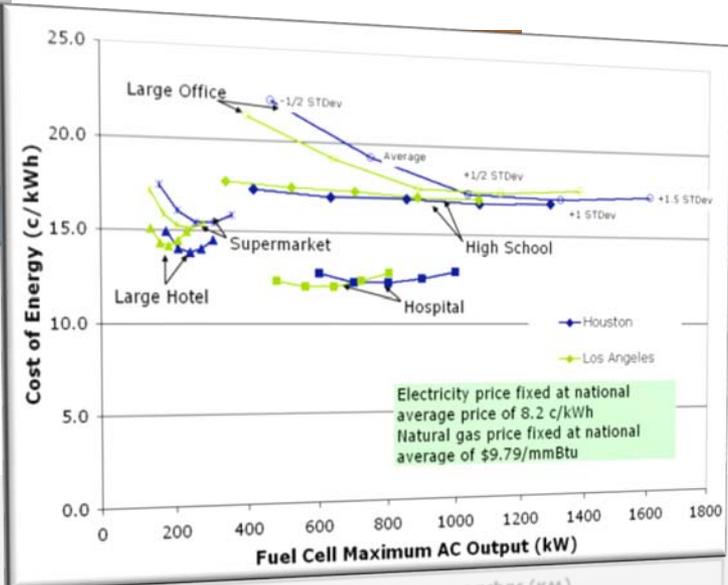


- QC and validate sub-models
- Preview simple optimization scenarios
- Review model input and output

Accomplishments – GUI Main Screen Design

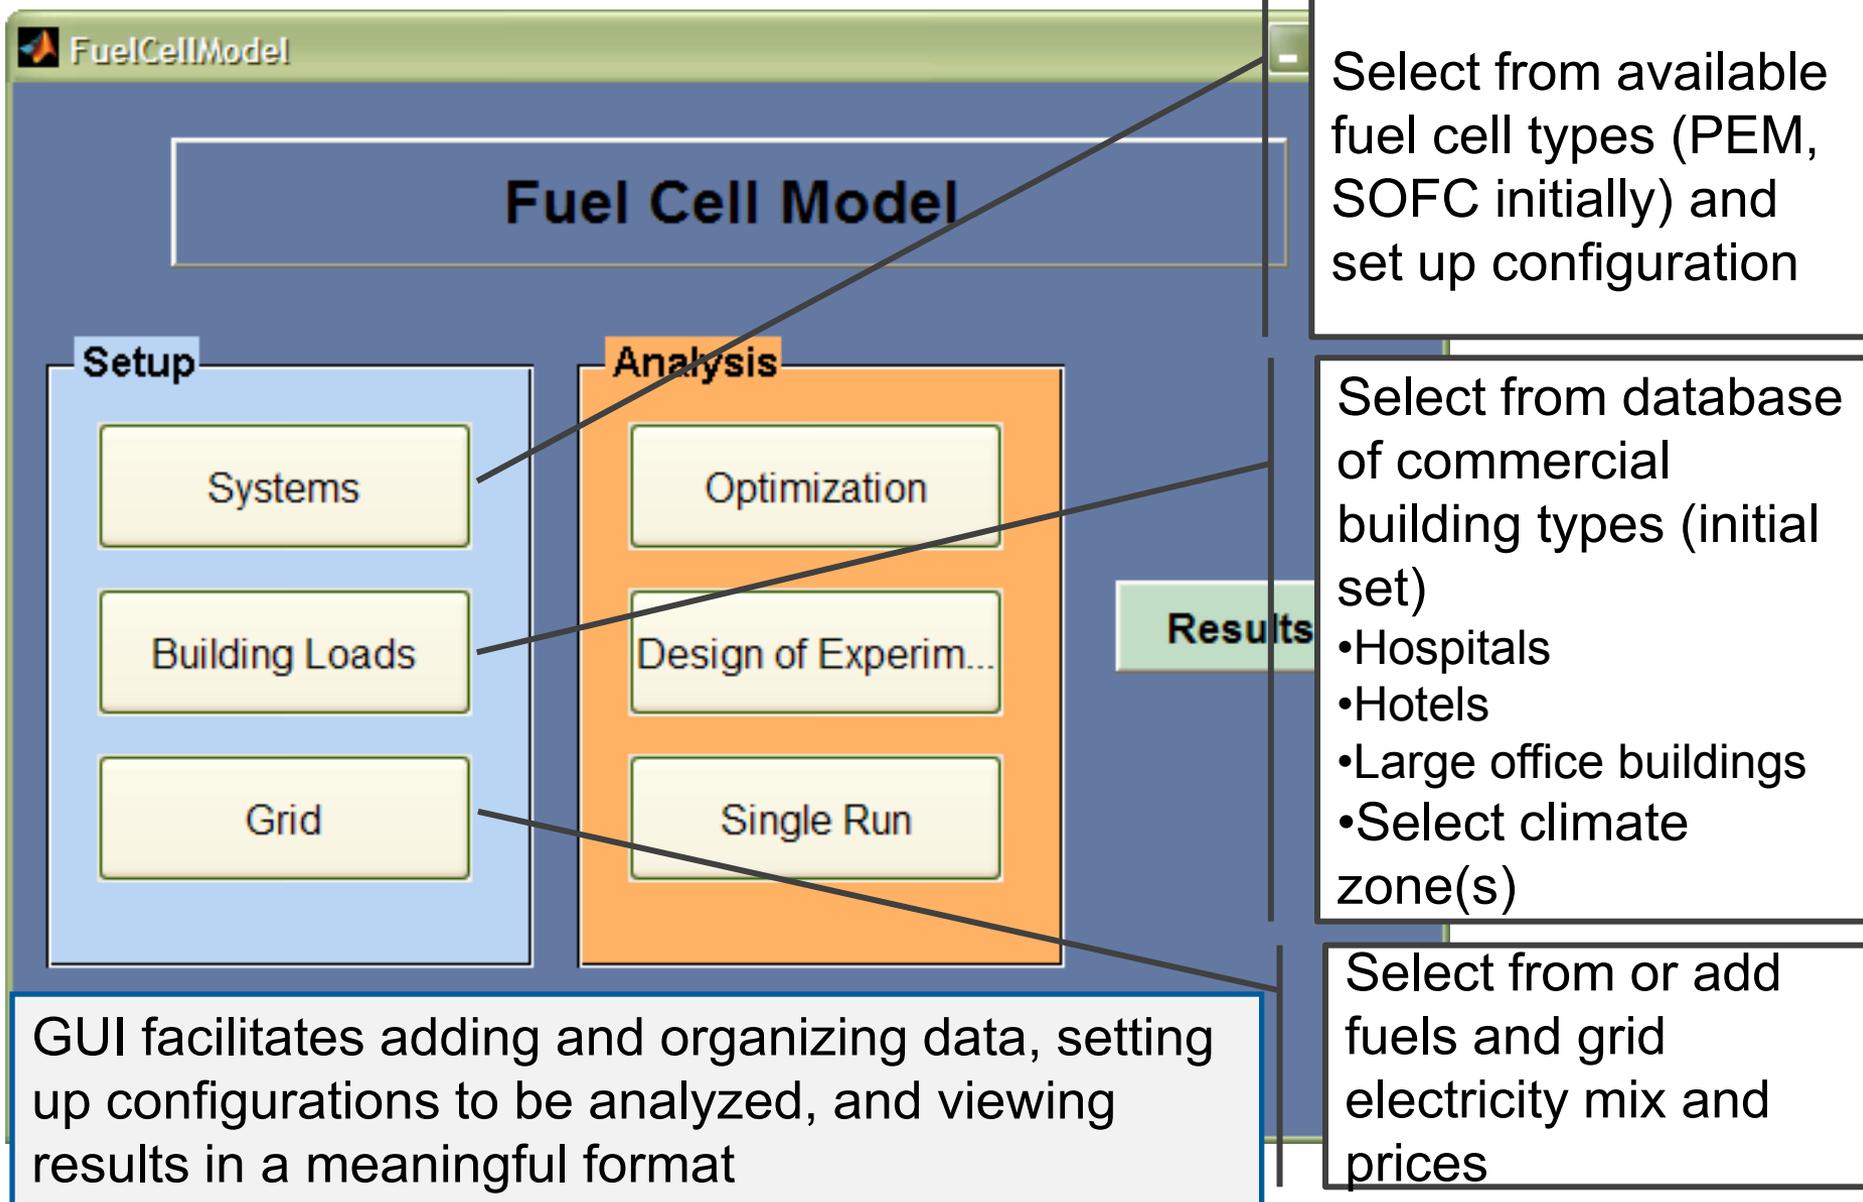

Accomplishments – GUI System Setup Screen Layout

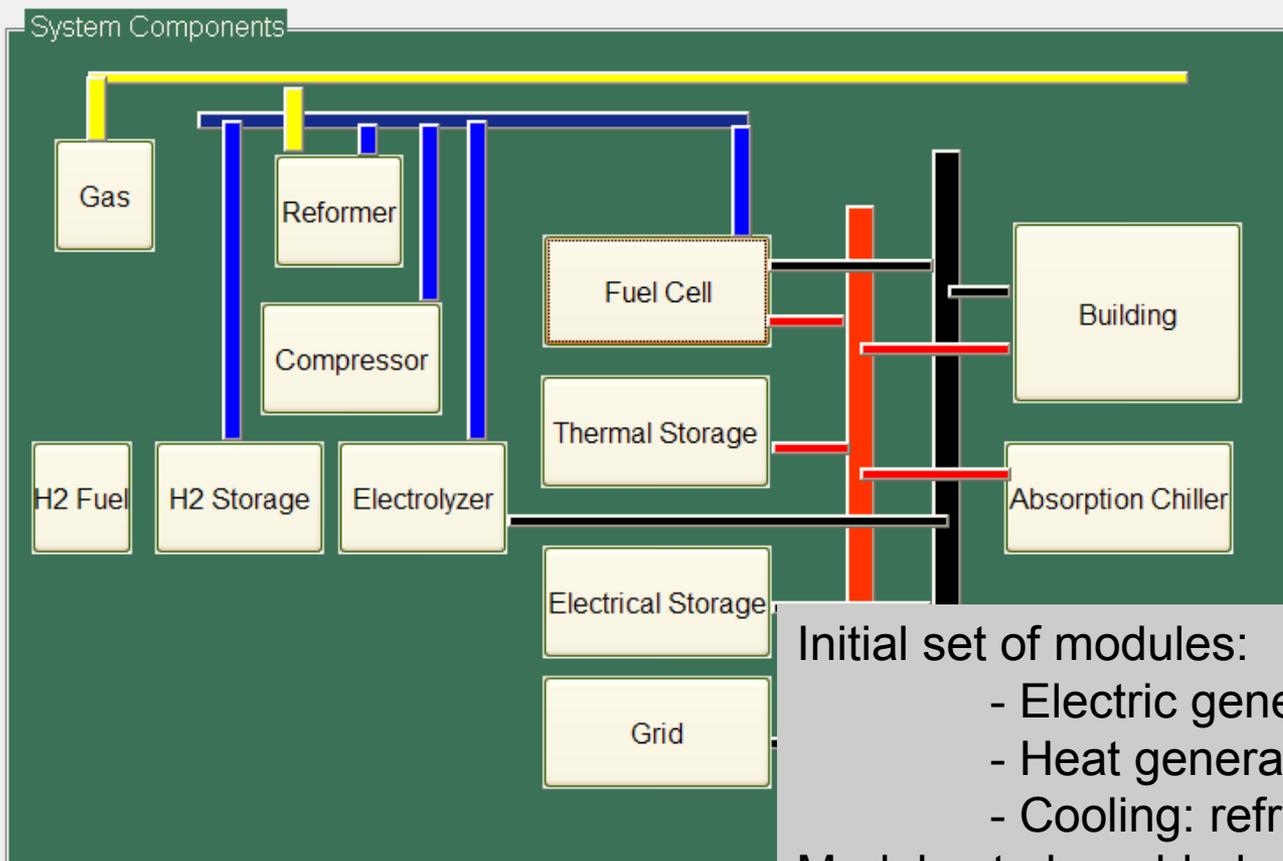

New modules can be added and modules can be hooked together in different ways depending on the desired control strategy and optimization goal

Initial set of modules:

- Electric generators: fuel cells, grid
- Heat generators: boilers, fuel cells
- Cooling: refrigeration cycle, absorption

Modules to be added after initial model validation:

- Electric generators: micro-turbines, gen set
- Energy storage: hot and cold thermal storage
- Renewables: solar PV, solar thermal

Accomplishments – Design of Fuel Cell CHP/CCHP Model

- Initial module design in Excel to facilitate testing and QC. Once validated, code is translated to Matlab®.
- Modular design allows maximum flexibility in system configuration and control strategy.

Flexible energy modules

- can be prioritized and controlled independently
- provide output to controller and input to other modules

Variable time step (ex: 1 second to 1 hour)

- can simulate fast transients
- can simulate grid outage
- can simulate backup power generators

Model is being designed for high speed operation

- optimization of fuel cell sizes
- sensitivity analysis
- analysis of large number of buildings



Initial set of modules and control algorithm to be completed by July 31, 2011

Accomplishments - Energy Control Strategy Developed

Power
Generation 1



I can provide:

5 to 25 kW electricity
1 to 10 kW thermal
4¢/kWh-e*
925 lb GHG/MWhe



Energy Controller


Each time step, energy controller collects bids from energy modules.

- Electric generators: fuel cells, turbines, gen sets, grid power
- Heat generators: boilers, fuel cells, turbines, gen sets
- Cooling: refrigeration cycle, absorption, evaporative
- Energy storage: heat, cooling (future capability)
- Renewables: solar PV, solar thermal (future capability)

*variable cost portion of power generator cost based on fuel price

Controller can be programmed to base prioritization on different optimization goals.

Accomplishments - Energy Control Strategy Continued

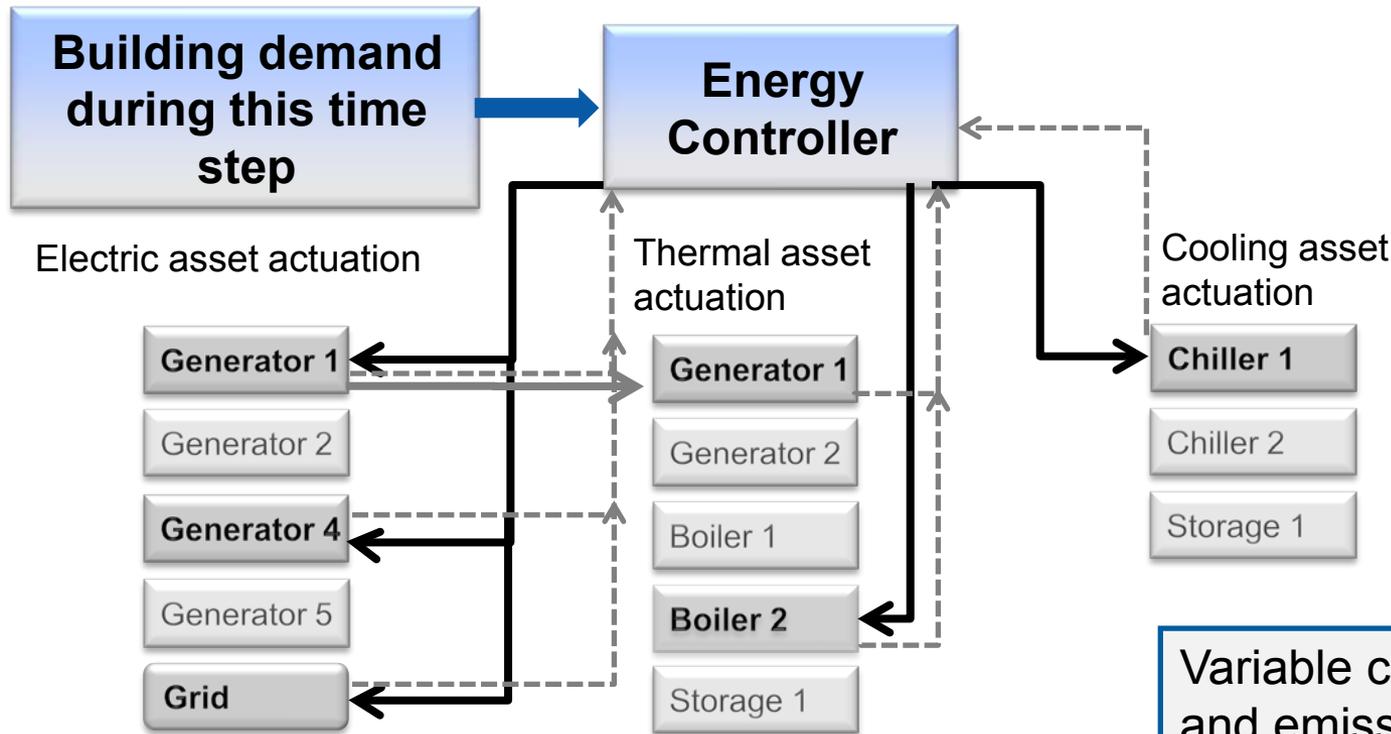

Actuation:

-  Hardware is actuated according to controller based on demand, control strategy and module capabilities
-  Modules provide information to other modules
-  Modules provide feedback to the controller


Energy, Emissions, and Economic assessment:

- Fuel usage and price
- Energy and emissions output



Variable cost, energy and emissions data collected in each time-step are aggregated and input into the economic model along with capital costs from the fuel cell manufacturing model

Accomplishments – Optimization Strategy

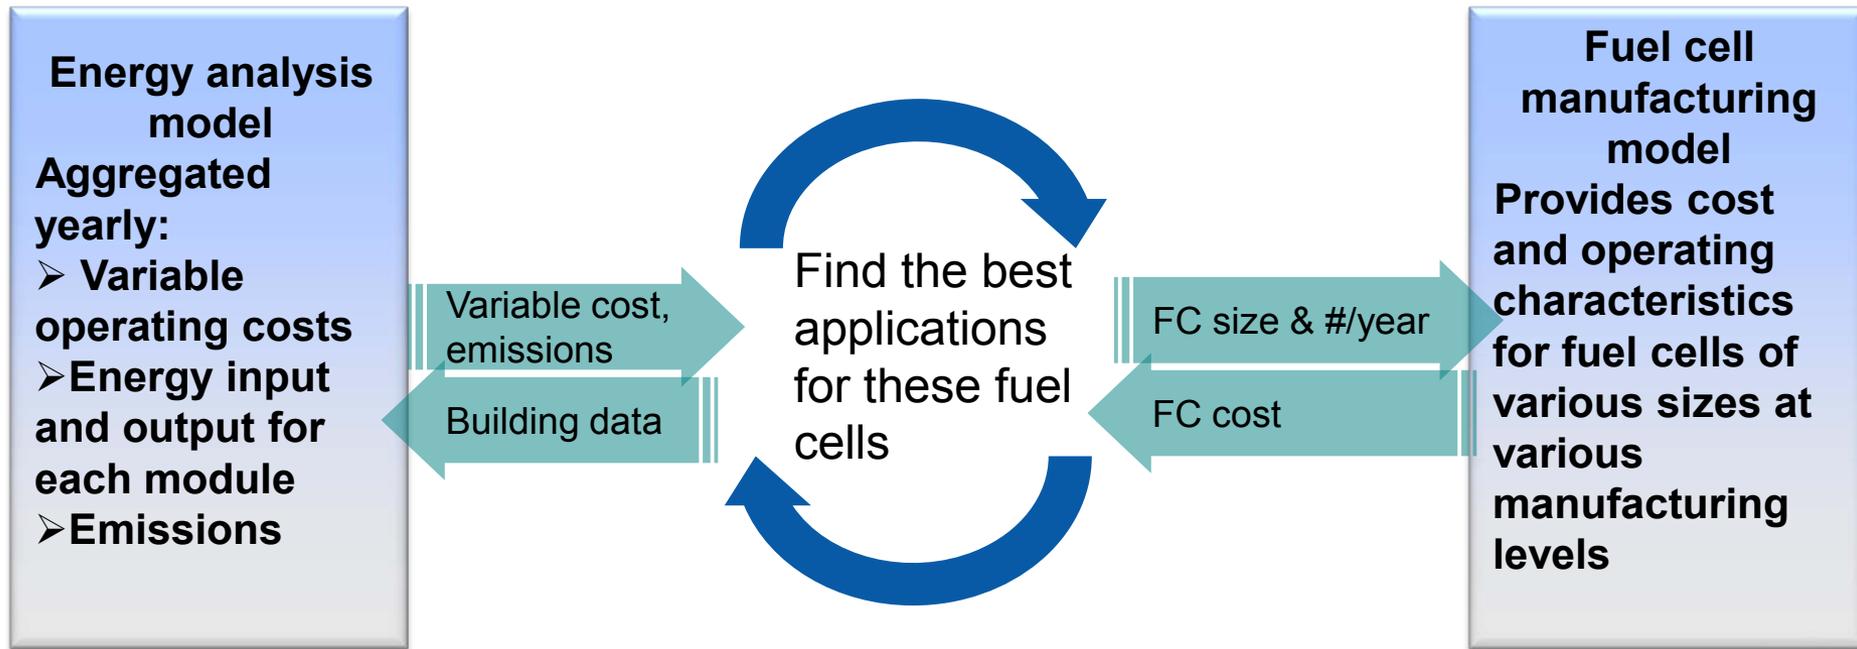

The optimization strategy successively selects a fuel cell size and manufacturing rate then finds the best applications within the building dataset. The process is repeated to find the best fuel cell size and manufacturing rate.

Summary – A Detailed and Flexible Model Is Being Developed To Guide Research and Manufacturing of Stationary Fuel Cells


Tasks 1 and 2

- Existing models for benchmarking, partners, and reviewers have been identified.
- Attributes for an initial set of buildings, climate, fuel prices, and emissions have been collected and entered into an extensible database.
- Attributes of fuel cell manufacturing and performance have been collected or estimated for an initial set of fuel cells (PEM and SOFC).

Tasks 3 and 4

- The layout and primary functional screens of the user interface have been developed.
- Sub-modules have been developed for the initial set of equipment
- A flexible control strategy has been developed.

Planned Future Work

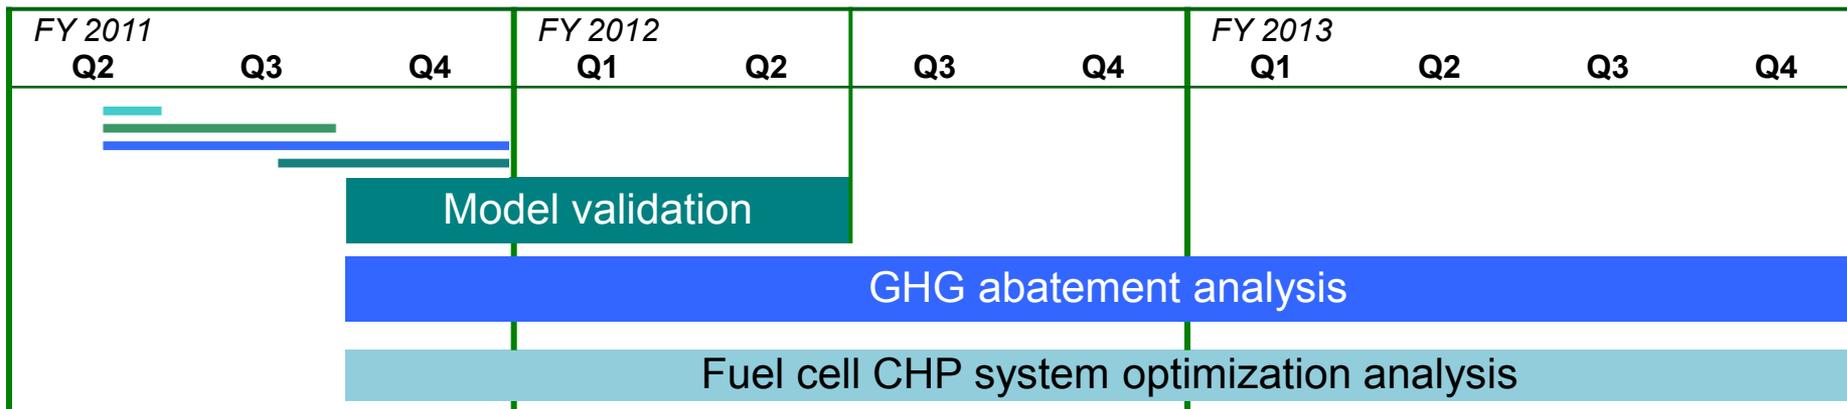

Additional model capabilities

- Interface with building models/or incorporate simple building modeling capability
- Enhanced environmental analysis capabilities
- Built-in comparison to other CHP technologies
- Batteries and/or thermal storage
- Multi-building/district heating scenarios
- Hydrogen production for vehicles