Highly conductive, stable and robust hydroxide exchange membranes based on poly(aryl piperidinium)

Award: DE-AR0000771

Yushan Yan (PI), Bingjun Xu, Shimshon Gottesfeld, University of Delaware, Shuang Gu, Wichita State University, Bamdad Bahar, Xergy, and Hui Xu, Giner

Hydrogen as Energy Source

- Pressing need for alternatives to gasoline engine cars to:
  - reduce green house gas emissions
  - meet proposed legislation banning gasoline cars (California, EU, China, etc.)
  - lower oil dependence

	Gasoline[1]	Battery[2]	PEM fuel cell[5]	HEM fuel cell[6]
Zero tailpipe emissions	✗	✓	✓	✓
Range (miles)	460	220-310[3]	312	~300
Refueling time (mins)	5	40 (80%) 75 (100%)[4]	5	~5
Cost (US/kW)	30	57	45	30

1. 2017 V4 Toyota Camry, 27mpg combined. 2. Tesla Model 3. 3. Toyota Mirai. 4. Supercharging. 5. Mobile connector

- Fuel cells are a proven solution but currently too costly due to their acid operating environment
- The fuel cell operational environment is defined by the membrane used
- More applications than fuel cells require stronger membranes than commercially available:
  - Desalination
  - Electrolyzers

HEMFC



PEMFC Cost Breakdown



Settler, B. P., Zhuang, Z., Weikopf, J. A., & Yan, Y. (2016). Activity targets for nanostructured platinum-group-metal-free catalysts in hydroxide exchange membrane fuel cells. *Nature nanotechnology*, 11(12), 1020-1025.
James, B. D., Spisak, A. B. (2012). Mass Production Cost Estimation of Direct H2 PEM Fuel Cell Systems for Transportation Applications: 2012 Update. report by Strategic Analysis, Inc., under Award Number DEEE0005236 for the US Department of Energy. 18.

PAP Advantage

- Combining alkaline stability, high conductivity, and low cost via advanced polymer design and engineering
- **Platform technology:** Opens the doors for new materials to be integrated into devices — **Highest collateral benefit on cost reduction**

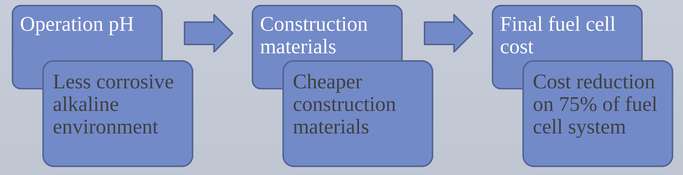

Membrane cost structure



Value for Application



Performance and Stability

Stable conductivity



Alkaline stable

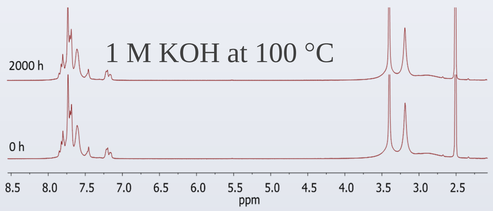

Conducting



Robust

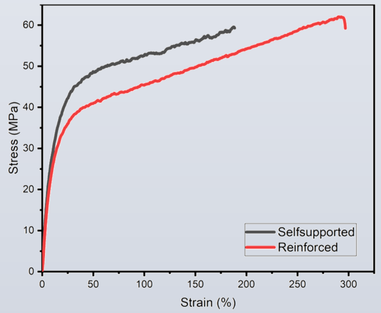

PAP-TP-X Hydroxide Exchange Membrane (HEM)



- Maximize functional groups
- Eliminate weak bonds
- Strong polymer backbone

High-performing Durable

H_2/Air (CO_2 free)

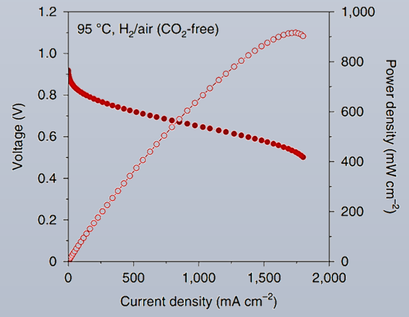



Wang, Junhua, et al. "Poly (aryl piperidinium) membranes and ionomers for hydroxide exchange membrane fuel cells." *Nature Energy* (2019): 1.

Poly(aryl piperidinium) HEM vs. Commercially Available HEMs

		W7Energy	Dioxide Materials	Tokuyama	Fumatech	
Product Name	Units	**Piperion TP-85**	Sustanion X37	A201	FAS-50	FAA-3
Thickness	µm	**20**	50	28	45 - 55	45-50
Ion exchange capacity	meq g^{-1}	**2.2**		1.7	1.6 - 2.0	2.02
Counter ion		**CO_3^{2-}**	Cl^-	OH^-	Br^-	Br^-
Conductivity (25°C)	mS cm^{-1} (wet OH^-)	**80**	70	46	3 - 8 (Cl-)	25
Water uptake	wt%	**60**	90	44	10 - 25	40
Dimensional swelling (in-plane)	% (linear)	**8**	6	2	0 - 1	17
Ultimate tensile strength (50°C and 50%RH)	MPa	**50**			30 -40	
Elongation at break	%	**175**	10-40 (wet)		15 - 60	
Young Modulus	MPa	**425**	20 (wet)		1000-1800	
Recommended Temperature	°C	**< 120**		< 60		
Recommended pH		**0-14**	2-14	0-14	0-11	0-11

Scaling Up

Produced 1Kg of PAP-TP-85 and are testing it for multiple applications. Produced tenths of square meters of roll-to-roll self supporting and reinforced membranes

Non-reinforced membrane with superior ion conductivity, thermal and chemical stability and outstanding mechanical properties

Ionomer with adequate shelf life and ion conductive properties on par with the membrane

Contact Information

Yushan Yan
yanys@udel.edu
(302) 831-2552

Santiago Rojas-Carbonell
src@udel.edu
(505) 814-8369