Accessible PGM-free Catalysts and Electrodes

Jacob S. Spendelow

Los Alamos National Laboratory

Project ID FC318

April 29, 2019

This presentation does not contain any proprietary, confidential, or otherwise restricted information

Overview

Timeline:

- Project Start Date: October 1, 2018
- Project End Date: September 30, 2020

Budget:

- Total Project Budget: $1M
- Total DOE Funds Spent: $60K (03/01/2019)

Barriers

A. Durability

B. Cost

C. Performance

Partners

- LANL (Jacob S. Spendelow, Mahlon Wilson, Siddharth Komini Babu, M. Aman Uddin)

Relevance

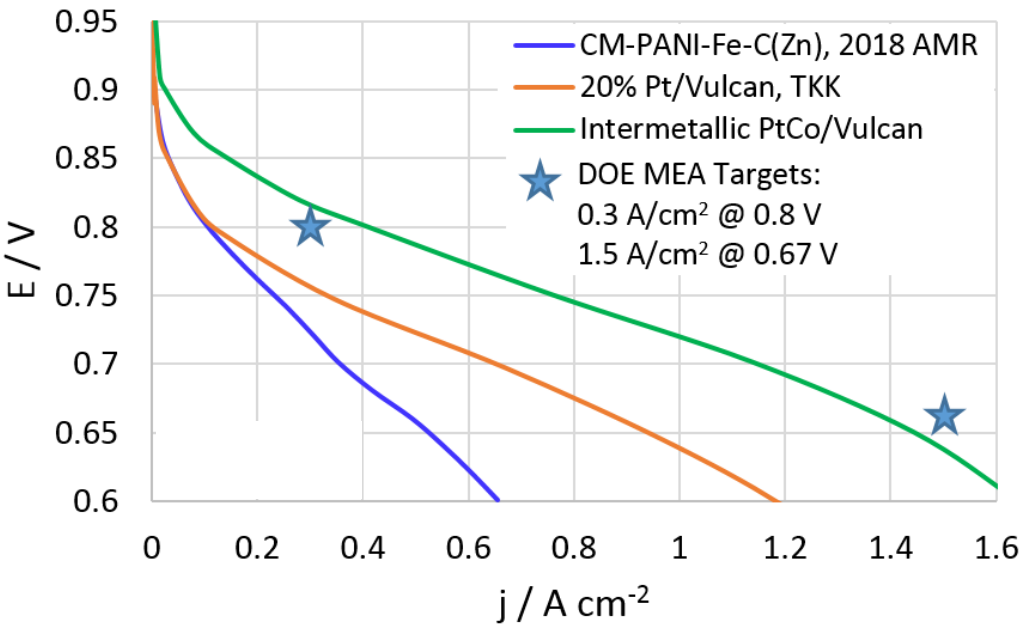

PGM-free at 0.67 V: **0.31 W/cm²**
DOE MEA target: **1 W/cm²**
Future MEA target: **1.5 W/cm²?**

- **To achieve target power densities, improvements in electrode transport and in catalysis are needed**
- **This project will address both**

Background: Cathode Structure

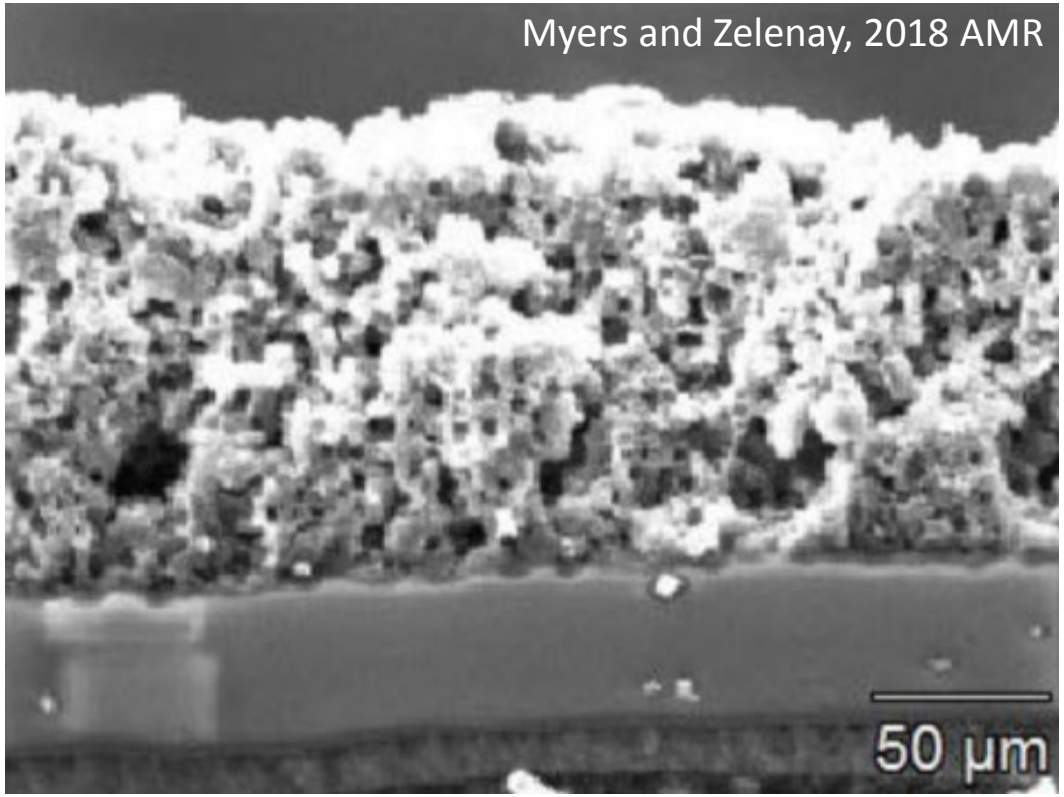

PGM-free Cathode
[(CM+PANI)-Fe(Zn)-C]



PGM Cathode
[TEC10E40E]

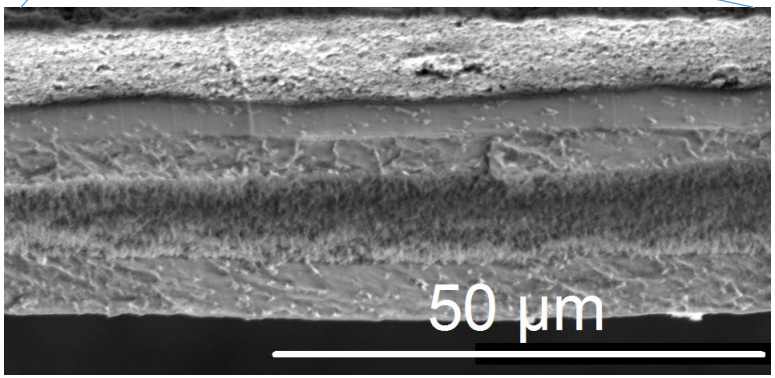

PGM-free cathode is much thicker and coarser

O_2 Transport Limitations

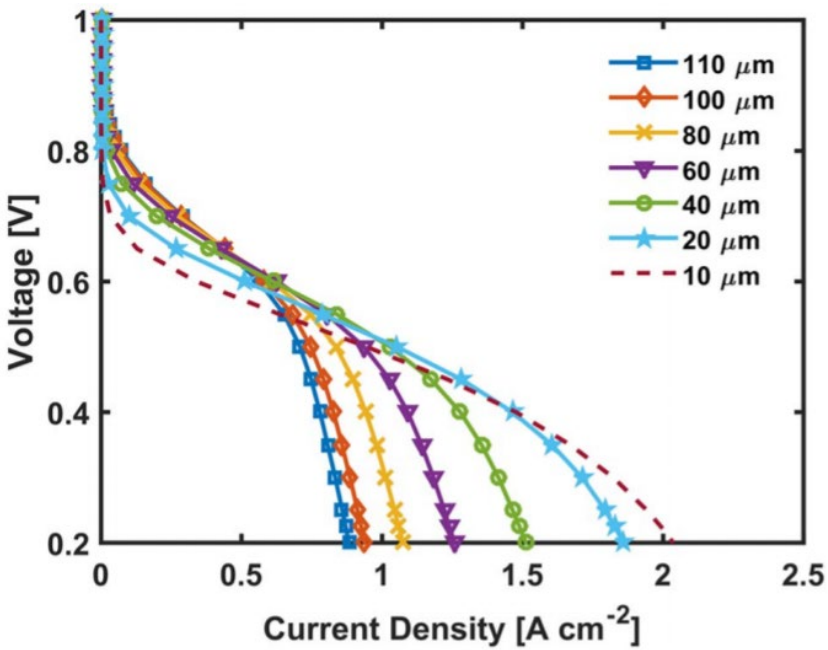

Figure 9. Effect of thickness on the 50 wt% Nafion loading CM-PANI-Fe electrode. The simulation was run at 80°C and 100% RH H_2 and air feed gas at 1 atm partial pressure.

S. Komini Babu et al. JECS 2017 (164) F1037-F1049

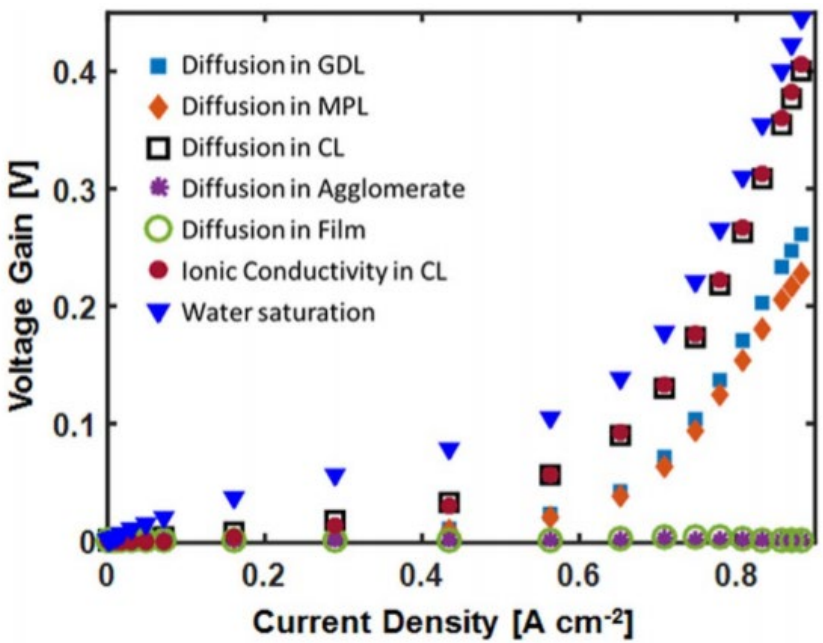

Figure 6. Voltage gain due to different resistance in the electrode for the 50 wt% Nafion electrode. The model was run with H_2 and air fully humidified gas at 80°C and 1 atm partial pressure.

- Model calculations suggest significant effect of electrode thickness on O_2 transport
- O_2 transport in electrode causes several hundred mV loss at high currents

H^+ Transport Limitations

Comparison with PGM-based MEAs suggests major H^+ transport limitations

Item	Description
Cathode catalyst	30% PtCo/HSC-a 0.1 mg_{Pt}/cm^2
Cathode ionomer	Mid side chain 0.9 I/C (EW825)
Membrane	12 µm PFSA
Anode catalyst	10% Pt/C 0.025 mg_{Pt}/cm^2
GDL thickness	235 µm

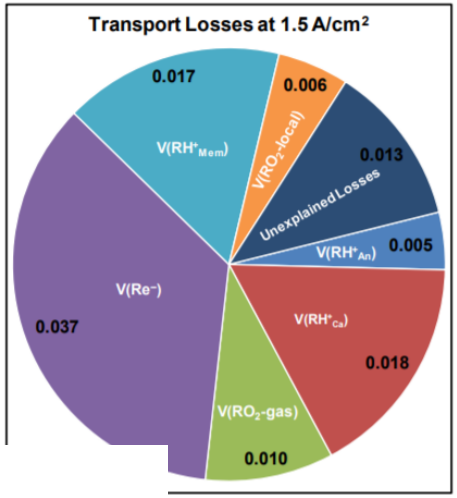

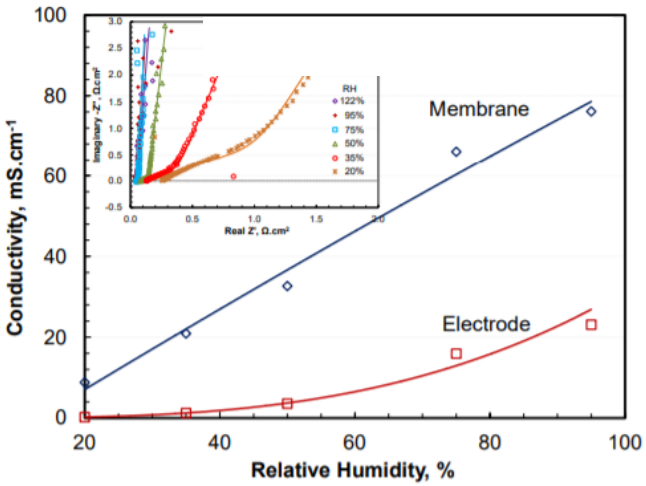

- H^+ resistance in cathode causes ~20 mV loss in ~5 µm PGM-based CCL
  - First approximation: **~400 mV loss** in ~100 µm PGM-free CCL
- H^+ resistance in 12 µm membrane causes ~15 mV loss
  - Suggests that electrode with 5-10X higher thickness and 5-10X lower conductivity could cause **several hundred mV loss**

Active Site Density

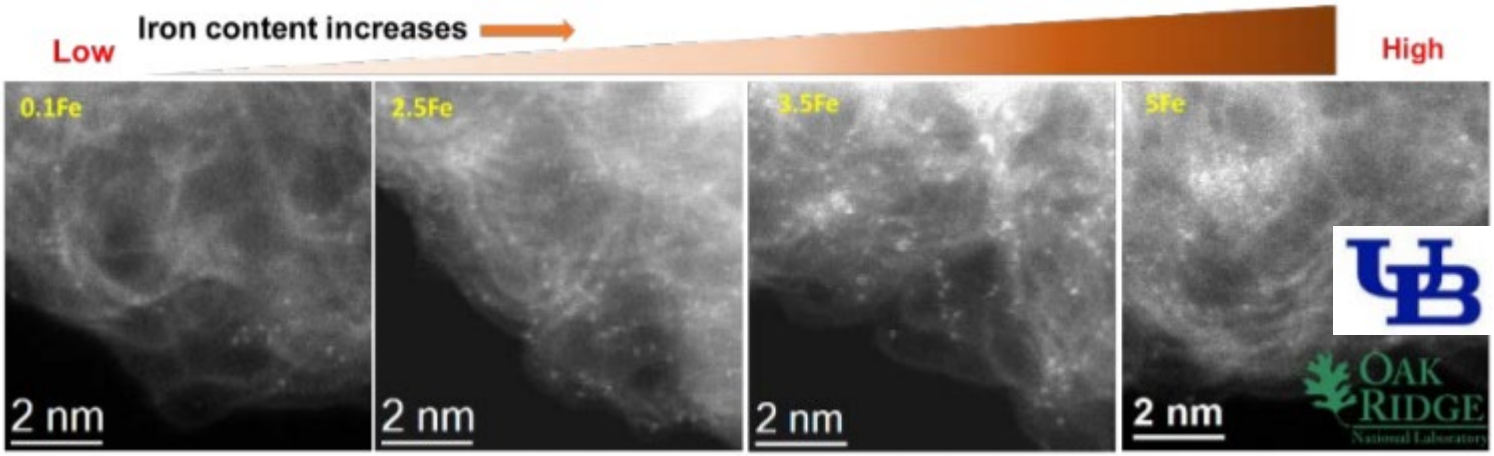

Litster, 2018 AMR

- Active site density is low: ~3×10^{12} sites/cm^2 on atomically-dispersed Fe-N-C (Myers and Zelenay, 2018 AMR), vs. ~10^{14} sites/cm^2 on 20%Pt/Vulcan
- Increasing Fe loading causes clustering and decrease of ORR activity

Approach

Develop PGM-free MEAs with facile transport of O_2, H^+, H_2O, and e^- at

- **Micron scale (accessible electrodes)**
- **Nanometer scale (accessible catalysts)**

Accessible electrodes will be fabricated using non-tortuous transport channels

Accessible catalysts will be fabricated using structural control at nanoscale

Objective: *create innovative catalyst and electrode structures that enable PGM-free electrodes to have high-current performance approaching that of PGM-based electrodes*

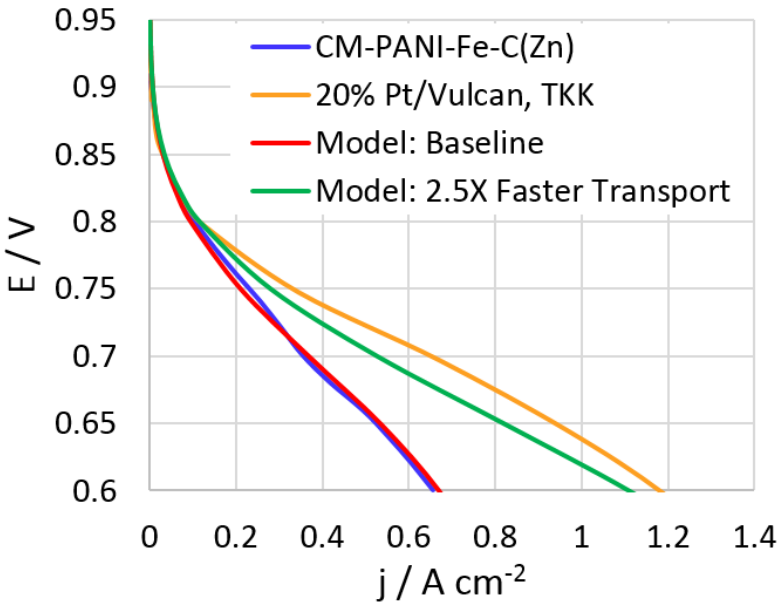

Model: S. Komini-Babu et al. JECS 164 (2017) F1037-F1049

Milestones

12/18	Fabricate H^+ channel electrodes and perform initial testing.
3/19	Perform initial templated catalyst synthesis.
6/19	Provide initial multiscale modeling results to guide electrode design.
9/19	Demonstrate MEA performance of 0.025 A/cm^2 at 0.9 V H_2/O_2 and 0.5 A/cm^2 at 0.67 V H_2/air (150 kPa_{abs}) (Go/No-go)
12/17	Demonstrate H^+ transport in catalysts without ionomer.
3/18	Demonstrate multi channel electrode structures in MEA testing.
6/18	Test durability on drive cycle for 500 hours.
9/18	Demonstrate MEA performance of 0.044 A/cm^2 at 0.9 V H_2/O_2 and 0.75 A/cm^2 at 0.67 V H_2/air (150 kPa_{abs}).

Accomplishments: Proof-of-concept Accessible Electrode Structures

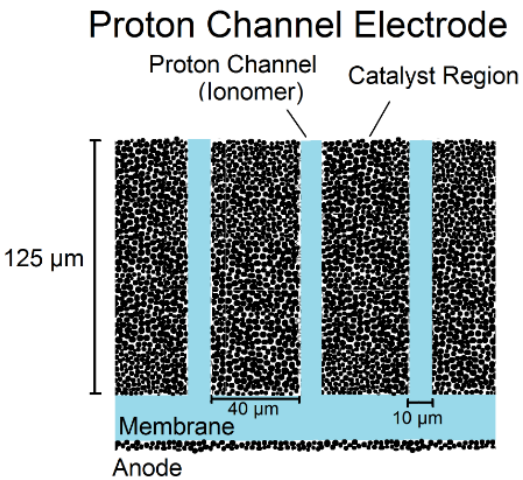

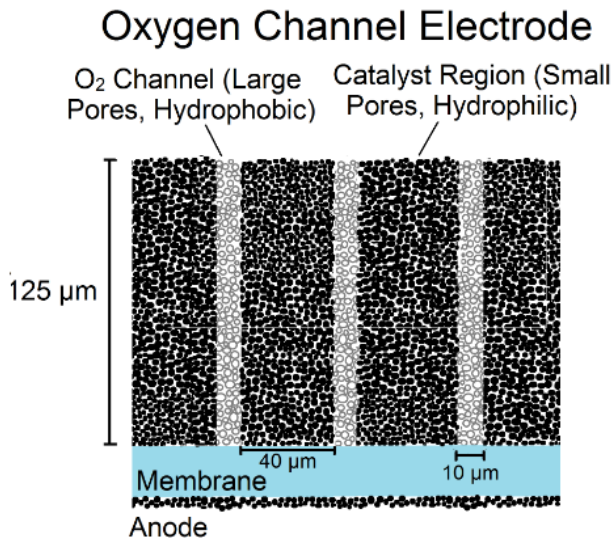

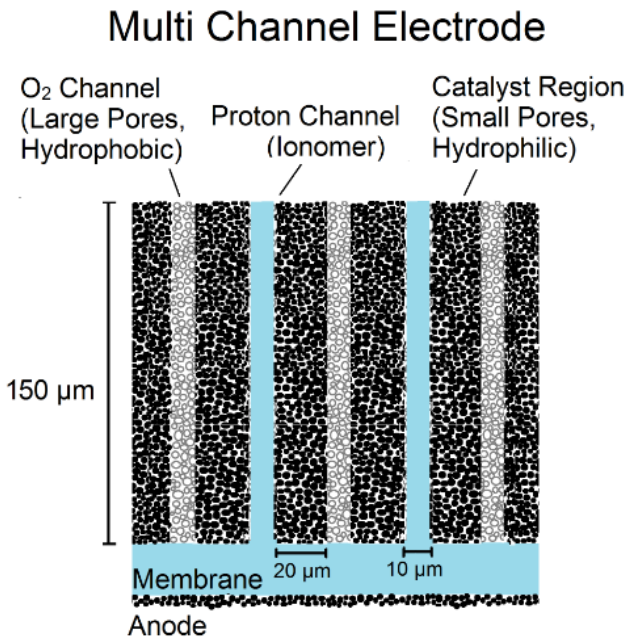

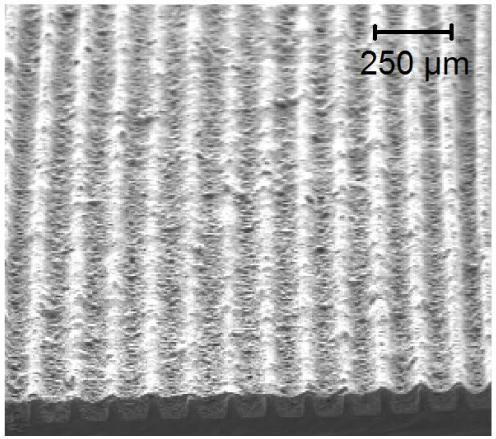

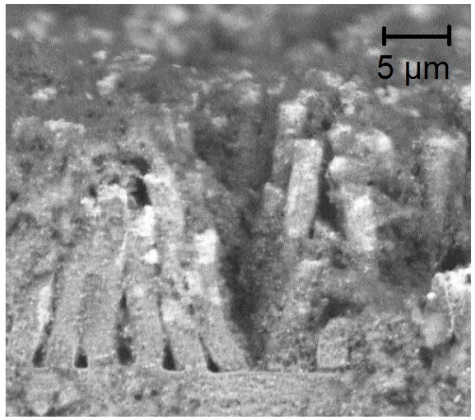

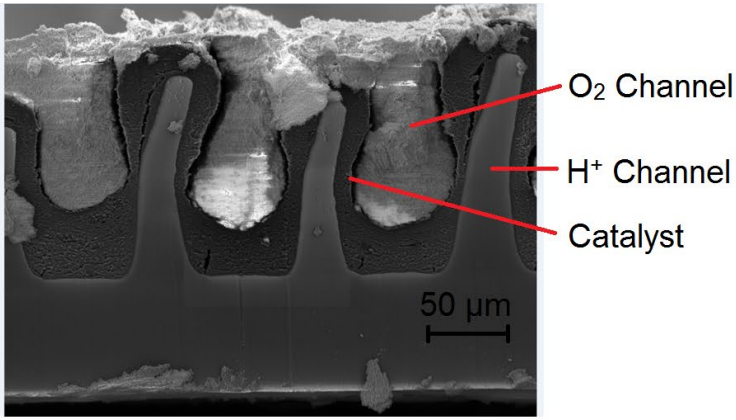

Accessible Catalysts

- Control of hierarchical electrode structure to enable effective O_2 transport at nanoscale
- Use of mesoporous templates to control particle size and aspect ratio, while limiting metal clustering

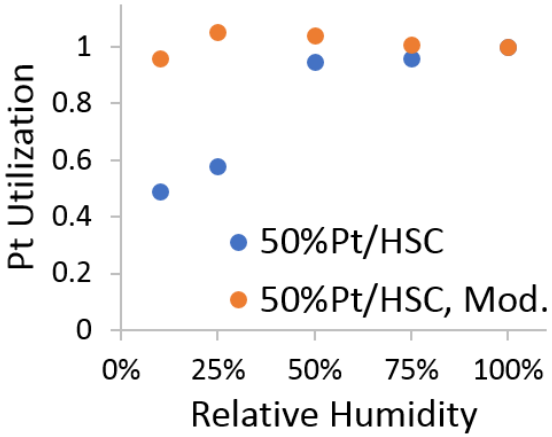

- Modification of pore structure and surface properties to control agglomeration and enable effective H^+ transport at nanoscale

Leveraging Electrode Work

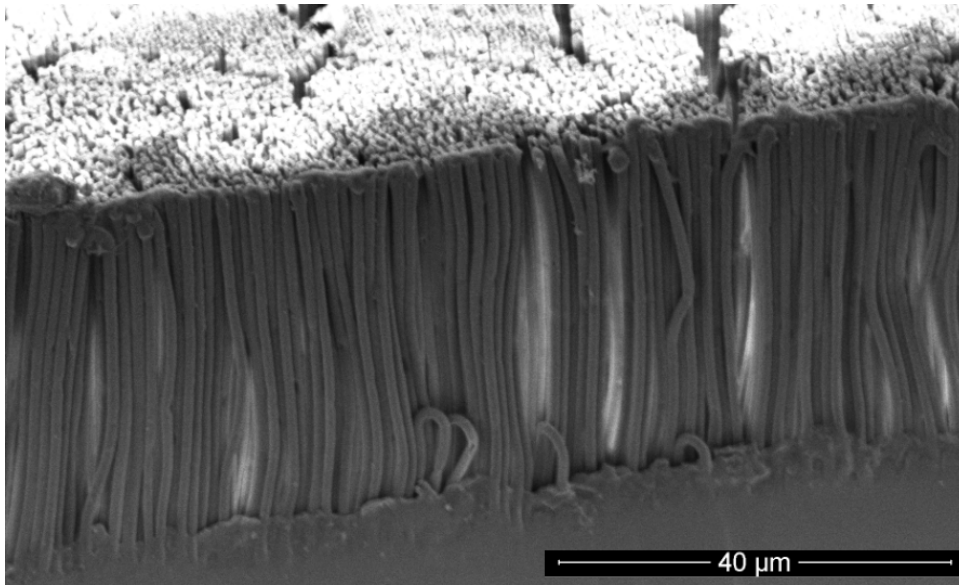

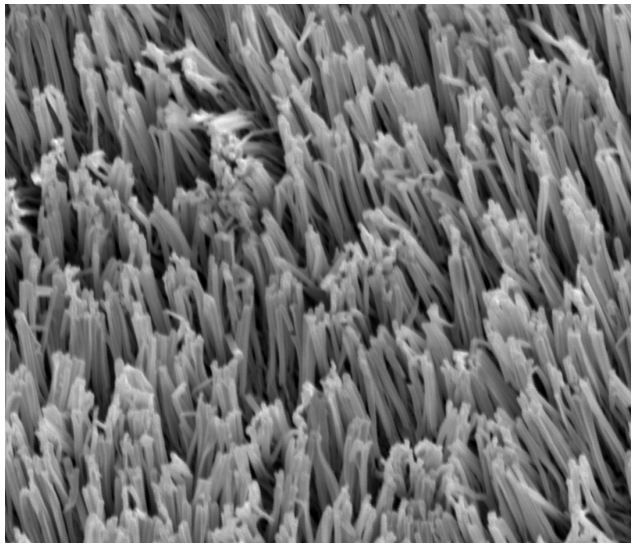

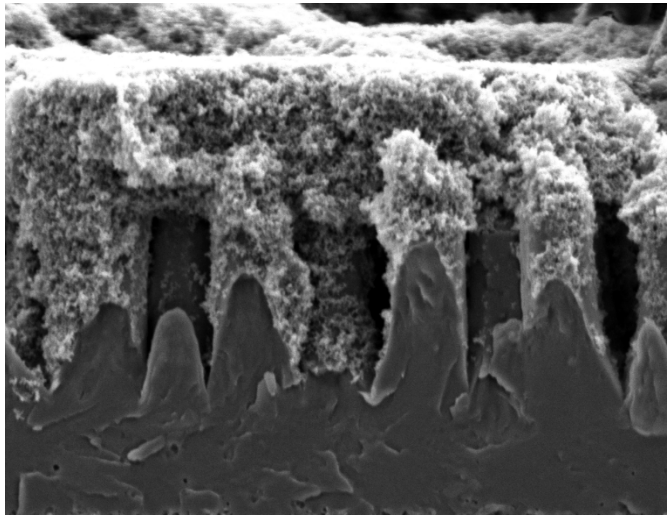

- Advanced electrode structures developed in FC-PAD and in LANL URFC project will be adapted for this project

Characterization and Modeling

Characterization techniques including:

- SEM
- TEM/STEM
- XCT
- XAS
- USAXS
- BET
- Neutron imaging

Modeling of kinetics and transport to guide design of accessible catalysts and accessible electrode structures

MEA Testing

- MEA-oriented project; little if any RDE work
- Initial work in 5 cm^2 differential cells
- Operating conditions ranging from hot and dry to cold and wet to determine performance under real world conditions
- Use of helox and impedance transport diagnostics
- Successful catalysts/electrodes scaled up to 50 cm^2 testing
- Durability testing using steady-state holds and drive-cycle testing

Schedule

	Task/Subtask	FY 2019				FY 2020			
		Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4
T1	**Accessible Electrode Structures**								
T1.1	Proton Channel Electrodes	M1							
T1.2	Oxygen Channel Electrodes								
T1.3	Multi Channel Electrodes						M6		
T1.4	Catalyst Porosity								
T1.5	Novel Proton Conductors								
T2	**Accessible Catalyst Structures**								
T2.1	Control of Particle Size		M2		M4/GNG				
T2.2	Control of Agglomerate Size								
T2.3	Enhanced Transport in Particles/Agglomerates					M5			
T3	**Characterization and Modeling**								
T3.1	Characterization								
T3.2	Multiscale Modeling			M3					
T4	**MEA Testing**								
T4.1	Performance Testing								M8
T4.2	Durability Testing							M7	

Collaboration and Coordination: Interactions with ElectroCat

- *PGM-free Catalyst Synthesis, Analytical Characterization, and Electrochemical and Fuel Cell Testing (LANL).* SOA catalysts supplied by ElectroCat will be used for accessible electrode development, while synthesis procedures will be adapted in collaboration with ElectroCat for accessible catalysts.
- *Segmented Cell and Neutron Imaging (LANL).* Neutron imaging will be used to assess local water saturation in accessible electrodes.
- *X-Ray Characterization Techniques (LANL).* Micro-XCT will be used to characterize microscale electrode structure.
- *Electrode Microstructure Characterization and Simulation; In situ and Operando Atomic, Nano, and Micro-structure Characterization (ANL)*. Nano-XCT will be used to characterize nanoscale electrode structure. In situ nano-XCT will enable direct visualization of water distribution with the electrode. USAXS will provide catalyst agglomerate measurements.

Collaboration and Coordination: Interactions with ElectroCat

- *Kinetics and Transport (NREL).* Transport diagnostics will be used to measure electrode transport limitations.
- *Modeling Kinetic and Transport Processes in PGM-free Electrodes (ANL).* Multiscale modeling will be instrumental in guiding design of accessible catalyst and electrode structures.
- *In situ Fluoride and Carbon Dioxide Emission Measurements (LANL).* In situ diagnostics will be used to characterize the relationship between transport and durability.
- *High-resolution Analytical Scanning Transmission Electron Microscopy; Electron Tomography (ORNL).* These techniques will be used to characterize accessible catalyst structures.

Remaining Challenges and Barriers

- Fabricating accessible electrode structures with high design fidelity
- Synthesizing PGM-free catalysts with high nanoscale accessibility

Los Alamos NATIONAL LABORATORY

Proposed Future Work

This project has just begun, so almost all work is future work

- Designing, fabricating, and demonstrating accessible PGM-free electrode structures
- Synthesizing accessible PGM-free catalysts
- Modeling transport and kinetics in PGM-free catalysts and electrodes
- Characterizing PGM-free catalysts and electrodes and performing in situ and in operando diagnostics
- Fuel cell testing, including durability

Los Alamos NATIONAL LABORATORY

Summary

Objective: Design accessible PGM-free catalysts and electrodes with facile transport of H^+ and O_2, and demonstrate in high-performance, durable MEAs.

Relevance: Project directly addresses cost, durability, and performance through key DOE targets:

- MEA performance > 44 mA/cm^2 @ 0.9 $V_{iR\text{-}free}$, H_2/O_2, 150 kPa_{abs}
- MEA performance > 300 mA/cm^2 @ 0.8 V, H_2/air, 150 kPa_{abs}
- Power density > 1 W/cm^2
- Cost < $40/kW (near-term), < $30/kW (ultimate)

Approach: Develop PGM-free electrodes with rapid micron-scale transport of O_2 and H^+ using non-tortuous transport channels and control of local hydrophobicity/hydrophilicity. Develop PGM-free catalysts with rapid nanometer-scale transport of O_2 and H^+ through control of nanostructure, including metal site clustering and particle agglomeration

Accomplishments: Project just started. Accomplishments to date are limited to procuring materials, preparing test infrastructure, and producing proof-of-concept structures

Collaborations: Extensive collaboration and utilization of ElectroCat consortium capabilities